
VID on VDP Reply Sequence Diagrams

Bob Sultan (bsultan@huawei.com)

Li YiZhou (<u>liyizhou@huawei.com</u>)


Ben Mack-Crane (tmackcrane@huawei.com)

Typical Enterprise Data Center

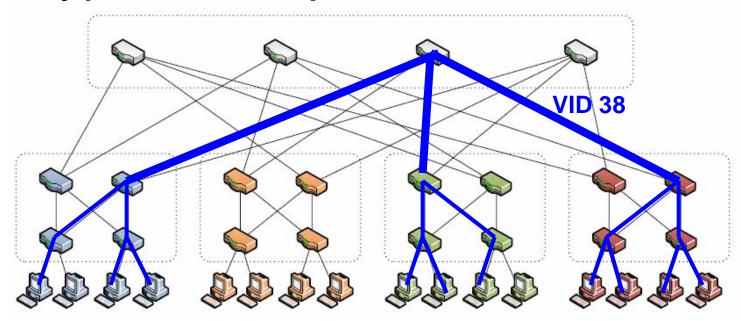


- Relatively small number of VLANs (<< 4K);
- VLAN identified by same VID throughout data center;
 - VID 38 might represent 'web server traffic' or 'engineering organization';
 - Static and global nature of VID allows it to be known to the Server Admin;

Scenario 1: Filter on (MAC, VID) pairs VID Global and known to Server

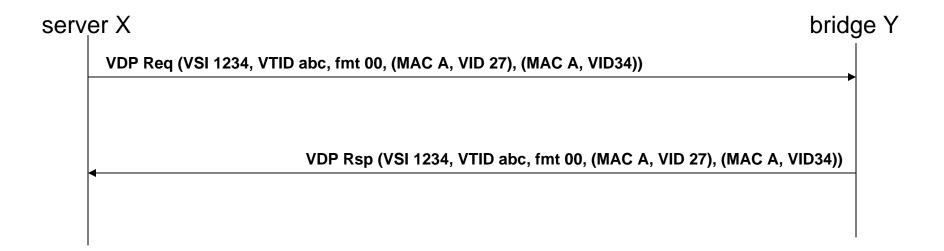

- VDP Req instructs bridge to use the filter ((MAC A, VID 27) (MAC A, VID 34)) to identify traffic associated with VSI 1234 in order to apply VSI-type identified by VTID abc;
- This VDP message would carry a 'MAC/VLAN Format' value of 'Basic MAC/VLAN Format' = 00;

Scenario 2: Filter on VID list VID Global and known to Server

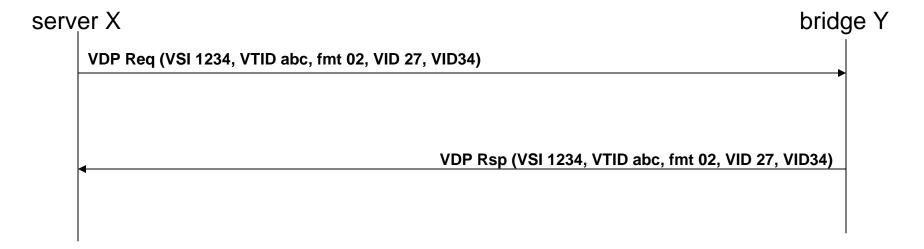


- VDP Req instructs bridge to use the filter (VID 27, VID 34) to identify traffic associated with VSI 1234 in order to apply VSI-type identified by VTID abc;
- This VDP message would carry a 'MAC/VLAN Format' value of 'VID-only format' = 02;
- Same as scenario 1 except that VID list replaces list of (MAC, VID) pairs;

Cloud Service Provider Jack's Garden Markets **Rack 115 Rack 114 Rack 116 VID 35 VID 1028** VID 314


- Data Center providing cloud services likely to have >4K
 Service Instances;
 - Any one rack supports up to 4K;
- Global ID "Jack's Garden Markets" is mapped to different VID at each rack boundary;
- Network Admin (vs. Server Admin) must control assignment of VID to Service Instance at each rack;

Scenario 3: Filter on (MAC, VID) pairs; VID assigned by *Bridge*

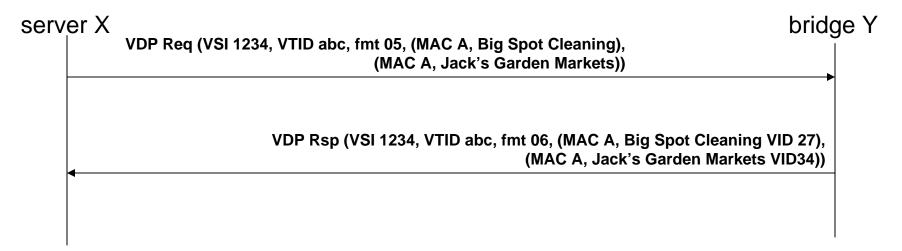


- VDP Req instructs bridge to use the filter ((MAC A, GroupName1)
 (MAC A, GroupName2)) to identify traffic associated with VSI 1234
 in order to apply VSI-type identified by VTID abc;
- Bridge determines that GroupName1 is associated with VID 27 and GroupName2 is associated with VID 34 in the local rack; The bridge will use the filter ((MAC A, VID 27), (MAC A, VID 34));
- Bridge supplies server with the local VID values associated with the GroupNames;
- The VDP Req carries a 'MAC/VLAN Format' value of 'MAC/GroupName' = 05 and the VDP Rsp carries a 'MAC/VLAN Format' value of 'MAC/GroupName/VID' = 06;

Scenario 4: Filter on VID list; VID assigned by *Bridge*

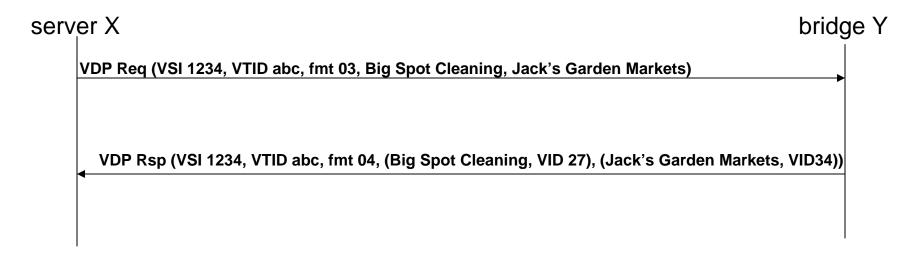

- VDP Req instructs bridge to use the filter (GroupName1, GroupName2)) to identify traffic associated with VSI 1234 in order to apply VSI-type identified by VTID abc;
- Bridge determines that GroupName1 is associated with VID 27 and GroupName2 is associated with VID 34 in the local rack; The bridge will use the filter (VID 27, VID 34);
- Bridge supplies server with the local VID values associated with the GroupNames;
- The VDP Req carries a 'MAC/VLAN Format' value of 'GroupName' = 03 and the VDP Rsp carries a 'MAC/VLAN Format' value of 'GroupName/VID' = 04;

Scenario 5: Filter specified by VSI-type

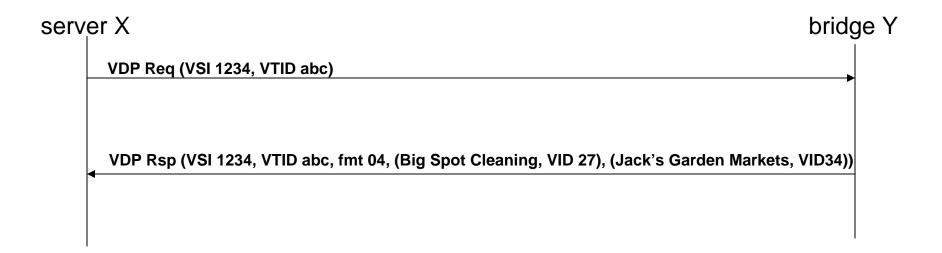

- VDP Req provides no filter info;
- Bridge finds filter info in VSI-type; say, (VID 27, VID 34);
- Bridge determines that GroupName1 is associated with VID 27 and GroupName2 is associated with VID 34 in the local rack; The bridge will use the filter (VID 27, VID 34);
- Bridge supplies server with the local VID values associated with the GroupNames;
- The VDP Rsp carries a 'MAC/VLAN Format' value of 'GroupName/VID' = 04;

Summary

- New flows for cloud service case where VID associated with a particular Service Instance can vary from rack to rack;
 - Server can no longer specify VID in VDP
- Flows same as existing except server specifies global 'GroupName' instead of local 'VID';
 - Bridge replies to server with GroupName ←→ VID mapping that server uses for data traffic;
- Additional case in which filter is not specified in VDP but obtained from VSI-type;
 - Bridge replies with local VID value corresponding to GroupName found in VSI-type;
- New flows imply no change to VDP state machines;
- Does require additional values of the 'MAC/VLAN Format' field;
 - change is fully specified in accompanying document VidInVdpRsp
- This is a very simple but essential feature if cloud service data centers are to be supported by Qbg;