

# Time Sync Configuration for IEC/IEEE 60802


Martin Mittelberger (Siemens AG)

01/2023

v02

## 1 Overall structure

This contribution describes the time sync configuration for a 60802 IA end station which is an IA-device connected to an IA-controller.

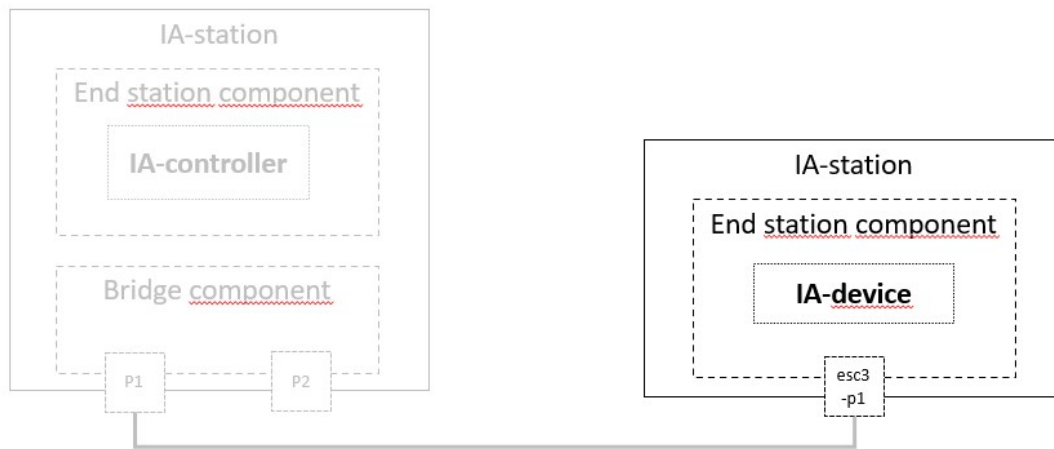

## 2 IA-device properties

- Simple end station with one port
- MAC-Address: aa-bb-cc-dd-ee-ff
- IP-Address: 192.168.0.1
- One external interface: esc3-p1

### 3 YANG Instance File (based on current drafts)

The YANG instance file contains all leaves which are proposed to be mandatory in 60802.

Since there is no released YANG model for time sync now, it is based on ieee1588-ptp (revision 2022-08-30) and ieee802-dot1as-ptp (revision 2022-09-16).

Note: The basis of the instance files is JSON. Despite JSON doesn't allow comments, C-style comments are inserted here for clarification.

#### 3.1 Configuration elements

```
{
  "ieee1588-ptp:ptp": {
    "instances": {
      "instance": [
        {
          "instance-index": 0,          // working clock
          "default-ds": {
            "domain-number": 32,       // working clock
            "slave-only": true,
            "sdo-id": 256,             // gPTP
            "instance-enable": true,
            "external-port-config-enable": true,
            "instance-type": "oc"
          },
          "description-ds": {
            "user-description": "60802-Working-Clock"
          },
          "ports": {
            "port": [
              {
                "port-index": 0,
                "underlying-interface": "esc3-p1",
                "port-ds": {
                  "delay-mechanism": "common-p2p",
                  "port-enable": true,
                  "ieee802-dot1as-ptp:sync-receipt-timeout": 3,
                  "ieee802-dot1as-ptp:use-mgt-one-step-tx-oper": true,
                  "ieee802-dot1as-ptp:mgt-one-step-tx-oper": 0
                },
                "external-port-config-port-ds": {
                  "desired-state": "slave"
                }
              }
            ]
          }
        }
      ]
    },
    {
      "instance-index": 1,          // global time
      "default-ds": {
        "domain-number": 2,         // global time
        "slave-only": true,
        "sdo-id": 256,             // gPTP
        "instance-enable": true,
        "external-port-config-enable": true,
        "instance-type": "oc"
      },
      "description-ds": {
        "user-description": "60802-Global-Time"
      },
      "ports": {
        "port": [
          {
            "port-index": 0,
            "underlying-interface": "esc3-p1",
            "port-ds": {
              "delay-mechanism": "common-p2p",
              "port-enable": true,
              "ieee802-dot1as-ptp:sync-receipt-timeout": 3,
              "ieee802-dot1as-ptp:use-mgt-one-step-tx-oper": true,
              "ieee802-dot1as-ptp:mgt-one-step-tx-oper": 0
            }
          }
        ]
      }
    }
  }
}
```



```

        "port-ds": {
            "port-state": "slave",
            "delay-mechanism": "common-p2p",
            "port-enable": true,
            "ieee802-dot1as-ptp:sync-receipt-timeout": 3,
            "ieee802-dot1as-ptp:current-one-step-tx-oper": 0,
            "ieee802-dot1as-ptp:use-mgt-one-step-tx-oper": true,
            "ieee802-dot1as-ptp:mgt-one-step-tx-oper": 0,
            "ieee802-dot1as-ptp:sync-locked": true
        },
        "external-port-config-port-ds": {
            "desired-state": "slave"
        }
    }
}
],
},
{
    "instance-index": 1,
    "default-ds": {
        "clock-identity": "AA-BB-CC-DD-EE-FF-00-03", // clock receiver
        "number-ports": 1,
        "domain-number": 2,
        "slave-only": true,
        "sdo-id": 256,
        "instance-enable": true,
        "external-port-config-enable": true,
        "instance-type": "oc",
        "ieee802-dot1as-ptp:gm-capable": false,
        "ieee802-dot1as-ptp:current-utc-offset-valid": false,
        "ieee802-dot1as-ptp:ptp-timescale": false
    },
    "description-ds": {
        "user-description": "60802-Global-Time"
    },
    "ports": {
        "port": [
            {
                "port-index": 0,
                "underlying-interface": "esc3-p1",
                "port-ds": {
                    "port-state": "slave",
                    "delay-mechanism": "common-p2p",
                    "port-enable": true,
                    "ieee802-dot1as-ptp:sync-receipt-timeout": 3,
                    "ieee802-dot1as-ptp:current-one-step-tx-oper": 0,
                    "ieee802-dot1as-ptp:use-mgt-one-step-tx-oper": true,
                    "ieee802-dot1as-ptp:mgt-one-step-tx-oper": 0,
                    "ieee802-dot1as-ptp:sync-locked": true
                },
                "external-port-config-port-ds": {
                    "desired-state": "slave"
                }
            }
        ]
    }
}
],
},
"common-services": {
    "cmlds": {
        "default-ds": {
            "clock-identity": "AA-BB-CC-DD-EE-FF-00-02", // local clock
            "number-link-ports": 1
        },
        "ports": {
            "port": [
                {
                    "port-index": 0,
                    "underlying-interface": "esc3-p1",
                    "link-port-ds": {
                        "port-identity": {
                            "clock-identity": "AA-BB-CC-DD-EE-FF-00-02",
                            "port-number": 1
                        },
                    },
                    "domain-number": 32,
                    "service-measurement-valid": true,
                }
            ]
        }
    }
}
}

```

```
        "mean-link-delay": "42",
        "scaled-neighbor-rate-ratio": 0,
        "log-min-pdelay-req-interval": -3,
        "version-number": 2,
        "minor-version-number": 1,
        "delay-asymmetry": "0",
        "ieee802-dot1as-ptp:cmllds-link-port-enabled": true,
        "ieee802-dot1as-ptp:is-measuring-delay": true,
        "ieee802-dot1as-ptp:as-capable-across-domains": true,
        "ieee802-dot1as-ptp:mean-link-delay-thresh": "52428800",
        "ieee802-dot1as-ptp:current-log-pdelay-req-interval": -3,
        "ieee802-dot1as-ptp:use-mgt-log-pdelay-req-interval": true,
        "ieee802-dot1as-ptp:mgt-log-pdelay-req-interval": -3,
        "ieee802-dot1as-ptp:current-compute-rate-ratio": 1,
        "ieee802-dot1as-ptp:use-mgt-compute-rate-ratio": true,
        "ieee802-dot1as-ptp:mgt-compute-rate-ratio": 1,
        "ieee802-dot1as-ptp:current-compute-mean-link-delay": 1,
        "ieee802-dot1as-ptp:use-mgt-compute-mean-link-delay": true,
        "ieee802-dot1as-ptp:mgt-compute-mean-link-delay": 1,
        "ieee802-dot1as-ptp:allowed-lost-responses": 3,
        "ieee802-dot1as-ptp:allowed-faults": 3
      }
    ]
  }
}
}
```

## 4 Instance files with additional elements required for 60802

### 4.1 Configuration elements

```
{
  "ieee1588-ptp:ptp": {
    "instances": {
      "instance": [
        {
          "instance-index": 0,
          "default-ds": {
            "domain-number": 32,
            "slave-only": true,
            "sdo-id": 256,
            "instance-enable": true,
            "external-port-config-enable": true,
            "instance-type": "oc",
            "ptp-timescale-admin": false
          },
          "description-ds": {
            "user-description": "60802-Working-Clock"
          },
          "ports": {
            "port": [
              {
                "port-index": 0,
                "underlying-interface": "esc3-p1",
                "port-ds": {
                  "delay-mechanism": "common-p2p",
                  "port-enable": true,
                  "ieee802-dot1as-ptp:sync-receipt-timeout": 3,
                  "ieee802-dot1as-ptp:use-mgt-one-step-tx-oper": true,
                  "ieee802-dot1as-ptp:mgt-one-step-tx-oper": 0
                },
                "external-port-config-port-ds": {
                  "desired-state": "slave"
                }
              }
            ]
          }
        }
      ]
    }
  }
}
```

```

    "instance-index": 1,
    "default-ds": {
      "domain-number": 2,
      "slave-only": true,
      "sdo-id": 256,
      "instance-enable": true,
      "external-port-config-enable": true,
      "instance-type": "oc",
      "ptp-timescale-admin": false
    },
    "description-ds": {
      "user-description": "60802-Global-Time"
    },
    "ports": {
      "port": [
        {
          "port-index": 0,
          "underlying-interface": "esc3-p1",
          "port-ds": {
            "delay-mechanism": "common-p2p",
            "port-enable": true,
            "ieee802-dot1as-ptp:sync-receipt-timeout": 3,
            "ieee802-dot1as-ptp:use-mgt-one-step-tx-oper": true,
            "ieee802-dot1as-ptp:mgt-one-step-tx-oper": 0
          },
          "external-port-config-port-ds": {
            "desired-state": "slave"
          }
        }
      ]
    }
  },
  "common-services": {
    "cmlds": {
      "ports": {
        "port": [
          {
            "port-index": 0,
            "underlying-interface": "esc3-p1",
            "link-port-ds": {
              "log-min-pdelay-req-interval": -3,
              "version-number": 2,
              "minor-version-number": 1,
              "delay-asymmetry": "0",
              "ieee802-dot1as-ptp:mean-link-delay-thresh": "52428800",
              "ieee802-dot1as-ptp:use-mgt-log-pdelay-req-interval": true,
              "ieee802-dot1as-ptp:mgt-log-pdelay-req-interval": -3,
              "ieee802-dot1as-ptp:use-mgt-compute-rate-ratio": true,
              "ieee802-dot1as-ptp:mgt-compute-rate-ratio": 1,
              "ieee802-dot1as-ptp:use-mgt-compute-mean-link-delay": true,
              "ieee802-dot1as-ptp:mgt-compute-mean-link-delay": 1,
              "ieee802-dot1as-ptp:allowed-lost-responses": 3,
              "ieee802-dot1as-ptp:allowed-faults": 3
            }
          }
        ]
      }
    }
  }
}

```

## 4.2 Configuration and status elements

```

{
  "ieee1588-ptp:ptp": {
    "max-ptp-instances": 2,
    "max-hot-standby-systems": 1,
    "gm-capable": {
      "ptp": false,
      "arb": false
    }
  },
  "instances": {

```

```

"instance": [
  {
    "instance-index": 0,
    "default-ds": {
      "clock-identity": "AA-BB-CC-DD-EE-FF-00-01",
      "number-ports": 1,
      "domain-number": 32,
      "slave-only": true,
      "sdo-id": 256,
      "instance-enable": true,
      "external-port-config-enable": true,
      "instance-type": "oc",
      "ieee802-dot1as-ptp:gm-capable": false,
      "ieee802-dot1as-ptp:current-utc-offset-valid": false,
      "ieee802-dot1as-ptp:ptp-timescale": false
      "ptp-timescale-admin": false,
      "application-clock": {
        "clock-source-identity": "AA-BB-CC-DD-EE-FF-00-02", // if instance is gm
        "clock-target-identity": "AA-BB-CC-DD-EE-FF-00-03", // if instance is not gm
        "clock-state": "in-sync",
      }
    },
    "description-ds": {
      "user-description": "60802-Working-Clock"
    },
    "ports": {
      "port": [
        {
          "port-index": 0,
          "underlying-interface": "esc3-p1",
          "port-ds": {
            "port-state": "slave",
            "delay-mechanism": "common-p2p",
            "port-enable": true,
            "ieee802-dot1as-ptp:sync-receipt-timeout": 3,
            "ieee802-dot1as-ptp:current-one-step-tx-oper": 0,
            "ieee802-dot1as-ptp:use-mgt-one-step-tx-oper": true,
            "ieee802-dot1as-ptp:mgt-one-step-tx-oper": 0,
            "ieee802-dot1as-ptp:sync-locked": true
          },
          "external-port-config-port-ds": {
            "desired-state": "slave"
          }
        }
      ]
    }
  },
  {
    "instance-index": 1,
    "default-ds": {
      "clock-identity": "AA-BB-CC-DD-EE-FF-00-03",
      "number-ports": 1,
      "domain-number": 2,
      "slave-only": true,
      "sdo-id": 256,
      "instance-enable": true,
      "external-port-config-enable": true,
      "instance-type": "oc",
      "ieee802-dot1as-ptp:gm-capable": false,
      "ieee802-dot1as-ptp:current-utc-offset-valid": false,
      "ieee802-dot1as-ptp:ptp-timescale": false
      "ptp-timescale-admin": false,
      "application-clock": {
        "clock-source-identity": "AA-BB-CC-DD-EE-FF-00-02", // if instance is gm
        "clock-target-identity": "AA-BB-CC-DD-EE-FF-00-03", // if instance is not gm
        "clock-state": "in-sync",
      }
    },
    "description-ds": {
      "user-description": "60802-Global-Time"
    },
    "ports": {
      "port": [
        {
          "port-index": 0,
          "underlying-interface": "esc3-p1",
          "port-ds": {

```

