


# .250-3000 SAVAGE

Designed by Charles Newton for Savage Arms Company, the .250-3000 derives its name from its original loading which propelled an 87-grain bullet at 3,000 fps.

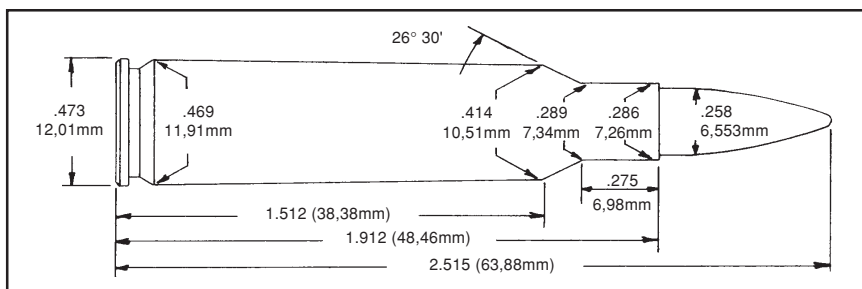

The .250 Savage (as it is known today) has been chambered in several firearms. It offers flat trajectory, excellent accuracy and adequate killing power on deer-sized animals while producing relatively light recoil and low noise. It is a fine choice for recoil sensitive shooters.

The SAAMI Maximum Average Pressure for this cartridge is 45,000 C.U.P.

<b>.250-3000 SAVAGE</b>			
Gun	DOUGLAS	Max Length	1.912"
Barrel Length	24"	Trim Length	1.892"
Primer	REM 9°	OAL Max	2.515"
Case	REM	OAL Min	2.320"

Bullet	START LOADS			MAXIMUM LOADS			C.U.P.	Cartridge Length	Comment
	Powder	Grains	Vel.	Powder	Grains	Vel.			
90 (L) RNGC	<b>5744</b>	15.0	1929	<b>5744</b>	19.0	2291	30,600	2.230"	Lyman
105 (L) RNGC	<b>5744</b>	15.0	1840	<b>5744</b>	19.0	2204	32,900	2.325"	Lyman
SRA 75 HP	<b>2015</b>	28.4	2741	<b>2015</b>	31.5	3115	41,400	2.465"	
	<b>2230</b>	30.2	2740	<b>2230</b>	33.5	3114	43,800		
	<b>2460</b>	30.6	2798	<b>2460</b>	34.0	3179	44,300		
	<b>2495</b>	30.6	2789	<b>2495</b>	34.0	3169	42,600		
	<b>2520</b>	30.6	2746	<b>2520</b>	34.0	3121	41,300		
	<b>4064</b>	32.4	2789	<b>4064</b>	36.0	3170	41,500		
	<b>2700</b>	35.6	2859	<b>2700</b>	37.5	3041	43,100		
	<b>4350</b>	36.9	2670	<b>4350</b>	41.0	3034	43,600		Compressed
<b>3100</b>	36.9	2407	<b>3100</b>	41.0	2735	36,500	Compressed		
SRA 90 HPBT	<b>2015</b>	27.5	2578	<b>2015</b>	30.5	2929	41,400	2.460"	
	<b>2230</b>	28.8	2556	<b>2230</b>	32.0	2905	41,000		
	<b>2460</b>	28.8	2549	<b>2460</b>	32.0	2897	41,200		
	<b>2495</b>	29.3	2598	<b>2495</b>	32.5	2952	42,500		
	<b>2520</b>	29.3	2554	<b>2520</b>	32.5	2902	41,200		
	<b>4064</b>	31.5	2637	<b>4064</b>	35.0	2997	42,400		
	<b>2700</b>	34.2	2680	<b>2700</b>	36.0	2851	43,800		
	<b>4350</b>	36.0	2579	<b>4350</b>	40.0	2931	44,800		Compressed
<b>3100</b>	36.9	2403	<b>3100</b>	41.0	2731	41,900	Compressed		

## .250-3000 SAVAGE (continued)

Bullet	START LOADS			MAXIMUM LOADS			C.U.P.	Cartridge Length	Comment
	Powder	Grains	Vel.	Powder	Grains	Vel.			
HDY 100 SP	<b>2015</b>	27.0	2457	<b>2015</b>	30.0	2792	43,100	2.500"	
	<b>2230</b>	27.0	2343	<b>2230</b>	30.0	2662	40,400		
	<b>2460</b>	27.9	2365	<b>2460</b>	31.0	2687	38,700		
	<b>2495</b>	28.8	2435	<b>2495</b>	32.0	2767	43,600		
	<b>2520</b>	28.8	2429	<b>2520</b>	32.0	2760	42,300		
	<b>4064</b>	31.5	2520	<b>4064</b>	35.0	2864	41,500		
	<b>2700</b>	33.3	2549	<b>2700</b>	35.0	2712	42,000		
	<b>4350</b>	35.1	2447	<b>4350</b>	39.0	2781	42,500		
	<b>3100</b>	36.9	2347	<b>3100</b>	41.0	2667	40,600	Compressed	
SRA 117 SBT	<b>2015</b>	25.7	2262	<b>2015</b>	28.5	2571	45,000	2.515"	
	<b>2230</b>	26.1	2208	<b>2230</b>	29.0	2509	43,000		
	<b>2460</b>	26.6	2198	<b>2460</b>	29.5	2498	40,800		
	<b>2495</b>	27.0	2259	<b>2495</b>	30.0	2567	45,000		
	<b>2520</b>	27.0	2225	<b>2520</b>	30.0	2528	44,300		
	<b>4064</b>	28.8	2289	<b>4064</b>	32.0	2602	42,000		
	<b>2700</b>	31.4	2340	<b>2700</b>	33.0	2489	41,100		
	<b>4350</b>	33.3	2311	<b>4350</b>	37.0	2626	42,300		
	<b>3100</b>	36.9	2334	<b>3100</b>	41.0	2652	43,700	Compressed	