


# .300 SAVAGE

Introduced by Savage Arms Company for the Model 99 lever action in 1920, the .300 Savage was intended to duplicate the performance of the original U.S. Ball Cartridge, caliber .30, Model of 1906.

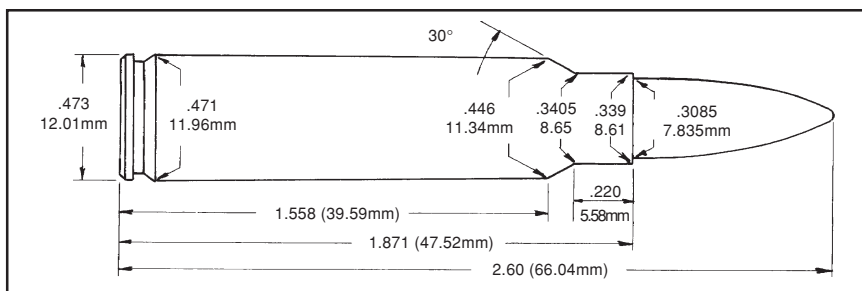

The .300 Savage is the perfect complement to the Model 99 lever action rifle. Until the introduction of the .308 Winchester, the .300 Savage was the only .30-caliber cartridge suitable for use in short action rifles. While not recommended for large bear, the .300 Savage has proven its effectiveness on all other large game in North America under most conditions. The .300 Savage is an excellent hunting cartridge as is. Shooters shouldn't attempt to squeeze out the last bit of velocity possible.

When loading pointed projectiles in this cartridge, bullets with shorter ogives are best suited for the Savage 99.

The SAAMI Maximum Average Pressure for the .300 Savage is 46,000 C.U.P.

<b>.300 SAVAGE</b>				
Gun	DOUGLAS	Max Length	1.871"	
Barrel Length	24"	Trim Length	1.851"	
Primer	REM 9°	OAL Max	2.600"	
Case	FC	OAL Min	2.495"	

Bullet	START LOADS			MAXIMUM LOADS			C.U.P.	Cartridge Length	Comment
	Powder	Grains	Vel.	Powder	Grains	Vel.			
PMC 150 FMJ	<b>2015</b>	34.7	2413	<b>2015</b>	38.5	2742	43,600	2.600"	
	<b>2230</b>	35.3	2345	<b>2230</b>	39.2	2665	43,500		
	<b>2460</b>	36.0	2378	<b>2460</b>	40.0	2702	43,200		
	<b>2495</b>	37.8	2405	<b>2495</b>	42.0	2733	40,000		Compressed
	<b>2520</b>	38.3	2433	<b>2520</b>	42.5	2765	43,400		
	<b>2700</b>	41.8	2408	<b>2700</b>	44.0	2562	42,900		
	<b>4350</b>	39.6	2128	<b>4350</b>	44.0	2418	35,100		Compressed
REM 165 PSPCL	<b>2015</b>	33.8	2261	<b>2015</b>	37.5	2569	41,900	2.580"	
	<b>2230</b>	35.6	2282	<b>2230</b>	39.5	2593	45,000		
	<b>2460</b>	36.0	2280	<b>2460</b>	40.0	2591	44,200		
	<b>2495</b>	36.9	2355	<b>2495</b>	41.0	2676	44,000		
	<b>2520</b>	37.8	2331	<b>2520</b>	42.0	2649	43,800		
	<b>2700</b>	41.3	2269	<b>2700</b>	43.5	2414	43,600		
	<b>4350</b>	39.6	2069	<b>4350</b>	44.0	2351	36,400		

## .300 SAVAGE (continued)

Bullet	START LOADS			MAXIMUM LOADS			C.U.P.	Cartridge Length	Comment
	Powder	Grains	Vel.	Powder	Grains	Vel.			
SRA 180 SBT	<b>2015</b>	32.4	2172	<b>2015</b>	36.0	2468	44,400	2.590"	
	<b>2230</b>	33.3	2134	<b>2230</b>	37.0	2425	43,700		
	<b>2460</b>	33.8	2137	<b>2460</b>	37.5	2428	40,800		
	<b>2495</b>	35.1	2194	<b>2495</b>	39.0	2493	41,600		
	<b>2520</b>	35.1	2203	<b>2520</b>	39.0	2503	45,000		
	<b>2700</b>	39.4	2203	<b>2700</b>	41.5	2344	44,100		
	<b>4350</b>	38.7	2047	<b>4350</b>	43.0	2326	39,800		