
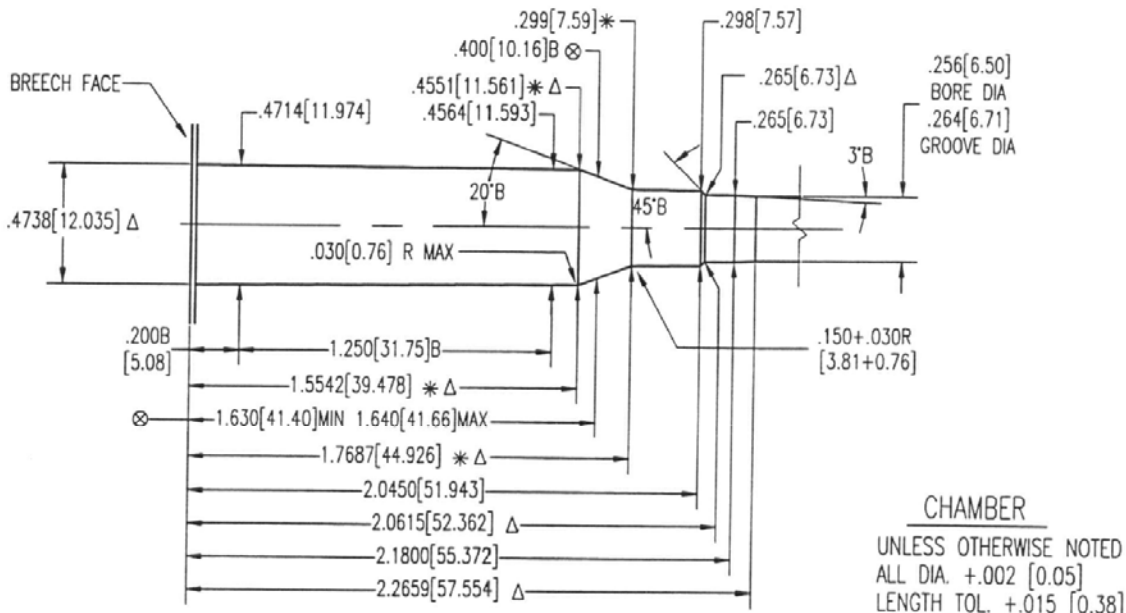


[Click HERE to return to the Table of Contents](#)

MAXIMUM CARTRIDGE / MINIMUM CHAMBER

260 REMINGTON

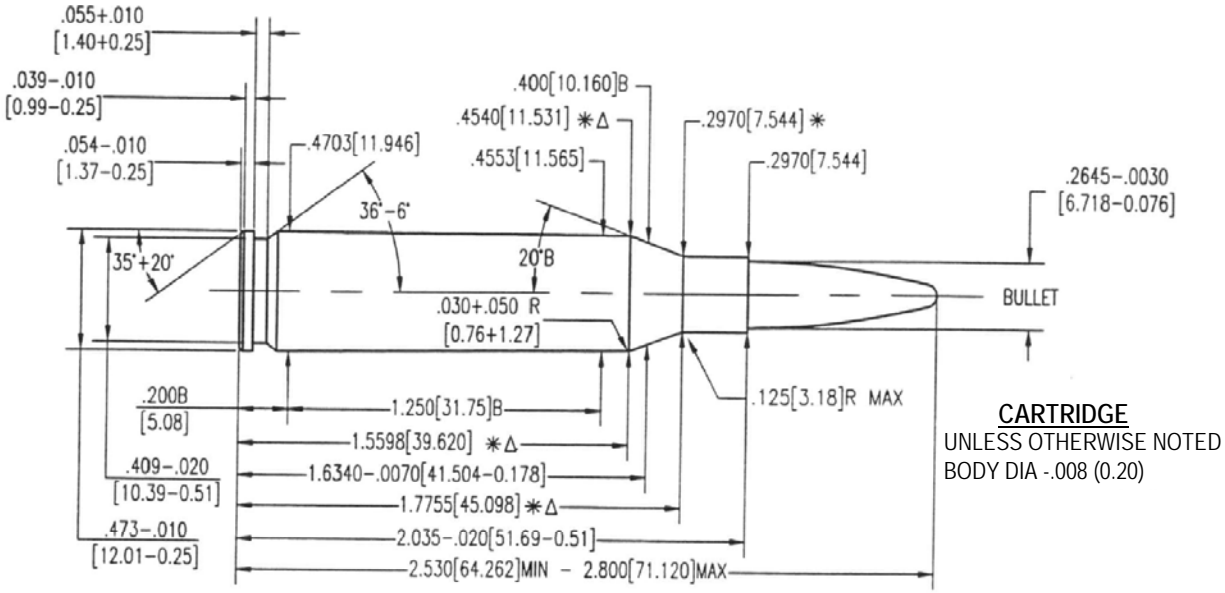

NOTE:
B=BASIC
[XX.XX]=MILLIMETERS
⊗ = HEADSPACE DIMENSION
Δ = REFERENCE DIMENSION
* DIMENSIONS ARE TO INTERSECTION OF LINE
ALL CALCULATIONS APPLY AT MAXIMUM MATERIAL CONDITION (MMC)

Δ 6 GROOVES
Δ .095+.002 [2.41+0.05] WIDE
TWIST: 9[228] R.H. OPTIONAL
MIN. BORE & GROOVE
AREA: .0538 SQ. IN.
[34.709 mm²]