

# **TR-355a2**

## **YANG Modules for FTTdp Management**

**Issue: 1 Amendment 2**  
**Issue Date: June 2019**

## Notice

The Broadband Forum is a non-profit corporation organized to create guidelines for broadband network system development and deployment. This Technical Report has been approved by members of the Forum. This Technical Report is subject to change. This Technical Report is copyrighted by the Broadband Forum, and all rights are reserved. Portions of this Technical Report may be copyrighted by Broadband Forum members.

## Intellectual Property

Recipients of this Technical Report are requested to submit, with their comments, notification of any relevant patent claims or other intellectual property rights of which they may be aware that might be infringed by any implementation of this Technical Report, or use of any software code normatively referenced in this Technical Report, and to provide supporting documentation.

## Terms of Use

### 1. License

Broadband Forum hereby grants you the right, without charge, on a perpetual, non-exclusive and worldwide basis, to utilize the Technical Report for the purpose of developing, making, having made, using, marketing, importing, offering to sell or license, and selling or licensing, and to otherwise distribute, products complying with the Technical Report, in all cases subject to the conditions set forth in this notice and any relevant patent and other intellectual property rights of third parties (which may include members of Broadband Forum). This license grant does not include the right to sublicense, modify or create derivative works based upon the Technical Report except to the extent this Technical Report includes text implementable in computer code, in which case your right under this License to create and modify derivative works is limited to modifying and creating derivative works of such code. For the avoidance of doubt, except as qualified by the preceding sentence, products implementing this Technical Report are not deemed to be derivative works of the Technical Report.

### 2. NO WARRANTIES

THIS TECHNICAL REPORT IS BEING OFFERED WITHOUT ANY WARRANTY WHATSOEVER, AND IN PARTICULAR, ANY WARRANTY OF NONINFRINGEMENT IS EXPRESSLY DISCLAIMED. ANY USE OF THIS TECHNICAL REPORT SHALL BE MADE ENTIRELY AT THE IMPLEMENTER'S OWN RISK, AND NEITHER THE BROADBAND FORUM, NOR ANY OF ITS MEMBERS OR SUBMITTERS, SHALL HAVE ANY LIABILITY WHATSOEVER TO ANY IMPLEMENTER OR THIRD PARTY FOR ANY DAMAGES OF ANY NATURE WHATSOEVER, DIRECTLY OR INDIRECTLY, ARISING FROM THE USE OF THIS TECHNICAL REPORT.

### 3. THIRD PARTY RIGHTS

Without limiting the generality of Section 2 above, BROADBAND FORUM ASSUMES NO RESPONSIBILITY TO COMPILE, CONFIRM, UPDATE OR MAKE PUBLIC ANY THIRD PARTY ASSERTIONS OF PATENT OR OTHER INTELLECTUAL PROPERTY RIGHTS THAT MIGHT NOW OR IN THE FUTURE BE INFRINGED BY AN IMPLEMENTATION OF THE TECHNICAL REPORT IN ITS CURRENT, OR IN ANY FUTURE FORM. IF ANY SUCH

RIGHTS ARE DESCRIBED ON THE TECHNICAL REPORT, BROADBAND FORUM TAKES NO POSITION AS TO THE VALIDITY OR INVALIDITY OF SUCH ASSERTIONS, OR THAT ALL SUCH ASSERTIONS THAT HAVE OR MAY BE MADE ARE SO LISTED.

The text of this notice must be included in all copies of this Technical Report.

Issue History

Issue Number	Approval Date	Publication Date	Issue Editor	Changes
1	18 July 2016	5 August 2016	Ken Kerpez, ASSIA Joey Boyd, Adtran William Lupton, BBF	Original
1 Corrigendum 1	13 March 2017	12 April 2017	Joey Boyd, ADTRAN Ken Kerpez, ASSIA	This is not backward compatible with Issue 1.
1 Corrigendum 2	27 November 2017	19 January 2018	Joey Boyd, ADTRAN Ken Kerpez, ASSIA	Bug fixes
1 Amendment 1	1 October 2018	1 October 2018	Joey Boyd, ADTRAN Ken Kerpez, ASSIA	Add support for additions and changes from amendments to ITU-T G.996.2, G.997.1 and G.997.2. Add support for Reverse power feeding of a DPU.
1 Amendment 2	11 June 2019	11 June 2019	Joey Boyd, ADTRAN Ken Kerpez, ASSIA	Add support for additions and changes from amendments to ITU-T G.997.1 and ITU-T G.997.2.

Comments or questions about this Broadband Forum Technical Report should be directed to [info@broadband-forum.org](mailto:info@broadband-forum.org).

<b>Editors</b>	Joey Boyd	ADTRAN
	Ken Kerpez	ASSIA
<b>YANG Modules Project Stream Leaders</b>	Joey Boyd	ADTRAN
	Ken Kerpez	ASSIA
<b>Common YANG Work Area Directors</b>	Sven Ooghe	Nokia
	Joey Boyd	ADTRAN

**Table of Contents**

Executive Summary .....6

1 Purpose and Scope .....7

    1.1 Purpose.....7

    1.2 Scope.....7

2 References and Terminology .....8

    2.1 Conventions.....8

    2.2 References .....8

    2.3 Definitions.....9

    2.4 Abbreviations .....9

3 Technical Report Impact ..... 11

    3.1 Energy Efficiency.....11

    3.2 IPv6 .....11

    3.3 Security .....11

    3.4 Privacy .....11

4 Modules ..... 12

    4.1 bbf-fastdsl.yang .....12

    4.2 bbf-ghs .....12

    4.3 bbf-fast .....13

    4.4 bbf-vdsl .....13

    4.5 bbf-selt .....13

    4.6 bbf-melt .....13

    4.7 bbf-hardware-rpf-dpu .....14

5 Documentation ..... 15

6 Dependencies on Related YANG modules and Standards..... 16

7 DPU/PMA Behavior ..... 17

8 YANG Modules Supported by a DPU ..... 18

## **Executive Summary**

This Technical Report defines YANG data models for the management interfaces to support FTTdp. These models are to enable interoperability for FTTdp management.

# 1 Purpose and Scope

## 1.1 Purpose

This Technical Report defines YANG data models for the management interfaces to support FTTdp. These models are to enable interoperability for FTTdp management.

## 1.2 Scope

This Technical Report currently defines the following common YANG modules:

- bbf-yang-types: Common BBF YANG types.

This Technical Report currently defines the following interface-related YANG modules:

- bbf-fastdsl: An interface object supporting xDSL and G.fast.
- bbf-ghs: Includes standardized parameters to startup (“handshake”) G.fast or VDSL.
- bbf-fast: Includes all standardized parameters for G.fast configuration, status monitoring, performance management, testing and diagnostics.
- bbf-vdsl: Includes all standardized parameters for VDSL2 configuration, status monitoring, performance management, testing and diagnostics.
- bbf-selt: Includes all standardized parameters for configuration and test results of Single-Ended Line Test (SELT).
- bbf-melt: Includes all standardized parameters for configuration and test results of Metallic Line Test (MELT).
- bbf-hardware-rpf-dpu: Includes all standardized parameters for Reverse Power Feeding (RPF) configuration, status monitoring and event notifications.

Future Amendments are likely to define additional YANG modules.

The YANG modules of TR-355 are posted on GitHub at <https://github.com/BroadbandForum/yang>. This Technical Report documents the theory of operation and organization of these YANG modules and contains high-level descriptions and pointers to more detailed documentation in the YANG files.

Section 4 of this document briefly outlines the modules defined in TR-355. Section 5 describes the documentation included in the modules in TR-355.

## 2 References and Terminology

### 2.1 Conventions

In this Technical Report, several words are used to signify the requirements of the specification. These words are always capitalized. More information can be found in RFC 2119 [1].

<b>MUST</b>	This word, or the term “REQUIRED”, means that the definition is an absolute requirement of the specification.
<b>MUST NOT</b>	This phrase means that the definition is an absolute prohibition of the specification.
<b>SHOULD</b>	This word, or the term “RECOMMENDED”, means that there could exist valid reasons in particular circumstances to ignore this item, but the full implications need to be understood and carefully weighed before choosing a different course.
<b>SHOULD NOT</b>	This phrase, or the phrase "NOT RECOMMENDED" means that there could exist valid reasons in particular circumstances when the particular behavior is acceptable or even useful, but the full implications need to be understood and the case carefully weighed before implementing any behavior described with this label.
<b>MAY</b>	This word, or the term “OPTIONAL”, means that this item is one of an allowed set of alternatives. An implementation that does not include this option <b>MUST</b> be prepared to inter-operate with another implementation that does include the option.

### 2.2 References

The following references are of relevance to this Technical Report. At the time of publication, the editions indicated were valid. All references are subject to revision; users of this Technical Report are therefore encouraged to investigate the possibility of applying the most recent edition of the references listed below.

A list of currently valid Broadband Forum Technical Reports is published at [www.broadband-forum.org](http://www.broadband-forum.org).

Document	Title	Source	Year
[1] <a href="#">RFC 2119</a>	<i>Key words for use in RFCs to Indicate Requirement Levels</i>	IETF	1997
[2] <a href="#">RFC 7223</a>	<i>A YANG Data Model for Interface Management</i>	IETF	2014
[3] <a href="#">RFC 6991</a>	<i>Common YANG Data Types</i>	IETF	2013
[4] <a href="#">RFC 7950</a>	<i>The YANG 1.1 Data Modeling Language</i>	IETF	2016



- |      |                            |  |       |      |
|------|----------------------------|--|-------|------|
| [5]  | <a href="#">RFC 8348</a>   | <i>A YANG Data Model for Hardware Management</i>   | IETF  | 2018 |
| [6]  | <a href="#">TR-301i2c1</a> | <i>Architecture and Requirements for Fiber to the Distribution Point</i>                   | BBF   | 2019 |
| [7]  | <a href="#">TR-252i3</a>   | <i>xDSL Protocol-Independent Management Model</i>  | BBF   | 2013 |
| [8]  | <a href="#">TR-371</a>     | <i>G.fast Vector of Profiles (VoP) Managed Object Structure</i>                            | BBF   | 2016 |
| [9]  | <a href="#">TR-298i2</a>   | <i>Management model for DSL line test</i>  | BBF   | 2017 |
| [10] | <a href="#">G.9700</a>     | <i>Fast access to subscriber terminals (G.fast) – Power spectral density specification</i> | ITU-T | 2014 |
| [11] | <a href="#">G.9701</a>     | <i>Fast access to user terminals (FAST) - Physical layer specification</i>                 | ITU-T | 2014 |
| [12] | <a href="#">G.997.1</a>    | <i>Physical layer management for digital subscriber line (DSL) transceivers</i>            | ITU-T | 2012 |
| [13] | <a href="#">G.997.2</a>    | <i>Physical layer management for G.fast transceivers</i>                                   | ITU-T | 2015 |
| [14] | <a href="#">G.994.1</a>    | <i>Handshake procedures for digital subscriber line (DSL) transceivers</i>                 | ITU-T | 2012 |
| [15] | <a href="#">G.996.2</a>    | <i>Single-ended line testing for digital subscriber lines (DSL)</i>                        | ITU-T | 2009 |
| [16] | <a href="#">TR-383a2</a>   | <i>Common YANG Modules for Access Networks – Amendment 2</i>                               | BBF   | 2018 |

## 2.3 Definitions

The following terminology is used throughout this Technical Report.

<b>DP</b>	Distribution Point. The location in the Fiber To The Distribution Point architecture that provides the distribution of user traffic from fiber backhaul to copper drop points.
<b>DPU</b>	Distribution Point Unit. The node that resides at the DP in the Fiber To The Distribution Point architecture.
<b>FTTdp</b>	Fiber To The Distribution Point.
<b>PMA</b>	Persistent Management Agent. A management proxy for the DPU that caches provisioning and last known status information for the DPU.

## 2.4 Abbreviations

This Technical Report uses the following abbreviations:

FAST	Fast Access To Subscriber Terminals
MELT	Metallic Line Test

SELT	Single Ended Line Test
VoP	Vector of Profiles
xDSL	Any Digital Subscriber Line Service

### **3 Technical Report Impact**

#### **3.1 Energy Efficiency**

TR-355a2 has no impact on energy efficiency.

#### **3.2 IPv6**

TR-355a2 has no impact on IPv6.

#### **3.3 Security**


TR-355a2 has no impact on security.

#### **3.4 Privacy**

Any issues regarding privacy are not affected by TR-355a2.

## 4 Modules

The YANG modules contained in TR-355 are briefly described here. The figure below provides a high level view of the functionality covered by this Technical Report (BBF YANG in green):

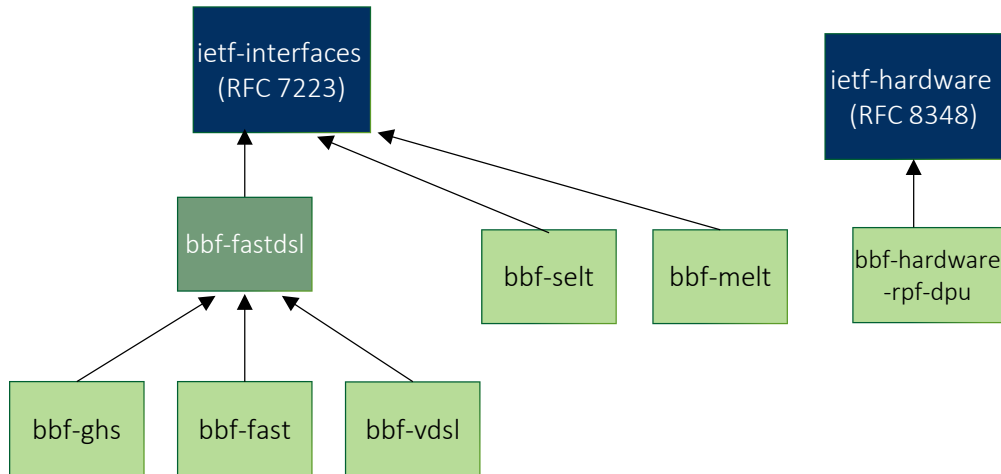

**Figure 1 – YANG Data Model Relationships**

### 4.1 bbf-fastdsl.yang

The bbf-fastdsl module's YANG file, bbf-fastdsl.yang, is in the *interface* directory. This module defines management objects related to an interface which may support one or more xDSL or G.fast technologies. bbf-fastdsl allows bbf-vdsl, bbf-fast and bbf-ghs to be associated with to a single interface: bbf-fastdsl augments ietf-interfaces and bbf-fastdsl is in turn augmented by bbf-vdsl, bbf-fast and bbf-ghs. Also, bbf-fastdsl defines supported-mode, configured-mode, and operational-mode for the interface.

Documentation is in the *interface/docs* directory.

### 4.2 bbf-ghs

The bbf-ghs module's YANG files are in the *interface* directory. The top level module is in file bbf-ghs.yang, and all included submodules have file names beginning with bbf-ghs. This is the G.handshake (ITU-T G.994.1 [14] YANG data model. G.hs is invoked at start-up by ITU-T standard systems and determines the type of system (e.g., G.fast, VDSL) will initialize on the line.

Documentation is in the *interface/docs* directory.

### 4.3 bbf-fast

The bbf-fast module's YANG files are in the *interface* directory. This is the G.fast YANG data model.

The top level module is in file bbf-fast.yang, and all included submodules have file names beginning with bbf-fast. The individual parameters are defined in \*body.yang submodule files.

Documentation is in the *interface/docs* directory.

bbf-fast is structured according to [TR-371 \[8\]](#), and uses parameters defined in ITU-T G.997.2 [13].

### 4.4 bbf-vdsl

The bbf-vdsl module's YANG files are in the *interface* directory. This is the VDSL YANG data model.

The top level module is in file bbf-vdsl.yang, and all included submodules have file names beginning with bbf-vdsl. The individual parameters are defined in \*body.yang submodule files.

Documentation is in the *interface/docs* directory.

bbf-vdsl is structured according to [TR-252i3 \[7\]](#), further modified to align with bbf-fast. bbf-vdsl uses parameters defined in ITU-T G.997.1 [12].

### 4.5 bbf-selt

The bbf-selt module's YANG files are in the *interface* directory. This is the Single-Ended Line Test (SELT) YANG data model. SELT can test a line using a transceiver, or SELT can be performed by a test head.

The top level module is in file bbf-selt.yang, and all included submodules have file names beginning with bbf-selt. The individual parameters are defined in \*body.yang submodules.

Documentation is in the *interface/docs* directory.

bbf-selt is structured according to [TR-298 \[9\]](#), and uses parameters defined in ITU-T G.996.2 [15].

### 4.6 bbf-melt

The bbf-melt module's YANG files are in the *interface* directory. This is the Metallic Line Test (MELT) YANG data model. MELT performs narrowband tests from a single end of a line.

The top level module is in file `bbf-melt.yang`, and all included submodules have file names beginning with `bbf-melt`. The individual parameters are defined in `*body.yang` submodule files.

Documentation is in the *interface/docs* directory.

`bbf-melt` is structured according to [TR-298 \[9\]](#), and uses parameters defined in ITU-T G.996.2 [15].

## 4.7 bbf-hardware-rpf-dpu

The `bbf-hardware-rpf-dpu` module's YANG files are in the *equipment* directory. This is the RPF YANG data model. RPF provides the means to reverse power equipment such as a DPU.

The top level module is in the file `bbf-hardware-rpf-dpu.yang`, and all included submodules have file names beginning with `bbf-hardware-rpf-dpu`.

Documentation is in the *equipment/docs* directory.

`bbf-hardware-rpf-dpu` uses parameters defined in ITU-T G.997.2[13].

## 5 Documentation

There are “README.md” files; these are short text files giving brief descriptions of the contents of the directories they are in.

Documentation for the bbf-fast module is contained in directory *interface/docs* and has filenames beginning with bbf-fast.

The tree files show the structure of the module. The tree files named bbf-fast.x.tree show the tree structure down to depth “x,” and bbf-fast.tree shows the structure and all parameters in the entire module. Tree files named bbf-fast-xxx.tree show the tree of submodule “xxx.”

Documentation for the bbf-vdsl module is contained in directory *interface/docs* and has filenames beginning with bbf-vdsl.

The tree files here show the structure of the module. Tree files named bbf-vdsl.x.tree show the tree structure down to depth “x,” and bbf-vdsl.tree shows the structure and all parameters in the entire module. Tree files named bbf-vdsl-xxx.tree show the tree of submodule “xxx.”

Additionally file bbf-vop-notes.docx further describes the bbf-vdsl module structure, cross-references with TR-252i3 structure, and contains development notes for the bbf-vdsl module.

Documentation for the bbf-selt module is contained in directory *interface/docs* and has filenames beginning with bbf-selt. The tree files here show the structure of the module. Tree files named bbf-selt.x.tree show the tree structure down to depth “x.”

Documentation for the bbf-melt module is contained in directory *interface/docs* and has filenames beginning with bbf-melt.

The tree files here show the structure of the module. Tree files named bbf-melt.x.tree show the tree structure down to depth “x.”

Documentation for the bbf-hardware-rpf-dpu module is contained in directory *equipment/docs* and has filenames beginning with bbf-hardware-rpf-dpu.

The tree files here show the structure of the module. Tree files named bbf-hardware-rpf-dpu.x.tree show the tree structure down to depth “x.”

## 6 Dependencies on Related YANG modules and Standards

TR-355 is based on YANG 1.1 (RFC 7950 [4]).

The following YANG modules are used by TR-355:

- ietf-interfaces.yang [2]
- ietf-yang-types.yang [3]
- ietf-hardware [5]
- bbm-yang-types [16]



## 7 DPU/PMA Behavior

The requirements in this section only apply to DPUs and PMAs that comply with TR-301 [6].

The following describes the behavior of objects on a DPU with respect to FAST and VDSL configuration and state data objects.

- On initial startup, the DPU MUST instantiate a FastDSL object for each FastDSL-capable port supported by non-removable hardware.
- The DPU MUST NOT instantiate FastDSL objects for ports supported by removable hardware.
- The PMA MUST instantiate FastDSL objects for ports supported by removable hardware.
- The DPU notifies the PMA of the insertion of removable hardware.
- FAST and VDSL configuration objects (associated with the FastDSL object) are configured by the PMA.
- The PMA will configure the FastDSL object for FAST and/or VDSL mode (configuring both modes implicitly means G.hs is used to determine the operational mode).
- If the PMA configures the FastDSL object for a mode not supported by the DPU, the DPU sets the appropriate availability status and either the issue tag "configured-mode-fast-not-supported" or "configured-mode-vdsl-not-supported".
- When the handshake completes with the selection of FAST or VDSL, the corresponding state object will be created (if not yet existing).
- When the technology changes through handshake, the old state object will be deleted and the new one will be created. There will therefore never be more than one state object (and until the first handshake completes there will be none).

Devices are expected to use YANG deviations to announce capabilities, such as the maximum number of supported profiles. Rules and guidelines for this are expected to be defined in future document(s).

## 8 YANG Modules Supported by a DPU

Table 1 specifies the DPU YANG modules to be supported by DPU Model 2:

**Table 1. YANG modules to be supported by a DPU Model 2**

Module reference	Document reference	Support by DPU
bbf-fast	TR-355	REQUIRED for a G.fast DPU
bbf-ghs	TR-355	REQUIRED
bbf-melt	TR-355	OPTIONAL
bbf-selt	TR-355	OPTIONAL
bbf-vdsl	TR-355	REQUIRED for a VDSL2 DPU
bbf-fastdsl	TR-355	REQUIRED
bbf-hardware-rpf-dpu	TR-355	OPTIONAL
ietf-interfaces	RFC 7223	REQUIRED
iana-hardware	RFC 8348	REQUIRED
ietf-hardware	RFC 8348	REQUIRED
ietf-netconf-monitoring	RFC 6022	OPTIONAL
iana-if-type	RFC 7224	REQUIRED
ietf-inet-types	RFC 6021	REQUIRED
ietf-yang-types	RFC 6991	REQUIRED

Table 2 specifies the DPU YANG modules to be supported by a DPU Model 1.

**Table 2. YANG modules to be supported by a DPU Model 1.**

Module reference	Document reference	Support by DPU
bbf-fast	TR-355	REQUIRED for a G.fast DPU
bbf-ghs	TR-355	REQUIRED
bbf-melt	TR-355	OPTIONAL
bbf-selt	TR-355	OPTIONAL
bbf-vdsl	TR-355	REQUIRED for a VDSL2 DPU
bbf-fastdsl	TR-355	REQUIRED
bbf-hardware-rpf-dpu	TR-355	OPTIONAL
ietf-interfaces	RFC 7223	REQUIRED
iana-hardware	RFC 8348	REQUIRED

ietf-hardware	RFC 8348	REQUIRED
ietf-netconf-monitoring	RFC 6022	OPTIONAL
bbf-l2-dhcpv4-relay	TR-383	REQUIRED
bbf-l2-dhcpv4-relay-forwarding	TR-383	REQUIRED
bbf-ldra	TR-383	REQUIRED
bbf-frame-classification	TR-383	REQUIRED
bbf-sub-interfaces	TR-383	REQUIRED
bbf-sub-interface-tagging	TR-383	REQUIRED
bbf-subscriber-profiles	TR-383	REQUIRED
bbf-l2-forwarding	TR-383	REQUIRED
bbf-interfaces-statistics-management	TR-383	REQUIRED
bbf-interfaces-performance-management	TR-383	REQUIRED
bbf-mgmd	TR-383	REQUIRED
bbf-pppoe-intermediate-agent	TR-383	REQUIRED
bbf-qos-*	TR-383	REQUIRED
iana-if-type	RFC 7224	REQUIRED
ietf-inet-types	RFC 6021	REQUIRED
ietf-yang-types	RFC 6991	REQUIRED

End of Broadband Forum Technical Report TR-355a2