

13. Spanning Tree Protocols

The spanning tree algorithms and protocols specified by this standard provide simple and full connectivity throughout a Bridged Local Area Network comprising arbitrarily interconnected bridges. Each bridge can use the Rapid Spanning Tree Protocol (RSTP), Multiple Spanning Tree Protocol (MSTP), or SPB (Shortest Path Bridging) protocols.

NOTE 1—The spanning tree protocols specified by this standard supersede the Spanning Tree Protocol (STP) specified in IEEE Std 802.1D revisions prior to 2004, but facilitate migration by interoperating with the latter without configuration restrictions beyond those previously imposed by STP. However networks that include bridges using STP can reconfigure slowly and constrain active topologies.

NOTE 2—Although the active topologies determined by the spanning tree protocols connect all the components of a Bridged Local Area Network, filtering (MVRP, etc.) can restrict frames to a subset of each active topology.

RSTP assigns all frames to a Common Spanning Tree (CST), without being aware of the active topology assignments made by MSTP or SPB that allow frames to follow separate paths within Multiple Spanning Tree (MST) or Shortest Path Tree (SPT) Regions. Each of these regions comprises MST or SPT Bridges that consistently assign any given frame to the same active topology (see 8.4) and the LANs that interconnect those bridges. These regions and other bridges and LANs are connected into the CST, to provide loop free network wide connectivity even if active topology assignments or spanning tree protocols differ locally.

MSTP and SPB connect all bridges and LANs with a single Common and Internal Spanning Tree (CIST) that supports the automatic determination of each region, choosing its maximum possible extent. The connectivity calculated for the CIST provides the CST for interconnecting the regions, and an Internal Spanning Tree (IST) within each region. MSTP calculates a number of independent Multiple Spanning Tree Instances (MSTIs) within each region, and ensures that frames with a given VID are assigned to one and only one of the MSTIs or the IST within the region (or reserved for use by SPB or PBB-TE), that the assignment is consistent among all bridges within the region, and that the stable connectivity of each MSTI and the IST at the boundary of the region matches that of the CST. SPB calculates symmetric sets of Shortest Path Trees (SPTs), each rooted at a bridge within a region, and ensures that frames for any given VLAN are assigned to the same symmetric SPT set within the region (or to the IST, an MSTI, or PBB-TE). Within an SPT Region, each shortest path bridged frame is assigned to the SPT rooted at the bridge providing ingress to the region for that frame, either by replacing the frame's Base VID (3.1) with one of a number of Shortest Path VIDs (SPVIDs) that support its VLAN within the region, or (when its VLAN is supported by shortest path backbone bridging) by using the frame's source address in conjunction with the Base VID. SPB protocols can dynamically allocate SPVIDs and ensure that their allocation is consistent within a region.

Spanning tree protocol entities transmit and receive BPDUs (Clause 14) to convey parameters used by RSTP and MSTP to calculate CST, CIST, and MSTI spanning trees. BPDUs also convey parameters that all the spanning tree protocols use to interoperate with each other, that determine the extent of MST and SPT Regions, and that ensure that temporary loops are not created when neighbouring bridges are acting on different topology information. SPB uses ISIS-SPB (see Clause 29) to share information used to calculate the IST and SPTs, and to perform that calculation, and BPDUs (13.17) to ensure loop-free connectivity.

This clause

- a) Specifies protocol design and support requirements (13.1, 13.2) and design goals (13.3).
- b) Provides an overview of RSTP (13.4), MSTP (13.5), SPB and SPBB (13.6) operation.
- c) Describes how the spanning tree protocols interoperate and coexist (13.7)
- d) Specifies how spanning tree priority vectors (13.9) are calculated (13.10, 13.11) and used to assign the Port Roles (13.12) that determine the Port States, i.e. forwarding and learning (8.4), for each tree.
- e) Shows that RSTP, MSTP, and the SPB protocols provide stable connectivity (13.13).
- f) Describes how spanning tree priority vectors are communicated (13.14) and changed (13.15).
- g) Describes how Port Role are used to change Port States without introducing loops (13.16, 13.17).

- h) Recommends defaults and ranges for the parameters that determine each tree's topology (13.18).
- i) Describes the updating of learned station location information when a tree reconfigures (13.19).
- j) Specifies additional controls that can speed reconfiguration or prevent unwanted outcomes (13.20).
- k) Describes how loops are prevented when a LAN is only providing one-way connectivity (13.21), and can be prevented when the network includes bridges whose protocol operation can fail (13.23).
- l) Describes how a bridge's protocol processing can be 'hot upgraded' in an active network (13.22).
- m) Specifies RSTP, MSTP, and support for SPB using state machines (13.24–13.40).
- n) Specifies the use and configuration of the spanning tree protocols for the special cases of a Provider Edge Bridge's Customer Edge Ports (13.41), a Backbone Edge Bridge's Virtual Instance Ports (13.42), and an L2 Gateway Port connecting a customer to a provider (13.43).

NOTE 3—Readers of this specification are urged to begin by familiarizing themselves with RSTP.

Clause 14 specifies the format of BPDUs. Clause 27 describes the uses of Shortest Path Bridging. Clause 29 specifies ISIS-SPB. The text of this clause (Clause 13) takes precedence should any conflict be apparent between it and the text in other parts of this standard (in particular, Clause 12, Clause 14, and Annex A).

13.1 Protocol design requirements

The Spanning Tree Algorithm and its associated protocols operate in Bridged Local Area Networks of arbitrary physical topology comprising SPT, MST, RST, or STP Bridges connecting shared media or point-to-point LANs, so as to support, preserve, and maintain the quality of the MAC Service in all its aspects as specified by Clause 6.

RSTP configures the Port State (7.4) of each Bridge Port. MSTP configures the Port State for the CIST and each MSTI, and verifies the allocation of VIDs to FIDs and FIDs to trees. SPB protocols configure the Port State for the CIST and each SPT, configure the VID Translation Table for each Bridge Port, allocate FIDs to SPT sets, and assigns frames to SPTs by SPVIDs and/or source address. Operating both independently and together RSTP, MSTP, and SPB protocols meet the following requirements:

- a) They configure one or more active topologies that fully connect all physically connected LANs and bridges, and stabilize (with high probability) within a short, known bounded interval after any change in the physical topology, maximising service availability (6.5.1).
- b) The active topology for any given frame remains simply connected at all times (6.5.3, 6.5.4), and will (with high probability) continue to provide simple and full connectivity for frames even in the presence of administrative errors (e.g. in the allocation of VLANs to MSTIs).
- c) The configured stable active topologies are unicast multicast congruent, downstream congruent, and reverse path congruent (symmetric) (3.2, 6.3).
- d) The same symmetric active topology is used, in a stable network, for all frames using the same FID, i.e. between any two LANs all such frames are forwarded through the same Bridge Ports (6.3).
- e) The active topology for a given VLAN can be chosen by the network administrator to be a common spanning tree, one of multiple spanning trees (if MSTP is implemented), or shortest path (if SPB protocols are implemented).
- f) Each active topology is predictable, reproducible, and manageable, allowing Configuration Management (following traffic analysis) to meet Performance Management goals (6.3 and 6.3.10).
- g) The configured network can support VLAN-unaware end stations, such that they are unaware of their attachment to a single LAN or a Bridged Local Area Network, or their use of a VLAN (6.2).
- h) The communications bandwidth on any particular LAN is always a small fraction of the total available bandwidth (6.5.10).

NOTE—The spanning tree protocols cannot protect against temporary loops caused by the interconnection of LANs by devices other than bridges (e.g., LAN repeaters) that operate invisibly with respect to support of the MAC Internal Sublayer Service and the MAC_Operational status parameter (6.6.2).

13.2 Protocol support requirements

In order for the spanning tree protocols to operate, the following are required:

- a) A unique Group MAC Address used by the Spanning Tree Protocol Entities (8.10) of participating bridges or bridge components (5.2), and recognized by all the bridges attached to a LAN.
- b) An identifier for each bridge or bridge component, unique within the Bridged Local Area Network.
- c) An identifier for each Bridge Port, unique within a bridge or bridge component.

Values for each of these parameters shall be provided by each bridge. The unique MAC Address that identifies the Spanning Tree Protocol Entities of MAC Bridges, VLAN Bridges (5.9), and C-VLAN components (5.5) is the Bridge Group Address (Table 8-1). The unique MAC Address that identifies the Spanning Tree Protocol Entities of S-VLAN components is the Provider Bridge Group Address (Table 8-2).

To allow management of active topology (for RSTP, MSTP, or SPB) means of assigning values to the following are required:

- d) The relative Bridge Priority of each bridge in the network.
- e) A Port Path Cost for each Bridge Port.
- f) The relative Port Priority of each Bridge Port.

13.2.1 MSTP support requirements

MSTP does not require any additional configuration, provided that communication between end stations is supported by a number of VLANs. However, to realize the improved throughput and associated frame loss and transit delay performance improvements made possible by the use of multiple spanning trees, the following are required:

- a) Assessment of the probable distribution of traffic between VLANs and between sets of communicating end stations using those VLANs.
- b) Per MSTI assignment of Bridge Priority and Internal Port Path Costs to configure the MSTIs.
- c) Consistent assignment of VIDs to MSTIDs within each potential MST Region.
- d) Administrative agreement on the Configuration Name and Revision Level used to represent the assignments of VIDs to MSTIDs.

13.2.2 SPB support requirements

SPB protocols can provide both common spanning tree and shortest path support for VLANs without further configuration (except as required for ISIS-SPB). To support such operation this standard specifies:

- a) A Configuration Name and Revision Level used to represent the assignment of VLAN 1 to the SPT Primary Set, VLAN 2 to the SPT Alternate Set, and all other VIDs to the CIST.

Use of Shortest Path Backbone Bridging (SPBB) requires the following:

- b) Explicit identification of each VLAN to be shortest path backbone bridged.

13.3 Protocol design goals

All the spanning tree protocols meet the following goal, which simplifies operational practice:

- a) Bridges do not have to be individually configured before being added to the network, other than having their MAC Addresses assigned through normal procedures.

- 1 b) In normal operation, the time taken to configure the active topology of a network comprising point-
2 to-point LANs is independent of the timer values of the protocol.
3

4 RSTP and MSTP meet the following goal, which limits the complexity of bridges and their configuration:
5

- 6 c) The memory requirements associated with each Bridge Port are independent of the number of
7 bridges and LANs in the network.
8

9 It is highly desirable that the operation of SPB protocols support updating of the SPB configuration, so that:
10

- 11 d) SPT Bridges can be added to a region without disrupting communication for existing VLANs.
12 e) Additional VLANs can be supported by SPB without disrupting communication for the VLANs that
13 are already supported by SPB, or for those VLANs that supported by RSTP or MSTP.
14 f) Shortest path bridging support can be enabled or disabled for individual VLANs that are being used
15 to support user communication, with the minimum of frame loss on those VLANs.
16
17

18 **13.4 RSTP overview** 19

20 The Rapid Spanning Tree Protocol (RSTP) configures the Port State (3.5, 8.4) of each Bridge Port in the
21 Bridge Local Area Network. RSTP ensures that the stable connectivity provided by each bridge between its
22 ports and by the individual LANs attached to those ports is predictable, manageable, full, simple, and
23 symmetric. RSTP further ensures that temporary loops in the active topology do not occur if the network has
24 to reconfigure in response to the failure, removal, or addition of a network component, and that erroneous
25 station location information is removed from the Filtering Database after reconfiguration.
26

27 Each of the bridges in the network transmits Configuration Messages (13.14). Each message contains
28 spanning tree priority vector (13.9) information that identifies one bridge as the Root Bridge of the network,
29 and allows each bridge to compute its own lowest path cost to that Root Bridge before transmitting its own
30 Configuration Messages. A Port Role (13.12) of Root Port is assigned to the one port on each bridge that
31 provides that lowest cost path to the Root Bridge, and a Port Role of Designated Port to the one Bridge Port
32 that provides the lowest cost path from the attached LAN to the Root Bridge. Alternate Port and Backup Port
33 roles are assigned to Bridge Ports that can provide connectivity if other network components fail.
34
35

36 State machines associated with the Port Roles maintain and change the Port States that control forwarding
37 (8.6) and learning (8.7) of frames. In a stable network, Root Ports and Designated Ports are Forwarding,
38 while Alternate, Backup, and Disabled Ports are Discarding. Each Port's role can change if a Bridge, Bridge
39 Port, or LAN fails, is added to, or removed from network. Port state transitions to Learning and Forwarding
40 are delayed, and ports can temporarily transition to the Discarding state prevent loops and to ensure that
41 misordering (6.5.3) and duplication (6.5.4) rates remain negligible.
42

43 RSTP provides rapid recovery of connectivity to minimize frame loss (6.5.2). A new Root Port, and
44 Designated Ports attached to point-to-point LANs, can transition to Forwarding without waiting for protocol
45 timers to expire. A Root Port can transition to Forwarding without transmitting or receiving messages from
46 other bridges, while a Designated Port attached to a point-to-point LAN can transition when it receives an
47 explicit agreement transmitted by the other bridge attached to that LAN. The forwarding transition delay
48 used by a Designated Port attached to a shared media LAN is long enough for other bridges attached to that
49 LAN to receive and act on transmitted messages, but is independent of the overall network size. If all the
50 LANs in a network are point-to-point, RSTP timers define worst-case delays that only occur if protocol
51 messages are lost or rate transmission limits are exceeded.
52

53 A Bridge Port attached to a LAN that has no other bridges attached to it may be administratively configured
54 as an Edge Port. RSTP monitors the LAN to ensure that no other bridges are connected, and may be

1 configured to automatically detect an Edge Port. Each Edge Port transitions directly to the Forwarding Port
2 State, since there is no possibility of it participating in a loop.
3

4 **13.4.1 Computation of the active topology**

5

6 The bridge with the best Bridge Identifier is selected as the Root Bridge. The unique Bridge Identifier for
7 each bridge is derived, in part, from the Bridge Address (8.13.8) and, in part, from a manageable priority
8 component (13.26). The relative priority of bridges is determined by the numerical comparison of the unique
9 identifiers, with the lower numerical value indicating the better identifier.
10

11 Every bridge has a Root Path Cost associated with it. For the Root Bridge this is zero. For all other bridges,
12 it is the sum of the Port Path Costs on the least cost path to the Root Bridge. Each port's Path Cost may be
13 managed, 13.18 recommends default values for ports attached to LANs of various speeds.
14

15 The Bridge Port on each bridge with the lowest Root Path Cost is assigned the role of Root Port for that
16 bridge (the Root Bridge does not have a Root Port). If a bridge has two or more ports with the same Root
17 Path Cost, then the port with the best Port Identifier is selected as the Root Port. Part of the Port Identifier is
18 fixed and different for each port on a bridge, and part is a manageable priority component (13.26). The
19 relative priority of Bridge Ports is determined by the numerical comparison of the unique identifiers, with
20 the lower numerical value indicating the better identifier.
21


22 Each LAN in the Bridged Local Area Network also has an associated Root Path Cost. This is the Root Path
23 Cost of the lowest cost bridge with a Bridge Port connected to that LAN. This bridge is selected as the
24 Designated Bridge for that LAN. If there are two or more bridges with the same Root Path Cost, then the
25 bridge with the best priority (least numerical value) is selected as the Designated Bridge. The Bridge Port on
26 the Designated Bridge that is connected to the LAN is assigned the role of Designated Port for that LAN. If
27 the Designated Bridge has two or more ports connected to the LAN, then the Bridge Port with the best
28 priority Port Identifier (least numerical value) is selected as the Designated Port.
29

30 In a Bridged Local Area Network whose physical topology is stable, i.e RSTP has communicated consistent
31 information throughout the network, every LAN has one and only one Designated Port, and every bridge
32 with the exception of the Root Bridge has a single Root Port connected to a LAN. Since each bridge
33 provides connectivity between its Root Port and its Designated Ports, the resulting active topology connects
34 all LANs (is "spanning") and will be loop free (is a "tree").
35


36 Any Bridge Port that is enabled, but not a Root or Designated Port, is a Backup Port if that bridge is the
37 Designated Bridge for the attached LAN, and an Alternate Port otherwise. An Alternate Port offers an
38 alternate path in the direction of the Root Bridge to that provided by the bridge's own Root Port, whereas a
39 Backup Port acts as a backup for the path provided by a Designated Port in the direction of the leaves of the
40 Spanning Tree. Backup Ports exist only where there are two or more connections from a given bridge to a
41 given LAN; hence, they (and the Designated Ports that they back up) can only exist where the bridge has
42 two or more ports attached to a shared media LAN, or directly connected by a point-to-point LAN.
43
44
45
46
47
48
49
50
51
52
53
54

13.4.2 Example topologies


The spanning tree examples in this clause use the conventions of Figure 13-1.

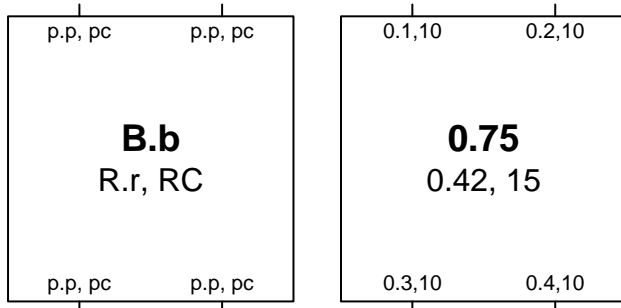

A template for and example of an STP Bridge. **B.b** is the Bridge Identifier (including the manageable priority component **B**). **R.r** and **RC** are the Root Identifier, Root Path Cost, and the Designated Bridge Identifier, for the Root Port. **p.p, pc** are the Port Identifier (with manageable priority **p**.) and the Port Path Cost for a Bridge Port.

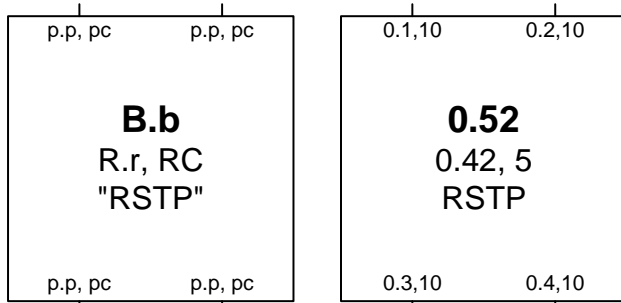

A template for and example of an RSTP Bridge.

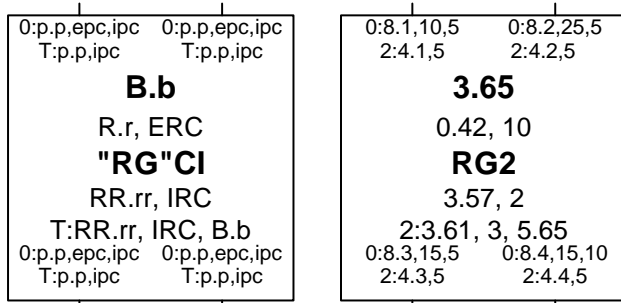

A template for and an example of an MSTP Bridge. **B.b** is the CIST Bridge Identifier. **R.r, ERC, RR.rr** are the CIST Root Identifier, External Root Path Cost, and Regional Root Identifier. **CI** identifies the Configuration Identifier for the Bridge. **RR.rr, IRC** the CIST Regional Root Identifier and the Internal Root Path Cost. **T:RR.rr, IRC, B.b**, is the Regional Root Identifier, Internal Root Path Cost IRC, and Bridge Identifier for the MSTI with MSTID **T**. **-p.p, epc, ipc** are the CIST Port Identifier, External Port Path Cost, and Internal Port Path Cost for a Bridge Port. **T:p.p, ipc** are the Port Identifiers and their Regional Costs for MSTI **T**. Any of the above information may be selectively omitted if deemed irrelevant for the purposes of a diagram.



A LAN


Connections between Bridges and LANs indicate the Port Role and Port State by means of their end point symbols, and in some examples, may show the transmission of BPDUs from a Port onto a LAN by means of arrowheads, as shown in the following table.

Port Role	Port State	Legend
Designated	Discarding	●+——
	Learning	●+——
& operEdge	Forwarding	●+——
	Forwarding	●+——
Root Port or Master Port	Discarding	○+——
	Learning	○+——
Alternate	Discarding	+——
	Learning	+——
Backup	Discarding	+——
	Learning	+——
Disabled	Discarding	+——
	Forwarding	+——
Transmitted Bpdus		
Designated		——>
Designated Proposal		——>>
Root		——>>
Root Agreement		——>>

NOTE—These diagrammatic conventions allow the representation of Alternate and Backup Ports that are in Learning or Forwarding states; this can happen as a transitory condition due to implementation-dependent delays in switching off Learning and/or Forwarding on a Port that changes role from Designated or Root to Alternate or Backup.


Figure 13-1—Diagrammatic conventions for spanning tree topologies

1 Figure 13-2 shows a simple, redundantly connected, structured wiring configuration, with bridges connected
 2 by point-to-point LANs A through N, and a possible spanning tree active topology of the same network.
 3 bridge 111 has been selected as the Root (though one cannot tell simply by looking at the active topology
 4 which bridge is the Root).

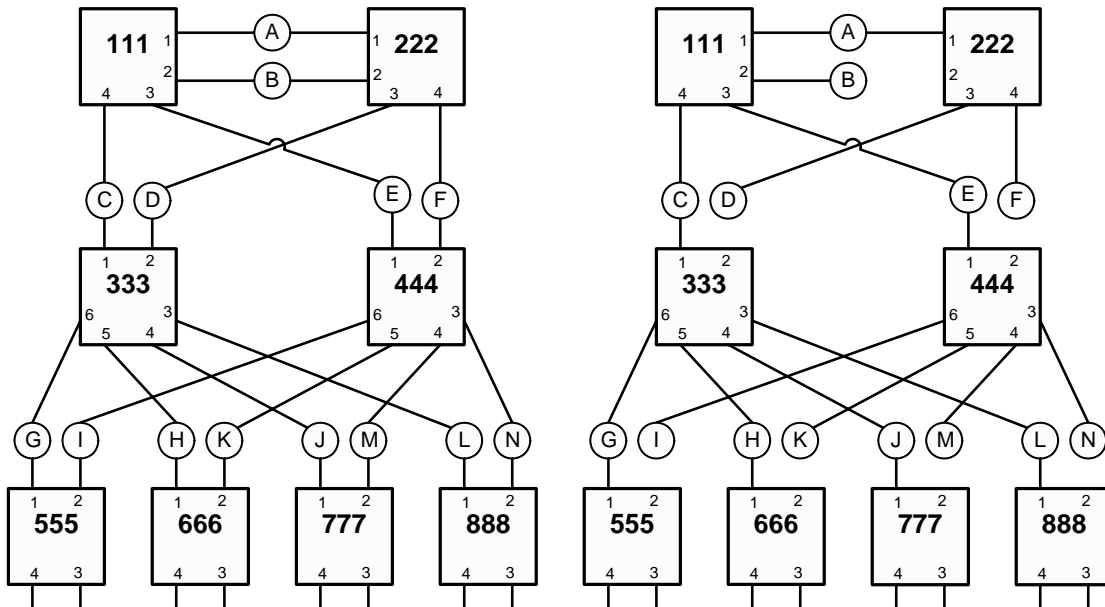

25 **Figure 13-2—Physical topology and active topology**

27 Figure 13-3 shows the Port Roles and Port States of each Bridge Port. It can be seen that bridge 111 is the
 28 Root, as its Ports are all Designated Ports, each of the remaining bridges have one Root Port.
 29

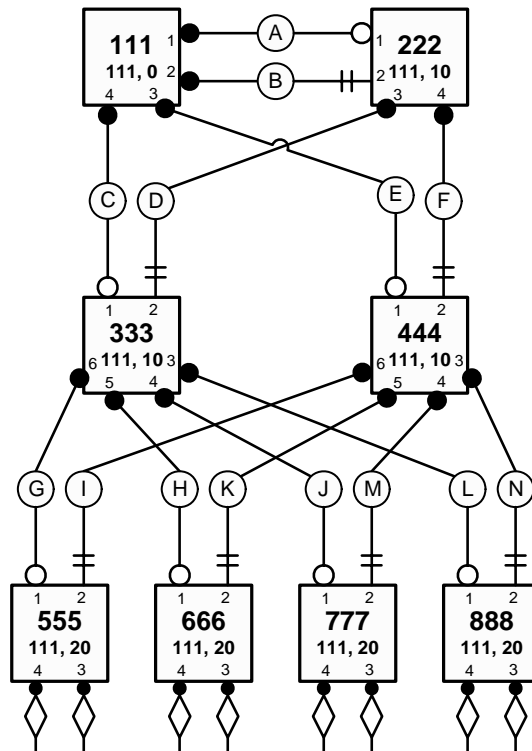

53 **Figure 13-3—Port Roles and Port States**

Figure 13-4 shows the result of connecting two of the ports of bridge 888 to the same LAN. As port 4 of bridge 888 has worse priority than port 3 and both offer the same Root Path Cost, port 4 will be assigned the Backup Port Role and will therefore be in the Discarding Port State. Should port 3 or its connection to LAN O fail, port 4 will be assigned the Designated Port Role and will transition to the Forwarding Port State.

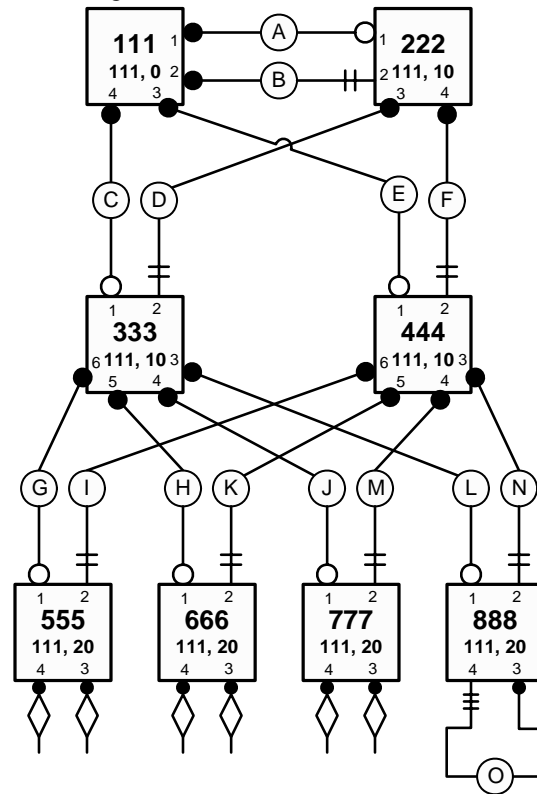


Figure 13-4—A Backup Port

Figure 13-5 shows a “ring” topology constructed from point-to-point links, as in some resilient backbone configurations. Bridge 111 is the Root, as in previous examples.

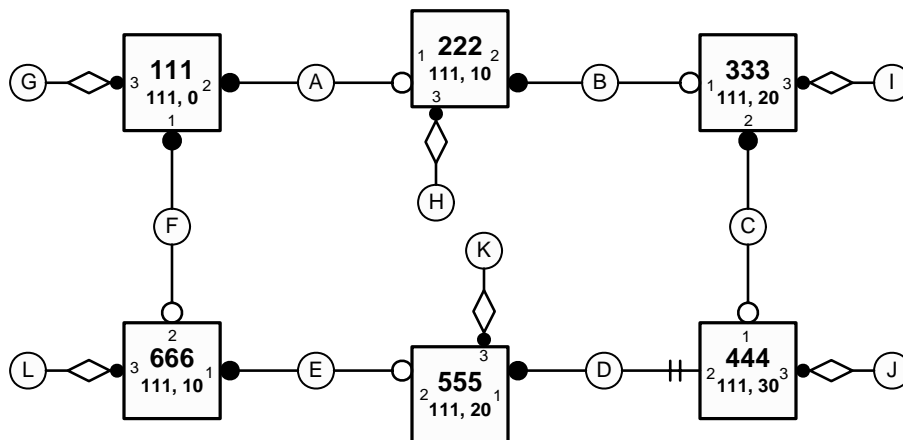


Figure 13-5—“Ring Backbone” example

13.5 MSTP overview

The Multiple Spanning Tree Protocol specifies:

- a) An MST Configuration Identifier (13.8) that allows each bridge to advertise its assignment, to a specified MSTI or to the IST, of frames with any given VID.
- b) A priority vector (13.9) that comprises bridge identifier and path cost information for constructing a deterministic and manageable single spanning tree active topology, the CIST, that:
 - 1) Fully and simply connects all bridges and LANs in a Bridged Local Area Network.
 - 2) Permits the construction and identification of MST Regions of bridges and LANs that are guaranteed fully connected by the bridges and LANs within each region.
 - 3) Ensures that paths within each MST Region are always preferred to paths outside the region.
- c) An MSTI priority vector (13.9), comprising information for constructing a deterministic and independently manageable active topology for any given MSTI within each region.
- d) Comparisons and calculations performed by each bridge in support of the distributed spanning tree algorithm (13.10). These select a CIST priority vector for each Bridge Port, based on the priority vectors and MST Configuration Identifiers received from other bridges and on an incremental Path Cost associated with each receiving port. The resulting priority vectors are such that in a stable network:
 - 1) One bridge is selected to be the CIST Root of the Bridged Local Area Network as a whole.
 - 2) A minimum cost path to the CIST Root is selected for each bridge and LAN, thus preventing loops while ensuring full connectivity.
 - 3) The one bridge in each MST Region whose minimum cost path to the Root is not through another bridge using the same MST Configuration Identifier is identified as its region's CIST Regional Root.
 - 4) Conversely, each bridge whose minimum cost path to the Root is through a bridge using the same MST Configuration Identifier is identified as being in the same region as that bridge.
- e) Priority vector comparisons and calculations performed by each bridge for each MSTI (13.11). In a stable network:
 - 1) One bridge is independently selected for each MSTI to be the MSTI Regional Root.
 - 2) A minimum cost path to the MSTI Regional Root that lies wholly within the region is selected for each bridge and LAN.
- f) CIST Port Roles (13.12) that identify the role in the CIST active topology played by each port on a bridge.
 - 1) The Root Port provides the minimum cost path from the bridge to the CIST Root (if the bridge is not the CIST Root) through the Regional Root (if the bridge is not a Regional Root).
 - 2) A Designated Port provides the least cost path from the attached LAN through the bridge to the CIST Root.
 - 3) Alternate or Backup Ports provide connectivity if other bridges, Bridge Ports, or LANs fail or are removed.
- g) MSTI and SPT Port Roles (13.12) that identify the role played by each port on a bridge for each MSTI's or SPT's active topology within and at the boundaries of a region.
 - 1) The Root Port provides the minimum cost path from the bridge to the Regional Root (if the bridge is not the Regional Root for the tree).
 - 2) A Designated Port provides the least cost path from the attached LAN through the bridge to the Regional Root.
 - 3) A Master Port provides connectivity from the region to a CIST Root that lies outside the region. The Bridge Port that is the CIST Root Port for the CIST Regional Root is the Master Port for all MSTIs and SPTs.
 - 4) Alternate or Backup Ports provide connectivity if other bridges, Bridge Ports, or LANs fail or are removed.
- h) State machines and state variables associated with each spanning tree (CIST, MSTI, or SPT), port, and port role, to select and change the Port State (8.4, 13.24) that controls the processing and forwarding of frames assigned to that tree by a MAC Relay Entity (8.3).

13.5.1 Example topologies

Figure 13-6 is an example Bridged Local Area Network, using the conventions of Figure 13-1, and chosen to illustrate MSTP calculations rather than as an example of a common or desirable physical topology.

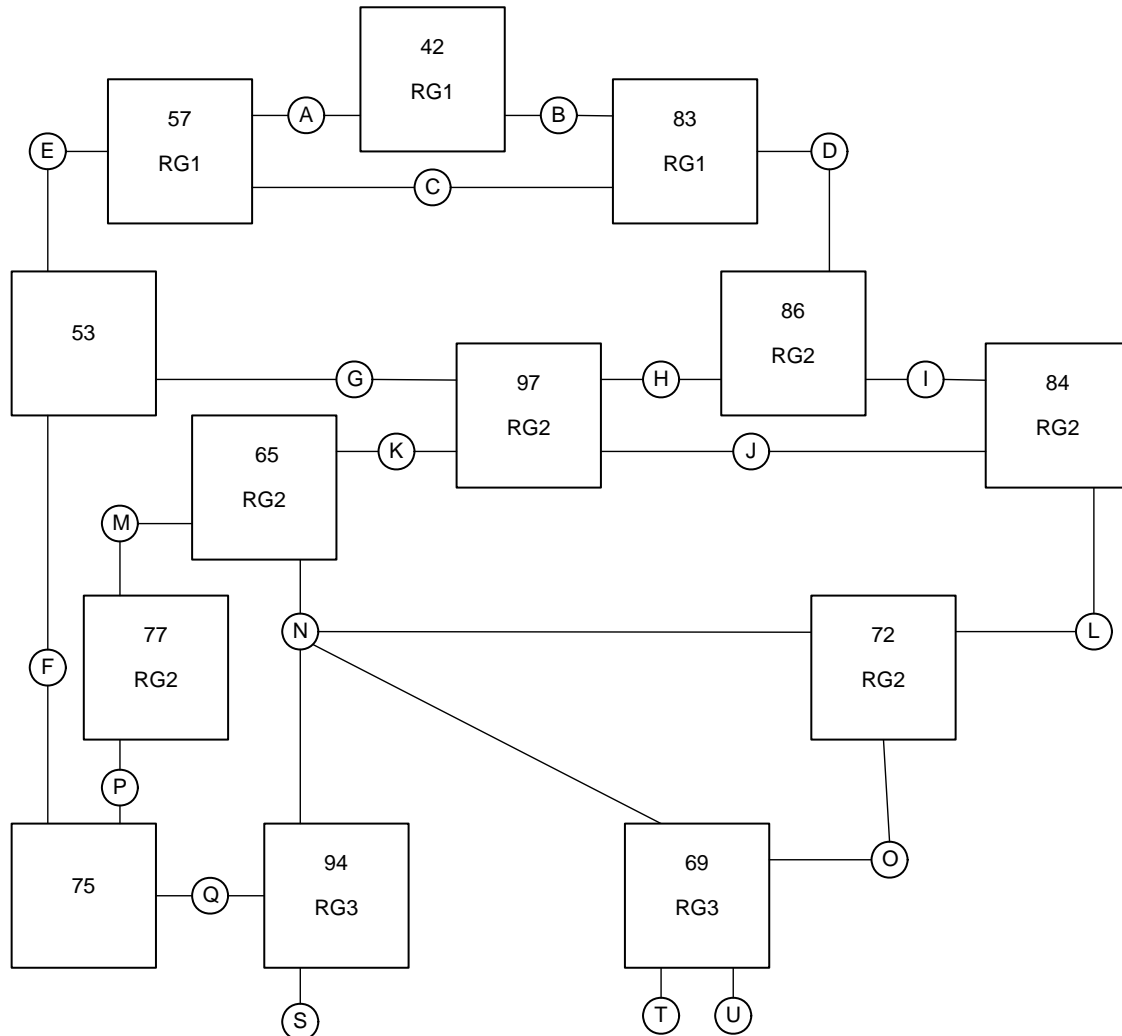


Figure 13-6—An MST Bridge network

Figure 13-8 is the same network showing bridges and LANs with better CIST spanning tree priorities higher on the page, and including CIST priority vectors, port roles, and MST Regions. In this example:

- a) Bridge 0.42 is the CIST Root because it has the best (numerically lowest) Bridge Identifier.
- b) Bridges 0.57 and 2.83 are in the same MST Region (1) as 0.42, because they have the same MST Configuration Identifier as the latter. Because they are in the same MST Region as the CIST Root, their External Root Path Cost is 0, and their CIST Regional Root is the CIST Root.
- c) LANs A, B, C, and D are in Region 1 because their CIST Designated Bridge is a Region 1 MST Bridge, and no STP bridges are attached to those LANs. LAN E is not in an MST Region (or in its own region—an equivalent view) because it is attached to bridge 0.53, which is not an MST Bridge.
- d) Bridges 0.77, 0.65, 0.97, 0.86, 3.84, and 3.72 are in the same MST Region (2) since they have the same MST Configuration Identifier and are interconnected by LANs for which one of them is the CIST Designated Bridge.

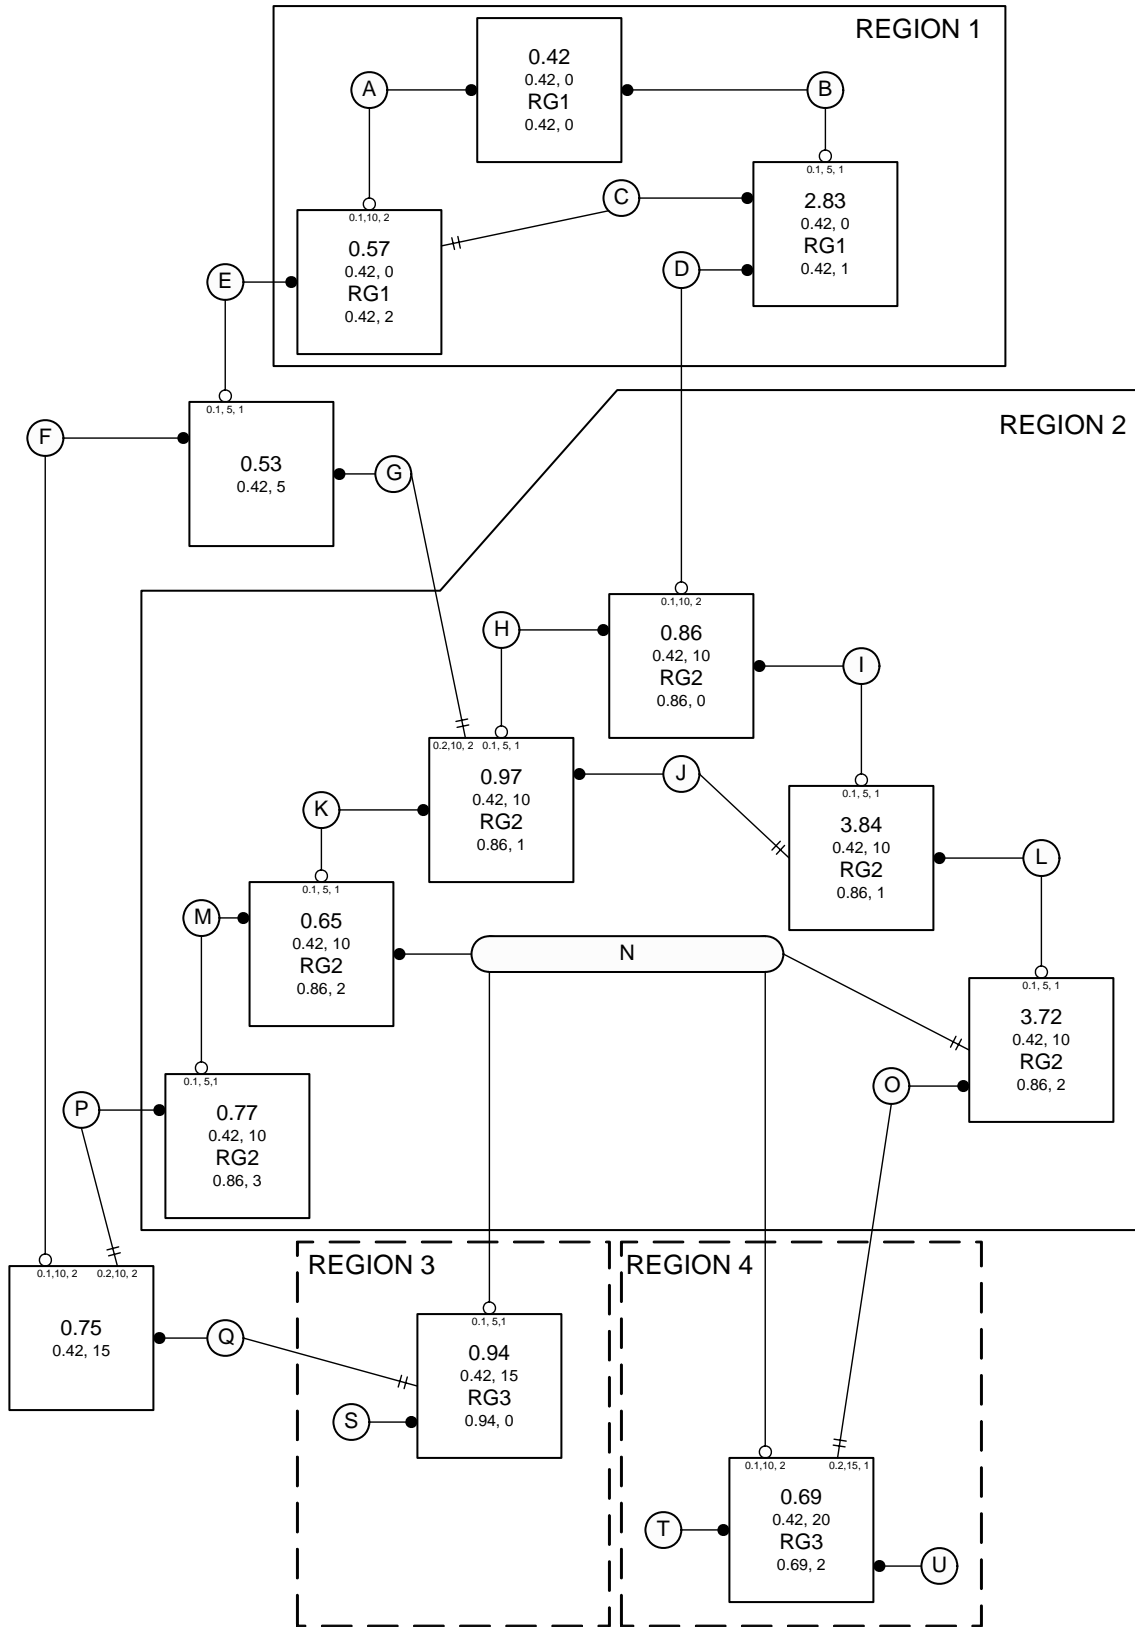


Figure 13-7—CIST Priority Vectors, Port Roles, and MST Regions

- e) Bridge 0.86 is the CIST Regional Root for Region 2 because it has the lowest External Root Path Cost through a Boundary Port.
- f) LAN N is in Region 2 because its CIST Designated Bridge is in Region 2. Frames assigned to different MSTIDs may reach N from bridge 0.86 (for example) by either bridge 0.65 or bridge 3.72, even though bridges 0.94 and 0.69 with MST Configuration Identifiers that differ from those for bridges in Region 2 are attached to this shared LAN.
- g) Bridges 0.94 and 0.69 are in different regions, even though they have the same MST Configuration Identifier, because the LAN that connects them (N) is in a different region.

Figure 13-8 shows a possible active topology of MSTI 2 within Region 2.

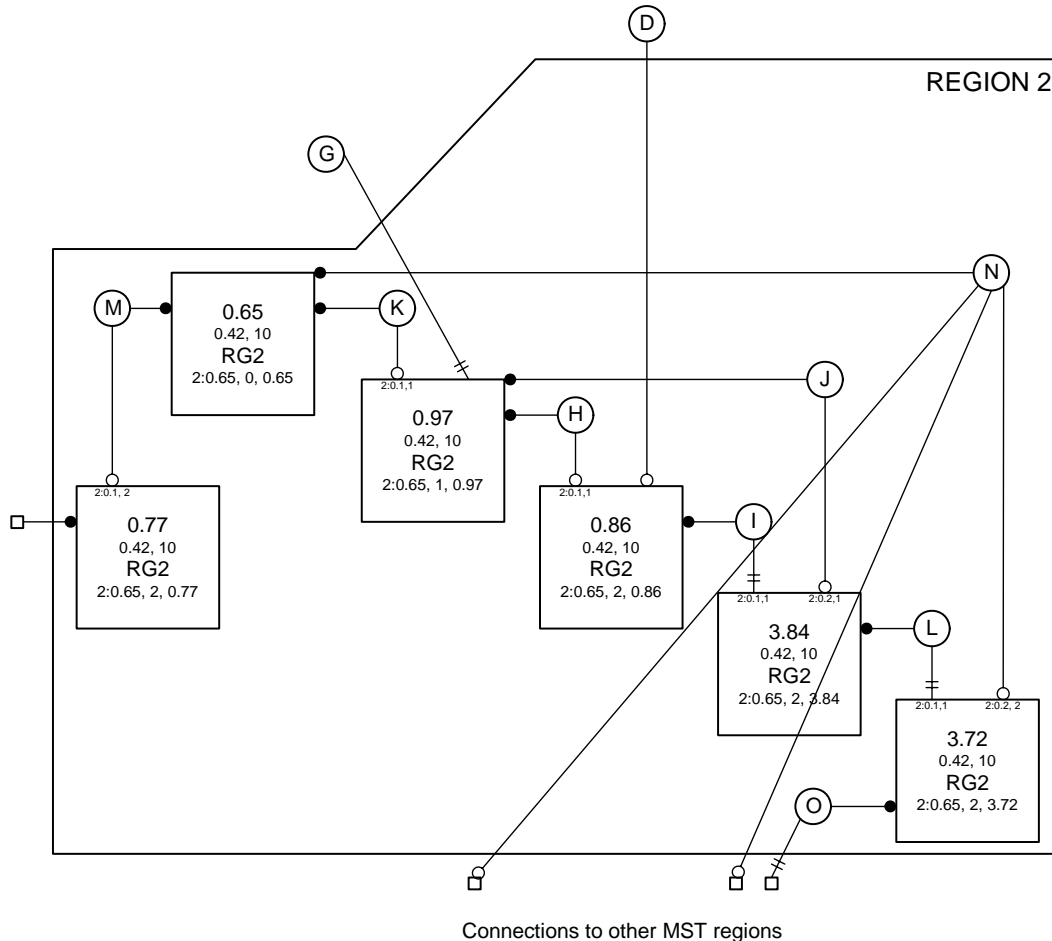


Figure 13-8—MSTI Active Topology in Region 2

- h) Bridge 0.65 has been chosen as the MSTI Regional Root because it has the best (numerically the lowest) Bridge Identifier of all bridges in the region for this MSTI.
- i) The connectivity between the whole of Region 2 and Region 1 is provided through a single Bridge Port, the Master Port on bridge 0.86. This port was selected for this role because it is the CIST Root Port on the CIST Regional Root for the region (see Figure 13-6).
- j) The connectivity between the whole of Region 2 and LANs and bridges outside the region for the MSTI is the same as that for the CIST. This connectivity is similar to that which might result by replacing the entire region by a single SST Bridge. The region has a single Root Port (this port is the Master Port for each MSTI) and a number of Designated Ports.

13.5.2 Relationship of MSTP to RSTP

MSTP is based on RSTP, extended so frames for different VLANs can follow different trees within regions.

- a) The same fundamental spanning tree algorithm selects the CIST Root Bridge and Port Roles, but extended priority vector components are used within (13.9, 13.10) in each region. As a result each region resembles a single bridge from the point of view of the CST as calculated by RSTP.
- b) Each MSTI's Regional Root Bridge and Port Roles are also computed using the same fundamental spanning tree algorithm with modified priority vector components (13.11).
- c) Different bridges may be selected as the Regional Root for different MSTIs by modifying the manageable priority component of the Bridge Identifier differently for the MSTIs.
- d) MST Configuration Identification is specific to MSTP.
- e) The Port Roles used by the CIST (Root, Designated, Alternate, Backup or Disabled Port) are the same as those of RSTP. The MSTIs use the additional port role Master Port. The Port States associated with each spanning tree and bridge port are the same as those of RSTP.
- f) The state variables for each Bridge Port for each tree and for the bridge itself are those specified for RSTP as per bridge port and per bridge with a few exceptions, additions, and enhancements.
- g) The performance parameters specified for RSTP apply to the CIST, with a few exceptions, additions, and enhancements. A simplified set of performance parameters apply to the MSTIs.
- h) This standard specifies RSTP state machines and procedures as a subset of MSTP.

13.5.3 Modeling an MST or SPT Region as a single bridge

The nominal replacement of an entire region by a single RSTP Bridge leads to little impact on the remainder of the Bridged Local Area Network. This design is intended to assist those familiar with RSTP to comprehend and verify MSTP, and to administer networks using MSTP. Treating the MST Regions as single bridges provides the network administrator with a natural hierarchy. The internal management of MST Regions can be largely separated from the management of the active topology of the network as a whole.

The portion of the active topology of the network that connects any two bridges in the same MST Region traverses only MST Bridges and LANs in that region and never bridges of any kind outside the region; in other words, connectivity within the region is independent of external connectivity. This is because the protocol parameters that determine the active topology of the network as a whole, the Root Identifier and Root Path Cost (known in the MSTP specification as the CIST Root Identifier and CIST External Root Path Cost) are carried unchanged throughout and across the MST Region, so bridges within the region will always prefer spanning tree information that has been propagated within the region to information that has exited the region and is attempting to re-enter it.

NOTE 1—No LAN can be in more than one MST Region at a time, so two bridges (0.11 and 0.22 say) that would otherwise be in the same region by virtue of having the same MST Configuration and of being directly connected by a LAN, may be in distinct regions if that is a shared LAN with other bridges attached (having a different MST Configuration) and no other connectivity between 0.11 and 0.22 and lying wholly within their region is available. The region that the shared LAN belongs to may be dynamically determined. No such dynamic partitioning concerns arise with single bridges. Obviously the sharing of LANs between administrative regions militates against the partitioning of concerns and should only be done following careful analysis.

The Port Path Cost (MSTP's External Port Path Cost) is added to the Root Path Cost just once at the Root Port of the CIST Regional Root, the closest bridge in the region to the Root Bridge of the entire network. The Message Age used by STP and RSTP is also only incremented at this port. If the CIST Root is within a region, it also acts as the Regional Root, and the Root Path Cost and Message Age advertised are zero, just as for a single bridge.

Within an MST Region, each MSTI operates in much the same way as an independent instance of RSTP with dedicated Regional Root Identifier, Internal Root Path Cost, and Internal Port Path Cost parameters.

1 Moreover, the overall spanning tree (the CIST) includes a fragment (the IST) within each MST Region that
2 can be viewed as operating in the same way as an MSTI with the Regional Root as its root.
3

4 NOTE 2—Since an MST Region behaves like a single bridge and does not partition (except in the unusual configuration
5 involving shared LANs noted above), it has a single Root Port in the CST active topology. Partitioning a network into
6 two or more regions can therefore force non-optimal blocking of Bridge Ports at the boundaries of those regions.
7

9 **13.6 SPB overview**

10 *Clause 27* provides a comprehensive overview of SPB and SPBB operation. This clause (13.6) summarizes
11 aspects of SPB operation that relate to the transmission and reception of BPDUs, and their role in providing
12 interoperability with RSTP and MSTP, and in carrying the agreements that ensure that each Shortest Path
13 Tree (SPT) provides loop-free connectivity throughout an SPT Region. The details of agreements are
14 considered in 13.17, the assignment of frames to SPTs in 8.4 and *Clause 27*, and protocols and procedures to
15 allow plug-and-play generation of SPVIDs in *Clause 27*.
16
17

18 Considerations of backward and forward compatibility and interoperability figure largely in this clause
19 (Clause 13) and to some extent these consideration revolve around the notion of MST or SPT Region, with
20 each region capable of using different protocols or different configurations. These considerations should not
21 be allowed to obscure the fact that the ideal network configuration (from the point of view of connectivity
22 and bandwidth efficiency) comprises a single region, or possibly one core region with RSTP bridges
23 attached, and that separate regions are most likely to arise when continued connectivity is being provided by
24 the CST as configuration changes are made to bridges in the network. If an SPT Region is bounded by
25 Backbone Edge Bridges or LAN with no other bridges attached, B-VLANs can be supported by SPBB, with
26 frames assigned to SPTs using their source address, while other B-VLANs and S-VLANs can be supported
27 by SPB, with frames assigned to each SPT by SPVID. In both cases, however, SPTs are calculated in the
28 same way and the effects on this clause (Clause 13) are limited to allowing loop mitigation (6.5.4.2) for
29 unicast frames supported by SPBB as well as loop prevention (6.5.4.1). The need for unicast multicast
30 congruence (3.2), the simplification possible by not introducing differences between SPBB unicast
31 forwarding and the other uses of SPTs, and the need for source address lookup to support loop mitigation
32 means that all shortest path bridged frames are assigned to an SPT rooted at the source bridge and follow the
33 standard bridging paradigm of multicast distribution with filtering, even when the frame has a single
34 destination and the path to the destination is known through the use of routing protocol (ISIS-SPB).
35
36
37

38 NOTE—When loop mitigation is used for unicast frames, the Port State used to prevent loops (as expressed by the state
39 machine variables forwarding and learning) need only apply to frames with group destination addresses.
40

41 SPT Bridges send and receive BPDUs in order to advertise their presence to, and recognize the presence of,
42 other bridges. The requirement for loop-free SPT connectivity also means that SPT Bridges have to
43 communicate with their nearest neighbors, when calculations that follow the reception of ISIS-SPB
44 messages have been completed rather than as a part of the IS-IS protocol itself. The agreements (13.17) that
45 satisfy this requirement could be separated conceptually from other uses of BPDUs, but the opportunity to
46 share common information elements, synchronization of neighbor state, and an overall reduction in the
47 number of protocol frames sent make it convenient to use BPDUs to integrate its specification with the other
48 protocol variables, procedures, and state machines in this clause (13.24–13.40).
49
50

51 SPT Bridges use the configuration and active topology management parameters (Bridge Identifiers, Port
52 Path Costs) already required for the CIST. They also retain MSTP capabilities as a subset of their operation,
53 though it is always possible to configure zero MSTIs.
54

13.7 Compatibility and interoperability

RSTP, MSTP, and the SPB protocols are designed to interoperate with each other and with STP. This clause (13.7) reviews aspects of their design that are important to meeting that requirement. The SPB protocols and SPT BPDUs include the functionality provided by MSTP and MST BPDUs, so the compatibility with RSTP and STP provided by the latter extends to SPB.

13.7.1 Designated Port selection

Correct operation of the spanning tree protocols requires that all Bridge Ports attached to any given LAN agree on a single CIST Designated Port after a short interval sufficient for any Bridge Port to receive a configuration message from that Designated Port.

A unique spanning tree priority (13.9) is required for each Bridge Port for STP, which has no other way of communicating port roles. Since port numbers on different bridges are not guaranteed to be unique, this necessitates the inclusion of the transmitting bridge's Bridge Identifier in the STP BPDU. RSTP and MSTP's Port Protocol Migration state machines (13.32) ensure that all bridges attached to any LAN with an attached STP bridge send and receive STP BPDUs exclusively.

NOTE 1—This behavior satisfies the requirement for unique, agreed Designated Port for LANs with attached STP bridges, but means that an MST Region cannot completely emulate a single bridge since the transmitted Designated Bridge Identifier can differ on Bridge Ports at the region's boundary.

MSTP transmits and receives the Regional Root Identifier and not the Designated Bridge Identifier in the BPDU fields recognized by RSTP (14.9) to allow both the MSTP and the RSTP Bridges potentially connected to a single LAN to perform comparisons (13.9, 13.10) between all spanning tree priority vectors transmitted that yield a single conclusion as to which RSTP Bridge or MST Region includes the Designated Port. MST and RST BPDUs convey the transmitting port's CIST Port Role. This is checked on receipt by RSTP when receiving messages from a Designated Bridge (17.21.8 of IEEE Std 802.1D), thus ensuring that an RSTP Bridge does not incorrectly identify one MST Bridge Port as being Designated rather than another, even while omitting the competing Bridge Ports' Designated Bridge Identifiers from comparisons.

NOTE 2—This ability of MSTP Bridges to communicate the full set of MSTP information on shared LANs to which RSTP Bridges are attached avoids the need for the Port Protocol Migration machines to detect RSTP Bridges. Two or more MSTP and one or more RSTP Bridges may be connected to a shared LAN, with full MSTP operation. This includes the possibility of different MSTI Designated Ports (see 13.5.1).

13.7.2 Force Protocol Version

A Force Protocol Version parameter, controlled by management, permits emulation of aspects of the behavior of earlier versions of spanning tree protocol that are not strictly required for interoperability. The value of this parameter applies to all Bridge Ports.

- a) STP BPDUs, rather than MST BPDUs, are transmitted if Force Protocol Version is 0. RST BPDUs omit the MST Configuration Identifier and all MSTI Information.
- b) RST BPDUs, rather than MST BPDUs, are transmitted if Force Protocol Version is 2. RST BPDUs omit the MST Configuration Identifier and all MSTI Information.
- c) All received BPDUs are treated as being from a different MST Region if Force Protocol Version is 0 or 2.
- d) Rapid transitions are disabled if Force Protocol Version is 0. This allows MSTP Bridges to support applications and protocols that can be sensitive to the increased rates of frame duplication and misordering that can arise under some circumstances, as discussed in Annex K of IEEE Std 802.1D.
- e) The MSTP state machines allow full MSTP behavior if Force Protocol Version is 3 or more.
- f) SPT BPDUs are transmitted if Force Protocol Version is 4 or more.

NOTE— Force Protocol Version does not support multiple spanning trees with rapid transitions disabled.

13.8 MST Configuration Identifier

It is essential that all bridges within an MST or SPT Region agree on the allocation of VIDs to spanning trees. If the allocation differs, frames for some VIDs may be duplicated or not delivered to some LANs at all. MST and SPT Bridges check that they are allocating VIDs to the same spanning trees as their neighbors in the same region by transmitting and receiving MST Configuration Identifiers in BPDUs. Each MST Configuration Identifier includes a Configuration Digest that is compact but designed so that two matching identifiers have a very high probability of denoting the same allocation of VIDs to MSTIDs (3.n, 8.4) even if the identifiers are not explicitly managed. Suitable management practices for equipment deployment and for choosing Configuration Names and Revision Levels (see below) can guarantee that the identifiers will differ if the VID to tree allocation differs within a single administrative domain.

An MST or SPT Region comprises one or more MST or SPT Bridges with the same MST Configuration Identifiers, interconnected by and including LANs for which one of those bridges is the Designated Bridge for the CIST and which have no bridges attached that cannot receive and transmit RST BPDUs.

SPT BPDUs are a superset of MST BPDUs received and validated by MST Bridges as if they were MST BPDUs, so MSTP operates within an SPT Region just as if it were an MST Region. However, each SPT Set is represented by a reserved MSTID value that is included in the Configuration Digest, so when shortest path bridging is used an SPT Region contains only SPT Bridges.

Each MST Configuration Identifier contains the following components:

- 1) A Configuration Identifier Format Selector, the value 0 encoded in a fixed field of one octet to indicate the use of the following components as specified in this standard.
- 2) The Configuration Name, a variable length text string encoded within a fixed field of 32 octets, conforming to RFC 2271's definition of SnmpAdminString. If the Configuration Name is less than 32 characters, the text string should be terminated by the NUL character, with the remainder of the 32-octet field filled with NUL characters. Otherwise the text string is encoded with no terminating NUL character.
- 3) The Revision Level, an unsigned integer encoded within a fixed field of 2 octets.
- 4) The Configuration Digest, a 16-octet signature of type HMAC-MD5 (see IETF RFC 2104) created from the MST Configuration Table (3.86, 8.9). To calculate the digest, the table is considered to contain 4096 consecutive two octet elements, where each element of the table (with the exception of the first and last) contains an MSTID value encoded as a binary number, with the first octet being most significant. The first element of the table contains the value 0, the second element the MSTID value corresponding to VID 1, the third element the MSTID value corresponding to VID 2, and so on, with the next to last element of the table containing the MSTID value corresponding to VID 4094, and the last element containing the value 0. The key used to generate the signature consists of the 16-octet string specified in Table 13-1.

Table 13-1—Configuration Digest Signature Key

Parameter	Mandatory value
Configuration Digest Signature Key	0x13AC06A62E47FD51F95D2BA243CD0346

NOTE—The formulation of the signature as described above does not imply that a separate VID to MSTID translation table has to be maintained by the implementation; rather that it should be possible for the implementation to derive the logical contents of such a table, and the signature value as specified above, from the other configuration information maintained by the implementation, as described in Clause 12.

The Configuration Digests of some VID to MSTID translations are shown in Table 13-2 to help verify implementations of this specification.

Table 13-2—Sample Configuration Digest Signature Keys

VID to MSTID translation	Configuration Digest
All VIDs map to the CIST, no VID mapped to any MSTI	0xAC36177F50283CD4B83821D8AB26DE62
All VIDs map to MSTID 1	0xE13A80F11ED0856ACD4EE3476941C73B
Every VID maps to the MSTID equal to (VID modulo 32) + 1	0x9D145C267DBE9FB5D893441BE3BA08CE

It is recommended that MST and SPT Bridge implementations provide an easily selectable or default configuration comprising a Configuration Name of the Bridge Address as a text string using the Hexadecimal Representation specified in IEEE Std 802, a Revision Level of 0, and a Configuration Digest representing a VID to MSTID translation table containing the value 0 for every element. Such a table represents the mapping of all VLANs to the CIST. Since the Bridge Address is unique to each bridge, no two bridges using this default configuration will be identified as belonging to the same region.

13.9 Spanning Tree Priority Vectors

Priority vectors permit concise specification of each protocol's computation of the active topology, both in terms of the entire network and of the operation of individual bridges in support of the distributed algorithm. MST, RST, and STP bridges use *spanning tree priority vector* information in Configuration Messages (13.14), sent and received from neighbouring bridges, to assign Port Roles that determine each port's participation in a fully and simply connected active topology based on one or more spanning trees. SPT Bridges use ISIS-SPB to disseminate the information necessary to calculate Port Roles throughout SPT Regions, and to perform those calculations, but also use this Configuration Message information for the CIST to ensure that neighbouring bridges agree on that active topology, and to receive the information if the CIST Root lies outside their SPT Region.

CIST priority vectors comprise the following components:

- a) CIST Root Identifier, the Bridge Identifier of the CIST Root;
- b) CIST External Root Path Cost, the inter-regional cost from the transmitting bridge to the CIST Root;
- c) CIST Regional Root Identifier, the Bridge Identifier of the single bridge in a region whose CIST Root Port connects to a LAN in a different region, or of the CIST Root if that is within the region;
- d) CIST Internal Root Path Cost, the cost to the CIST Regional Root;
- e) CIST Designated Bridge Identifier, the Bridge Identifier for the transmitting bridge for the CIST;
- f) CIST Designated Port Identifier, the Port Identifier for the transmitting port for the CIST;
- g) CIST Receiving Port Identifier (not conveyed in Configuration Messages, used as tie-breaker between otherwise equal priority vectors within a receiving bridge).

The first two components of the CIST priority vector are significant throughout the network. The CIST External Root Path Cost transmitted by a bridge is propagated along each path from the CIST Root, is added to at Bridge Ports that receive the priority vector from a bridge in a different region, and thus accumulates costs at the Root Ports of bridges that are not MST or SPT Bridges or are CIST Regional Roots and is constant within a region. The CIST Internal Root Path Cost is only significant and defined within a region. The last three components are used as locally significant tie breakers, not propagated within or between regions. The set of all CIST spanning tree priority vectors is thus totally ordered.

1 Since RSTP is not aware of regions, RSTP specifications also refer to the CIST Root Identifier and CIST
2 External Root Path Cost simply as the Root Bridge Identifier and Root Path Cost, respectively, and omit the
3 CIST Internal Root Path Cost (as does STP). MSTP encodes the CIST Regional Root Identifier in the BPDU
4 field used by RSTP to convey the Designated Bridge Identifier (14.5), so an entire region appears to an
5 RSTP capable bridge as a single bridge. RSTP's CST use of CIST priority vectors can be conveniently
6 specified by the use of the zero for the Internal Root Path Cost and the same values for both the Regional
7 Root Identifier and Designated Bridge Identifier.

8
9 NOTE 1—The path to the CIST Root from a bridge with a CIST Root Port within a region always goes to or through the
10 CIST Regional Root.

11 NOTE 2—STP lacks the fields necessary for MST Bridges to communicate the Designated Bridge Identifier to resolve a
12 potential priority vector tie, and MSTP BPDUs are not sent on a LAN to which an STP bridge is attached.

13
14 Each MSTI priority vector comprises the following components for the particular MSTI in a given region:

- 15
16 h) MSTI Regional Root Identifier, the Bridge Identifier of the MSTI Regional Root;
17 i) MSTI Internal Root Path Cost, the path cost to the MSTI Regional Root;
18 j) MSTI Designated Bridge Identifier, the Bridge Identifier for the transmitting bridge for this MSTI;
19 k) MSTI Designated Port Identifier, the Port Identifier for the transmitting port for this MSTI;
20 l) MSTI Receiving Port Identifier (not conveyed in Configuration Messages).

21
22 The set of priority vectors for a given MSTI is only defined within a region. Within each region they are
23 totally and uniquely ordered. A CIST Root Identifier, CIST External Root Path Cost, and CIST Regional
24 Root Identifier tuple defines the connection of the region to the external CST and is required to be associated
25 with the source of the MSTI priority vector information when assessing the agreement of information for
26 rapid transitions to forwarding, but plays no part in priority vector calculations.

27
28 As each bridge and Bridge Port receives priority vector information from bridges and ports closer to the
29 Root, calculations and comparisons are made to decide which priority vectors to record, and what
30 information to pass on. Decisions about a given port's role are made by comparing the priority vector
31 components that could be transmitted with that received by the port. For all components, a lesser numerical
32 value is better, and earlier components in the above lists are more significant. As each Bridge Port receives
33 information from ports closer to the Root, additions are made to one or more priority vector components to
34 yield a worse priority vector for potential transmission through other ports of the same bridge.

35
36 NOTE 3—The consistent use of lower numerical values to indicate better information is deliberate as the Designated
37 Port that is closest to the Root Bridge, i.e., has a numerically lowest path cost component, is selected from among
38 potential alternatives for any given LAN (13.9). Adopting the conventions that lower numerical values indicate better
39 information, that where possible more significant priority components are encoded earlier in the octet sequence of a
40 BPDU (14.3), and that earlier octets in the encoding of individual components are more significant (14.2) allow
41 concatenated octets that compose a priority vector to be compared as if they were a multiple octet encoding of a single
42 number, without regard to the boundaries between the encoded components. To reduce the confusion that naturally arises
43 from having the lesser of two numerical values represent the better of the two, i.e., that chosen all other factors being
44 equal, this clause uses the following consistent terminology. Relative numeric values are described as “least,” “lesser,”
45 “equal,” and “greater,” and their comparisons as “less than,” “equal to,” or “greater than,” while relative Spanning Tree
46 priorities are described as “best,” “better,” “the same,” “different,” and “worse” and their comparisons as “better than,”
47 “the same as,” “different from,” and “worse than.” The operators “<” and “=” represent less than and equal to,
48 respectively. The terms “superior” and “inferior” are used for comparisons that are not simply based on priority but
49 include the fact that a priority vector can replace an earlier vector transmitted by the same Bridge Port. All of these terms
are defined for priority vectors in terms of the numeric comparison of components below (13.10, 13.11).

50 NOTE 4—To ensure that the CIST and each MSTI's view of the boundaries of each region remain in synchronization at
51 all times, each BPDU carries priority vector information for the CIST as well as for MSTIs. Associating the CIST Root
52 Identifier, External Path Cost, and Regional Root Identifier with the priority vector information for each MSTI does not
53 therefore raise a requirement to transmit these components separately. A single bit per MSTI vector, the Agreement flag,
54 satisfies the requirement to indicate that the vector beginning with the MSTI Regional Root Identifier for that specific
MSTI has always been associated with the single CIST Root Identifier, etc. transmitted in the BPDU.

To allow the active topology to be managed for each tree through adjusting the relative priority of different bridges and Bridge Ports for selection as the CIST Root, a CIST or MSTI Regional Root, Designated Bridge, or Designated Port, the priority component of the bridge's Bridge Identifier can be independently chosen for the CIST and for each MSTI. The priority component used by the CIST for its CIST Regional Root Identifier can also be chosen independently of that used for the CIST Root Identifier. Independent configuration of Port Path Cost and Port Priority values for the CIST and for each MSTI can also be used to control selection of the various roles for the CIST and for each MSTI.

In principle an SPT priority vector could be defined within an SPT Region, comprising a Regional Root Identifier and Internal Root Path Cost, and reflects the construction of each SPT (lowest Internal Root Path Cost from each bridge and LAN to the Regional Root). However the set of such vectors cannot be totally ordered by the addition of purely local tie-breaker components: as each SPT Set has to be symmetric. Clause 29 specifies ISIS-SPB's calculation of SPTs.

13.10 CIST Priority Vector calculations

The *port priority vector* is the priority vector held for the port when the reception of BPDUs and any pending update of information has been completed:

$$\text{port priority vector} = \{ \text{RootID} : \text{ExtRootPathCost} : \\ \text{RRootID} : \text{IntRootPathCost} : \\ \text{DesignatedBridgeID} : \text{DesignatedPortID} : \text{RcvPortID} \}$$

The *message priority vector* is the priority vector conveyed in a received Configuration Message. For a bridge with Bridge Identifier B receiving a Configuration Message on a port P_B from a Designated Port P_D on bridge D claiming a CIST Root Identifier of R_D , a CIST External Root Path Cost of ERC_D , a CIST Regional Root Identifier of RR_D , and a CIST Internal Root Path Cost of IRC_D :

$$\text{message priority vector} = \{ R_D : ERC_D : RR_D : IRC_D : D : P_D : P_B \}$$

If B is not in the same region as D , the Internal Root Path Cost has no meaning to B and is set to 0.

NOTE—If a Configuration Message is received in an RST or STP BPDU, both the Regional Root Identifier and the Designated Bridge Identifier are decoded from the single BPDU field used for the Designated Bridge Parameter (the MST BPDU field in this position encodes the CIST Regional Root Identifier). An STP or RSTP bridge is always treated by MSTP as being in an region of its own, so the Internal Root Path Cost is decoded as zero.

The received CIST message priority vector is the same as B 's port priority vector if:

$$(R_D == \text{RootID}) \ \&\& \ (ERC_D == \text{ExtRootPathCost}) \ \&\& \ (RR_D == \text{RRootID}) \ \&\& \\ (IRC_D == \text{IntRootPathCost}) \ \&\& \ (D == \text{DesignatedBridgeID}) \ \&\& \ (P_D == \text{DesignatedPortID})$$

and is better if:

$$\begin{aligned} & ((R_D < \text{RootID}) \ \&\& \\ & ((R_D == \text{RootID}) \ \&\& \ (ERC_D < \text{ExtRootPathCost})) \ \&\& \\ & ((R_D == \text{RootID}) \ \&\& \ (ERC_D == \text{ExtRootPathCost}) \ \&\& \ (RR_D < \text{RRootID})) \ \&\& \\ & ((R_D == \text{RootID}) \ \&\& \ (ERC_D == \text{ExtRootPathCost}) \ \&\& \ (RR_D == \text{RRootID}) \\ & \ \&\& \ (IRC_D < \text{IntRootPathCost})) \ \&\& \\ & ((R_D == \text{RootID}) \ \&\& \ (ERC_D == \text{ExtRootPathCost}) \ \&\& \ (RR_D == \text{RRootID}) \\ & \ \&\& \ (IRC_D == \text{IntRootPathCost}) \ \&\& \ (D < \text{DesignatedBridgeID})) \ \&\& \\ & ((R_D == \text{RootID}) \ \&\& \ (ERC_D == \text{ExtRootPathCost}) \ \&\& \ (RR_D == \text{RRootID}) \\ & \ \&\& \ (IRC_D == \text{IntRootPathCost}) \ \&\& \ (D == \text{DesignatedBridgeID}) \\ & \ \&\& \ (P_D < \text{DesignatedPortID})) \end{aligned}$$

A received CIST message priority vector is superior to the port priority vector if, and only if, the message priority vector is better than the port priority vector, or the Designated Bridge Identifier Bridge Address and Designated Port Identifier Port Number components are the same; in which case, the message has been transmitted from the same Designated Port as a previously received superior message, i.e., if:

$$\{R_D : ERC_D : RR_D : IRC_D : D : P_D : P_B\}$$

is better than

$$\{RootID : ExtRootPathCost : RRootID : IntRootPathCost : DesignatedBridgeID : DesignatedPortID : RcvPortID\}$$

$$) \text{ || } ((D.BridgeAddress == DesignatedBridgeID.BridgeAddress) \&\& (P_D.PortNumber == DesignatedPortID.PortNumber))$$

If the message priority vector received in a Configuration Message from a Designated Port is superior, it will replace the current port priority vector.

A *root path priority vector* for a port can be calculated from a port priority vector that contains information from a message priority vector, as follows.

If the port priority vector was received from a bridge in a different region (13.29.9), the External Port Path Cost EPC_{PB} is added to the External Root Path Cost component, and the Regional Root Identifier is set to the value of the Bridge Identifier for the receiving bridge. The Internal Root Path Cost component will have been set to zero on reception.

$$root\ path\ priority\ vector = \{R_D : ERC_D + EPC_{PB} : B : 0 : D : P_D : P_B\}$$

If the port priority vector was received from a bridge in the same region (13.29.9), the Internal Port Path Cost IPC_{PB} is added to the Internal Root Path Cost component.

$$root\ path\ priority\ vector = \{R_D : ERC_D : RR_D : IRC_D + IPC_{PB} : D : P_D : P_B\}$$

The *bridge priority vector* for a bridge B is the priority vector that would, with the Designated Port Identifier set equal to the transmitting Port Identifier, be used as the message priority vector in Configuration Messages transmitted on bridge B 's Designated Ports if B was selected as the Root Bridge of the CIST.

$$bridge\ priority\ vector = \{B : 0 : B : 0 : B : 0 : 0\}$$

The *root priority vector* for bridge B is the best priority vector of the set of priority vectors comprising:

- a) the bridge priority vector; plus
- b) all root path priority vectors that:
 - 1) have a Designated Bridge Identifier D that is not equal to B , and
 - 2) were received from a Bridge Port attached to a LAN that is not in the same SPT Region as B ;
 plus
- c) the root path priority vector calculated by ISIS-SPB (if SPB is enabled, and the attached LAN is within the bridge's SPT Region).

NOTE—The BPDUs sent and received by all bridges attached to a LAN allow MST and SPT Bridges to determine whether each attached LAN is within their region independently of priority vector values. SPT Bridges take advantage of this fact by using ISIS-SPB to communicate the CST priority vector for each of SPT Region's potential Master Ports throughout the region, at the same time as ISIS-SPB calculates the Port Roles for each SPT (see *Clause 29*).

If the bridge priority vector is the best of this set of priority vectors, Bridge B has been selected as the CIST Root. Otherwise the root priority vector will only be that calculated by ISIS-SPB if the Root Bridge or Regional Root is within the bridge's SPT Region.

1 The *designated priority vector* for a port Q on bridge B is the root priority vector with B 's Bridge Identifier B
2 substituted for the *DesignatedBridgeID* and Q 's Port Identifier Q_B substituted for the *DesignatedPortID* and
3 *RcvPortID* components. If Q is attached to a LAN that has one or more STP bridges attached (as determined
4 by the Port Protocol Migration state machine), B 's Bridge Identifier B is also substituted for the the *RRootID*
5 component.

6
7 If the designated priority vector is better than the port priority vector and the LAN attached to the port is not
8 within the bridge's SPT Region (possibly because SPB is not enabled), the port will be the Designated Port
9 for that LAN and the current port priority vector will be updated. If the attached LAN is within the bridge's
10 SPT Region, then the Port Role is as calculated by ISIS-SPB and the port priority vector will be updated
11 with the designated priority vector if and only if the port is a Designated Port. The message priority vector in
12 Configuration Messages transmitted by a port always comprises the components of the designated priority
13 vector for the port, even if the port is a Root Port.

14 13.11 MST Priority Vector calculations

15
16
17 The *port priority vector* is the priority vector held for the port when the reception of BPDUs and any
18 pending update of information has been completed:

$$19 \text{ port priority vector} = \{RRootID : IntRootPathCost : \\ 20 \text{ DesignatedBridgeID} : DesignatedPortID : RcvPortID\}$$

21
22
23 The *message priority vector* is the priority vector conveyed in a received Configuration Message. For a
24 bridge with Bridge Identifier B receiving a Configuration Message on a Regional Port P_B from a Designated
25 Port P_D on bridge D belonging to the same MST Region and claiming an Internal Root Path Cost of IRC_D :

$$26 \text{ message priority vector} = \{RR_D : IRC_D : D : P_D : P_B\}$$

27
28
29 An MSTI message priority vector received from a bridge not in the same MST Region is discarded.

30
31 An MSTI message priority vector received from a Bridge Port internal to the region is the same as the port
32 priority vector if:

$$33 ((RR_D == RRootID) \&\& (IRC_D == IntRootPathCost) \&\& (D == DesignatedBridgeID) \\ 34 \&\& (P_D == DesignatedPortID))$$

35
36
37 and is better if:

$$38 ((RR_D < RRootID) \&\& \\ 39 ((RR_D == RRootID) \&\& (IRC_D < IntRootPathCost) \&\& \\ 40 ((RR_D == RRootID) \&\& (IRC_D == IntRootPathCost) \&\& (D < DesignatedBridgeID)) \&\& \\ 41 ((RR_D == RRootID) \&\& (IRC_D == IntRootPathCost) \&\& (D == DesignatedBridgeID) \\ 42 \&\& (P_D < DesignatedPortID)))$$

43
44
45 An MSTI message priority vector is superior to the port priority vector if, and only if, the message priority
46 vector is better than the port priority vector, or the Designated Bridge Identifier Bridge Address and
47 Designated Port Identifier Port Number components are the same; in which case, the message has been
48 transmitted from the same Designated Port as a previously received superior message, i.e., if:

$$49 \{RR_D : IRC_D : D : P_D : P_B\} \\ 50 \text{ is better than} \\ 51 \{RRootID : IntRootPathCost : DesignatedBridgeID : DesignatedPortID : RcvPortID\}$$

1) || ((*D.BridgeAddress* == *DesignatedBridgeID.BridgeAddress*) &&
2 (*P_D.PortNumber* == *DesignatedPortID.PortNumber*))
3

4 If the message priority vector received in a Configuration Message from a Designated Port for the MSTI is
5 superior, it will replace the current port priority vector.
6

7 NOTE 1—The agree flag (13.27.4) for the port and this MSTI will be cleared if the CIST Root Identifier, CIST
8 External Root Path Cost, and CIST Regional Root Identifier in the received BPDU are not better than or the same as
9 those for the CIST designated priority vector for the port following processing of the received BPDU.

10 A *root path priority vector* for a given MSTI can be calculated for a port that has received a port priority
11 vector from a bridge in the same region by adding the Internal Port Path Cost IPC_{PB} to the Internal Root
12 Path Cost component.
13

$$14 \quad \textit{root path priority vector} = \{RR_D : IRC_D + IPC_{PB} : D : P_D : P_B\}$$

15
16 NOTE 2—Internal Port Path Costs are independently manageable for each MSTI, as are the priority components of the
17 Bridge and Port Identifiers. The ability to independently manage the topology of each MSTI without transmitting
18 individual Port Path Costs is a key reason for retaining the use of a Distance Vector protocol for constructing MSTIs. A
19 simple Link State Protocol requires transmission (or *a priori* sharing) of all Port Costs for all links.
20

21 The *bridge priority vector* for a bridge *B* is the priority vector that would, with the Designated Port Identifier
22 set equal to the transmitting Port Identifier, be used as the message priority vector in Configuration
23 Messages transmitted on bridge *B*'s Designated Ports if *B* was selected as the Root Bridge of a given tree.
24

$$25 \quad \textit{bridge priority vector} = \{B : 0 : B : 0\}$$

26
27 The *root priority vector* for bridge *B* is the best priority vector of the set of priority vectors comprising the
28 bridge priority vector plus all root path priority vectors whose Designated Bridge Identifier *D* is not equal to
29 *B*. If the bridge priority vector is the best of this set of priority vectors, Bridge *B* has been selected as the
30 Root of the tree.
31

32 The *designated priority vector* for a port *Q* on bridge *B* is the root priority vector with *B*'s Bridge Identifier *B*
33 substituted for the *DesignatedBridgeID* and *Q*'s Port Identifier Q_B substituted for the *DesignatedPortID* and
34 *RcvPortID* components.
35

36 If the designated priority vector is better than the port priority vector, the port will be the Designated Port for
37 the attached LAN and the current port priority vector will be updated. The message priority vector in MSTP
38 BPDUs transmitted by a port always comprises the components of the designated priority vector of the port,
39 even if the port is a Root Port.
40

41 Figure 13-8 shows the priority vectors and the active topology calculated for an MSTI in a region of the
42 example network of Figure 13-6.
43
44

45 **13.12 Port Role assignments**

46
47 Each bridge assigns CIST Port Roles (when new information becomes available as specified in this clause,
48 13.12) before assigning MSTI or SPT Port Roles. The calculations specified in 13.10 are used to assign a
49 role to each Bridge Port that is enabled as follows:
50

- 51 a) If the bridge is not the CIST Root, the source of the root priority vector is the Root Port.
- 52 b) Each port whose port priority vector is the designated priority vector is a Designated Port.
- 53 c) Each port, other than the Root Port, with a port priority vector received from another bridge is a
54 Alternate Port.

- 1 d) Each port with a port priority vector received from another port on this bridge is a Backup Port.

2
3 If the port is not enabled, i.e. its MAC_Operational status is FALSE or its Administrative Bridge Port state is
4 Disabled (8.4), it is assigned the Disabled Port role for the CIST, all MSTIs, and all SPTs, to identify it as
5 having no part in the operation of any of the spanning trees or the active topology of the network.

6
7 If the bridge is an MST or SPT Bridge, the calculations specified in 13.11 are used to assign a role to each
8 enabled Bridge Port for each MSTI as follows:

- 9
10 e) If the port is the CIST Root Port and the CIST port priority vector was received from a bridge in
11 another MST or SPT Region, the port is the Master Port.
12 f) If the bridge is not the MSTI Regional Root, the port that is the source of the MSTI root priority
13 vector is the Root Port.
14 g) Each port whose port priority vector is the designated priority vector derived from the root priority
15 vector is a Designated Port.
16 h) Each port, other than the Master Port or the Root Port, with a port priority vector received from
17 another bridge or a CIST port priority vector from a bridge in another region, is an Alternate Port.
18 i) Each port that has a port priority vector that has been received from another port on this bridge is a
19 Backup Port.
20

21
22 Independently of priority vector values and active topology calculations, each SPT Bridge Port determines
23 from received BPDUs whether all the bridges attached to its LAN are in the same SPT Region. If not, the
24 port is a Boundary Port, and its role for each SPT is determined by its CIST Port Role as follows:

- 25
26 j) If the port is the CIST Root Port, the port is the Master Port for all SPTs.
27 k) If the port is not the CIST Root Port, the port's role is the same as that for the CIST.
28

29 By excluding Boundary Ports from the physical topology used to calculate SPTs, and adopting CIST
30 connectivity at those ports, ISIS-SPB ensures that the use of SPVIDs (rather than each VLAN's Base VID)
31 is not required on shared media LANs attached to bridges in other regions.
32

33 SPT Bridges use ISIS-SPB to assign Port Roles for each SPT to non-Boundary Ports as follows:

- 34
35 l) If the bridge is not the SPT Root Bridge, the port that ISIS-SPB has calculated as providing the path
36 for frames assigned to the SPT and forwarded to the bridge from that SPT Root is the Root Port.
37 m) Each port, other than the Root Port, that ISIS-SPB has calculated as providing a path for frames
38 forwarded from the SPT Root to the attached LAN is a Designated Port.
39 n) Each port that is attached to the same LAN as a Designated Port for the SPT is a Backup Port.
40 o) Each port not assigned a Root, Designated, or Backup Port role is an Alternate Port.
41
42

43 **13.13 Stable connectivity**

44
45 This clause provides an analysis to show that RSTP, MSTP, and SPB protocols meet the goal of providing
46 full and simple connectivity for frames assigned to any given VLAN in a stable network, i.e., where the
47 physical topology has remained constant for long enough that the spanning tree information communicated
48 and processed by bridges is not changing.
49

50 NOTE 1—The FDB can be configured to prevent connectivity, in particular this analysis assumes that every Bridge Port
51 is a member of every VLAN's Member Set (8.8.9). Spanning tree protocol controls can also be used to prevent new
52 connectivity (to allow for upgrades), or to disallow certain topologies (restricting the location of the CIST Root, for
53 example). This analysis assumes that those controls are not being used, that all the bridges are using conformant protocol
54 implementations and that the LANs are providing omnidirectional connectivity.

1 Every LAN provides connectivity for all frames between all attached Bridge Ports. Every bridge provides
2 connectivity between and only between its CIST Root and Designated Ports for frames assigned to the CIST,
3 between the Root, Designated, and Master Ports for a given MSTI for frames assigned to that MSTI, and
4 between Root and Designated Ports for a given SPT for frames assigned to that SPT. Any given bridge does
5 not assign frames to more than one tree and has one Root Port per tree, unless it is the Root of that tree.

6
7 Every LAN has one and only one CIST Designated Port, and every bridge apart from the CIST Root has one
8 and only one CIST Root Port. The CIST spanning tree priority vector of the Designated Port attached to the
9 LAN that is a bridge's Root Port is better than of any Designated Port of that bridge. The CIST thus connects
10 all bridges and LANs (is "spanning") and loop free (is a "tree").

11
12 Each MST or SPT Region is bounded by CST Root and Alternate Ports. At the CST Root Ports connectivity
13 for frames assigned to MSTIs or SPTs within the connected regions is the same as that for the CIST. Every
14 region apart from that containing the CIST Root has a single CST Root Port, identified as the Master Port for
15 each MSTI. The CIST spanning tree priority vector of the LAN attached to the region's CST Root Port is
16 better than that of any CST Designated Port of a bridge in the region attached to a LAN also attached to the
17 CST Root Port of another region. The CST thus provides loop free connectivity between all regions.

18
19 NOTE—The term "Common Spanning Tree (CST)" refers to the CIST connectivity between regions, and the term
20 "Internal Spanning Tree (IST)" to the CIST connectivity within each region. An RSTP bridge and the LANs for which it
21 is the Designated Bridge are conveniently considered as forming an MST region of limited extent.

22
23 Within each region each frame is consistently assigned to the CIST, an MSTI, or an SPT, and each of these
24 spanning trees provides full loop-free connectivity to each of the bridges within the region, just as the CIST
25 does for the network as a whole, including connectivity between the CST Root Port (Master Port) and the
26 CST Designated Ports. Since each bridge or LAN is in one and only one region, and it has already been
27 shown that loop free connectivity is provided between regions, loop free connectivity is thus provided
28 between all the bridges and LANs in the network.

29
30 Figure 13-9 illustrates the above connectivity with the simple example of Region 1 from the example
31 network of Figure 13-6 and Figure 13-8. Bridge 0.42 has been selected as the CIST Root and Regional Root,
32 bridge 0.57 as the Regional Root for MSTI 1, and bridge 2.83 for MSTI 2 by management of the per MSTI
33 Bridge Identifier priority component. The potential loop through the three bridges in the region is blocked at
34 different Bridge Ports for the CIST, and each MSTI, but the connectivity across the region and from each
35 LAN and bridge in the region through the boundaries of the region is the same in all cases.


36 37 **13.14 Communicating Spanning Tree information**

38
39 A Spanning Tree Protocol Entity transmits and receives group addressed BPDUs (*Clause 14, 8.13.5*)
40 through each of its Bridge Ports to communicate with the Spanning Tree Protocol Entities of the other
41 bridges attached to the same LAN. The group address used is one of a small number of addresses that
42 identify frames that are not directly forwarded by bridges (8.6.3), but the information contained in the
43 BPDU can be used by a bridge in calculating its own BPDUs to transmit and can stimulate that transmission.

44
45 BPDUs are used to convey the following:

- 46
47
- 48 a) Configuration Messages
 - 49 b) Topology Change Notification (TCN) Messages
 - 50 c) MST Configuration Identifiers
 - 51 d) Agreement parameters to support SPB.
- 52

53 Designated Ports also transmit BPDUs at intervals to guard against loss and to assist in the detection of
54 failed components (LANs, bridges, or Bridge Ports), so all messages are designed to be idem potent.

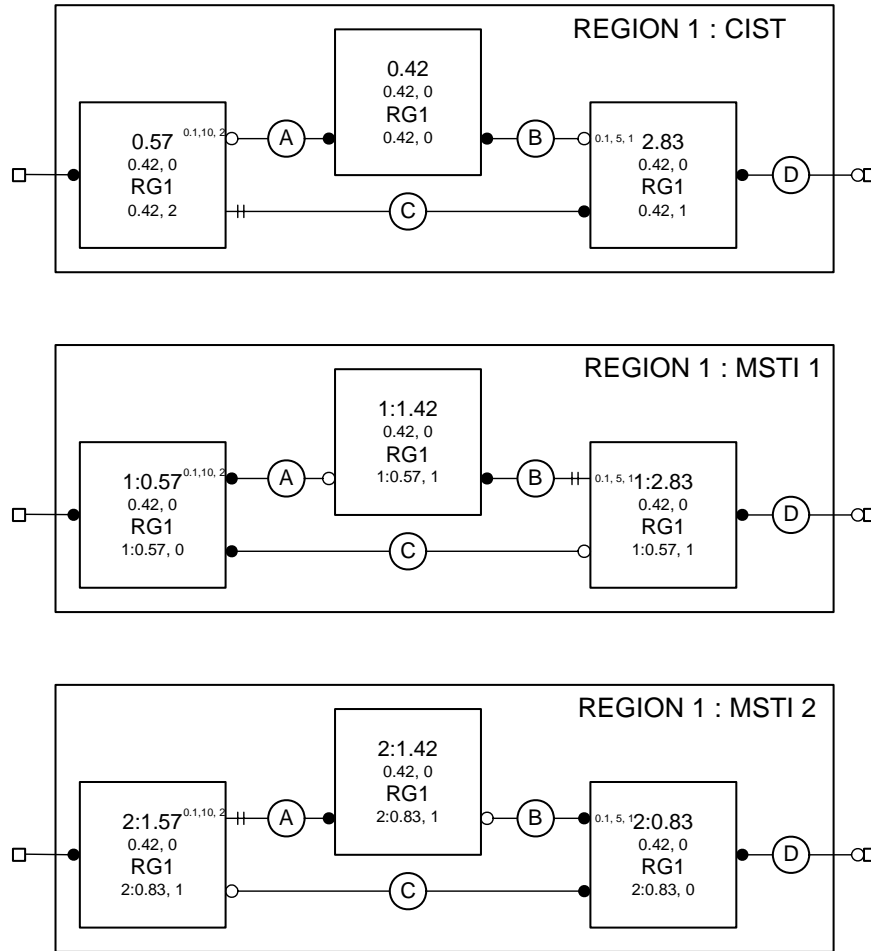

34
35
36
37
38
39
40
41

Figure 13-9—CIST and MSTI active topologies in Region 1 of the example network

A Configuration Message for the CIST can be encoded in an STP Configuration BPDU (14.3.1), an RST BPDU (14.3.2), an MST BPDU (14.3.3), or an SPT BPDU(<>). A TCN Message for the CIST can be encoded in an STP Topology Change Notification BPDU (14.3.1), or an RST, MST, or SPT BPDU with the TC flag set. Configuration and TCN Messages for the CIST and for all MSTIs in an MST Region are encoded in a single MST or SPT BPDU, as is the MST Configuration Identifier. No more than 64 MSTI Configuration Messages shall be encoded in an MST BPDU, and no more than 64 MSTIs shall be supported by an MST Bridge.

42
43
44
45
46
47
48

When SPB is enabled, ISIS-SPB is used to communicate CST priority vectors, IST topology information, and CST topology change information to and from the other bridges in the SPT Region and to calculate IST and SPT Port Roles and designated priority vectors. However the full CIST priority information is still conveyed in SPT BPDUs, partly to encode agreement information for the IST, but principally to support interoperability at the boundaries of each region without having to assess whether the transmitting port is at a boundary before deciding what to encode in each BPDU.

49
50
51
52

Configuration and Topology Change Notification BPDUs are distinguished from each other and from RST and MST BPDUs by their BPDU Type (Clause 14). RST and MST BPDUs share the same BPDU Type and are distinguished by their version identifiers.

53
54

Bridges implementing STP (Clause 8 of IEEE Std 802.1D, 1998 Edition) transmit and decode Configuration and Topology Change Notification BPDUs, and ignore RST and MST BPDUs on receipt. This ensures that

1 connection of a Bridge Port of such a bridge to a LAN that is also attached to by a bridge implementing
2 RSTP or MSTP is detected, as transmission of RSTP or MSTP BPDUs does not suppress regular
3 transmissions by the STP bridge. This functionality is provided by the Port Protocol Migration state machine
4 for RSTP (13.32). The Port Protocol Migration state machines select the BPDU types used to encode
5 Spanning Tree messages so that all bridges attached to the same LAN participate in a spanning tree protocol,
6 while maximizing the available functionality. If one or more attached bridges only implement STP, only
7 Configuration and Topology Change Notification BPDUs will be used and the functionality provided by the
8 protocol will be constrained.
9

10 11 **13.15 Changing Spanning Tree information** 12

13 Addition, removal, failure, or management of the parameters of bridges and LAN connectivity can change
14 spanning tree information and require Port Role changes in all or part of the network (for the CIST) or all or
15 part of an MST or SPT Region (for an MSTI or SPT Set). A CIST or MSTI configuration message received
16 in a BPDU is considered superior to, and will replace, that recorded in the receiving port's port priority
17 vector if its message priority vector is better, or if it was transmitted by the same Designated Bridge and
18 Designated Port and the message priority vector, timer, or hop count information differ from those recorded.
19

20 RSTP and MSTP propagate new information rapidly from bridge to bridge, superseding prior information
21 and stimulating further transmissions until it reaches either Designated Ports that have already received the
22 new information through redundant paths in the network or the leaves of the Spanning Tree, as defined by
23 the new configuration. Configuration Message transmissions will then once more occur at regular intervals
24 from ports selected as Designated Ports.
25

26 To ensure that old information does not endlessly circulate through redundant paths in the network,
27 preventing the effective propagation of the new information, MSTP associates a hop count with the
28 information for each spanning tree. The hop count is assigned by the CIST Regional Root or the MSTI
29 Regional Root and decremented by each receiving port. Received information is discarded and the port
30 made a Designated Port if the hop count reaches zero.
31
32

33 RSTP and MSTP's CST processing do not use an explicit hop count (for reasons of STP compatibility), but
34 detect circulating aged information by treating the BPDU Message Age parameter as an incrementing hop
35 count with Max Age as its maximum value. MSTP increments Message Age for information received at the
36 boundary of an MST Region, discarding the information if necessary.
37
38

39 If a Bridge Port's MAC_Operational parameter becomes FALSE, the port becomes a Disabled Port and
40 received information is discarded. Spanning tree information for the tree can be recomputed, the bridge's
41 Port Roles changed, and new spanning tree information transmitted if necessary. Not all component failure
42 conditions can be detected in this way, so each Designated Port transmits BPDUs at regular intervals and a
43 receiving port will discard information and become a Designated Port if two transmissions are missed.
44

45 NOTE—Use of a separate hop count and message loss detection timer provides superior reconfiguration performance
46 compared with the original use of Message Age and Max Age by STP. Connectivity loss detection is not compromised
47 by the need to allow for the overall diameter of the network, nor does the time allowed extend the number of hops
48 permitted to aged recirculating information. Management calculation of the necessary parameters for custom topologies
49 is also facilitated, as no allowance needs to be made for relative timer jitter and accuracy in different bridges.
50

51 ISIS-SPB communicates CST, IST, and SPT information throughout an SPT Region using link state
52 procedures specified in *Clause 29*. In addition to the normal hop-by-hop distribution of this information,
53 which is essential to guarantee its dissemination, each link state PDU is also distributed on the SPT rooted at
54 the originating bridge, so new information can reach bridges in the region with the same delay as data.

13.16 Changing Port States with RSTP or MSTP

The Port State for the CIST and each MSTI for each Bridge Port is controlled by state machines whose goal is to maximize connectivity without introducing temporary loops in each of these active topologies. Root Ports, Master Ports, and Designated Ports are transitioned to the Forwarding Port State, and Alternate Ports and Backup Ports to the Discarding Port State, as rapidly as possible. Transitions to the Discarding Port State can be simply effected without the risk of data loops. This clause (13.16) describes the conditions that RSTP and MSTP use to transition a Port State for a given spanning tree to Forwarding.

Starting with the assumption that any connected fragment of a network is composed of bridges, Bridge Ports, and connected LANs that form a subtree of a spanning tree, ports with Root Port, Master Port, or Designated Port roles are transitioned using conditions that ensure that the newly enlarged fragment continues to form either a subtree or the whole of the spanning tree. Since the conditions are used every time a fragment is enlarged, it is possible to trace the growth of a fragment from a single bridge—a consistent, if small, subtree of a spanning tree—to any sized fragment, thus justifying the initial assumption.

Port States in two subtrees, each bounded by ports that are not forwarding or are attached to LANs not attached to any other bridge, can be made consistent by waiting for any changes in the priority vector information used to assign Port Roles to reach all bridges in the network, thus ensuring that the subtrees are not, and are not about to be, joined by other Forwarding Ports. However, it can be shown that a newly selected Root Port can forward frames as soon as prior recent root ports on the same bridge cease to do so, without further communication from other bridges. Rapid transitions of Designated Ports and Master Ports do require an explicit Agreement from the bridges in the subtrees to be connected. The Agreement mechanism is described, together with a Proposal mechanism that forces satisfaction of the conditions if they have not already been met by blocking Designated Ports connecting lower subtrees that are not yet in agreement. The same Agreement mechanism is then used to transition the newly blocked ports back to forwarding, advancing any temporary cut in the active topology toward the edge of the network.

13.16.1 Subtree connectivity and priority vectors

Any given bridge B , the LANs connected through its Forwarding Designated Ports, the further bridges connected to those LANs through their Root Ports, the LANs connected to their Forwarding Designated Ports, and so on, recursively, comprise a subtree S_B . Any LAN L that is part of S_B will be connected to B through a Forwarding Designated Port P_{CL} on a bridge C also in S_B . L cannot be directly connected to any port P_B on bridge B unless B and C are one and the same, since the message priority vector for P_B is better than that of any port of any other bridge in S_B , and prior to Forwarding P_{CL} will have advertised its spanning port priority vector for long enough for it to receive any better message priority vector (within the design probabilities of protocol failure due to repeated BPDU loss) or will have engaged in an explicit confirmed exchange (see below) with all other Bridge Ports attached to that LAN.

NOTE—The analysis for the distance vector based RSTP and MSTP differs from that for the link state based ISIS-SPB (see 13.17). In the latter C 's priority vector can become better than B 's while C remains in S_B , without B being aware of the improvement first.

13.16.2 Root Port transition to Forwarding

It follows from the above that B 's Root Port can be transitioned to Forwarding immediately whether it is attached to a LAN in S_B or in the rest of the network, provided that all prior recent Root Ports on B (that might be similarly arbitrarily attached) have been transitioned to Discarding and the Root Port was not a Backup Port recently (B and C the same as above).

1 Alternate and Backup Ports. A bridge receiving a Proposal transitions any Designated Port not already
2 synchronized to Discarding so it can send the Agreement, and that port solicits an Agreement by sending a
3 Proposal in its turn.
4

5 NOTE 2—Agreements can be generated without prior receipt of a Proposal as soon as the necessary conditions are met.
6 Subsequent receipt of a Proposal serves to elicit a further Agreement. If all other ports have already been synchronized
7 (allSynced in Figure 13-10) and the Proposal's priority vector does not convey worse information, synchronization is
8 maintained and there is no need to transition Designated Ports to Discarding once more, or to transmit further Proposals.
9

10 **13.16.4 Master Port transition to Forwarding**

11
12 While the connectivity of the CIST from the CIST Regional Root through an MST Region to the rest of the
13 CST comprises a subtree rooted in the CIST Regional Root, the connectivity of the MSTI from the Master
14 Port includes both a subtree below the CIST Regional Root and a subtree rooted in the MSTI Regional Root
15 and connected to the CIST Regional Root by an MSTI Root Port. In the example network of Figure 13-6,
16 this latter subtree continues CST connectivity, from the Master Port on Bridge 86 through to LAN N, for
17 frames allocated to the MSTI within Region 2 (see Figure 13-11). In general either MSTI subtree could be
18 providing CST connectivity through a prior Master Port: the connectivity of both subtrees has to agree with
19 the new CIST Regional Root, before a new Master Port transitions to Forwarding.
20

21 NOTE 1—The physical layout shown in the two halves of Figure 13-11 differs in order to reflect the different priorities
22 and logical topologies for the two spanning tree instances. The layout convention is that Designated Ports are shown as
23 horizontal lines, Root Ports as vertical lines, and Alternate Ports as diagonal lines.
24

25 Figure 13-12 illustrates the extension of the Agreement mechanism to signal from Designated Ports to Root
26 Ports as well as vice versa. To ensure that an MSTI does not connect alternate Master Ports, an Agreement is
27 only recognized at an MSTI Port when the associated CIST Regional Root information matches that selected
28 by the receiving port. Proposals, eliciting Agreements, necessarily flow from Designated Ports to Root Ports
29 with the propagation of spanning tree information, so a new CIST Regional Root cannot transmit a Proposal
30 directly on its MSTI Root Ports. However, updating a CIST Designated Port's port priority vector with a
31 new Regional Root Identifier forces the port to discard frames for all MSTIs, thus initiating the Proposal
32 from the first bridge nearer the MSTI Regional Root that learns of the new Regional Root.
33

34 When an Agreement A_{MR} is sent by a Root Port P_{MR} on a Regional Root M , it attests that the CIST Root
35 Identifier and External Root Path Cost components of the message priority advertised on all LANs
36 connected to the CIST by P_{MR} through M are the same as or worse than those accompanying A_{MR} . The
37 connectivity provided by each MSTI can be independent of that provided by the CIST within the MST
38 Region and can therefore connect P_{MR} and one or more CIST Root Ports external to but attached at the
39 boundary of the region even as CIST connectivity within the region is interrupted in order to satisfy the
40 conditions for generating A_{MR} . The Agreement cannot therefore be generated unless all MSTI subtrees as
41 well as the CIST subtree internal to the region are in Agreement. To ensure that an MSTI does not connect to
42 a CIST subtree external to the region that does not meet the constraints on the CST priority vector
43 components, an Agreement received at an MSTI Designated Port from a Bridge Port not internal to the
44 region is only recognized if the CIST Root Identifier and External Root Path Cost of the CIST root priority
45 vector selected by the transmitting Bridge Port are equal to or worse than those selected by the receiver.
46 Updating of a CIST Designated Port's port priority vector with a worse CIST Root Identifier and External
47 Root Path Cost forces the port to discard frames for all MSTIs, thus initiating a Proposal that will elicit
48 agreement.
49

50 NOTE 2—MSTI Designated Ports are prompted to discard frames, as required above, as follows. The CIST Port
51 Information state machine sets sync for all MSTIs on a transition into the UPDATE state if updating the port priority with
52 the designated priority changes the Regional Root Identifier or replaces the CIST Root Identifier or External Path Cost
53 with a worse tuple. The MSTI's Port Role Transition machine acts on the sync, instructing the port to discard frames, and
54 setting synced and cancelling sync when the port is discarding or an agreement is received.

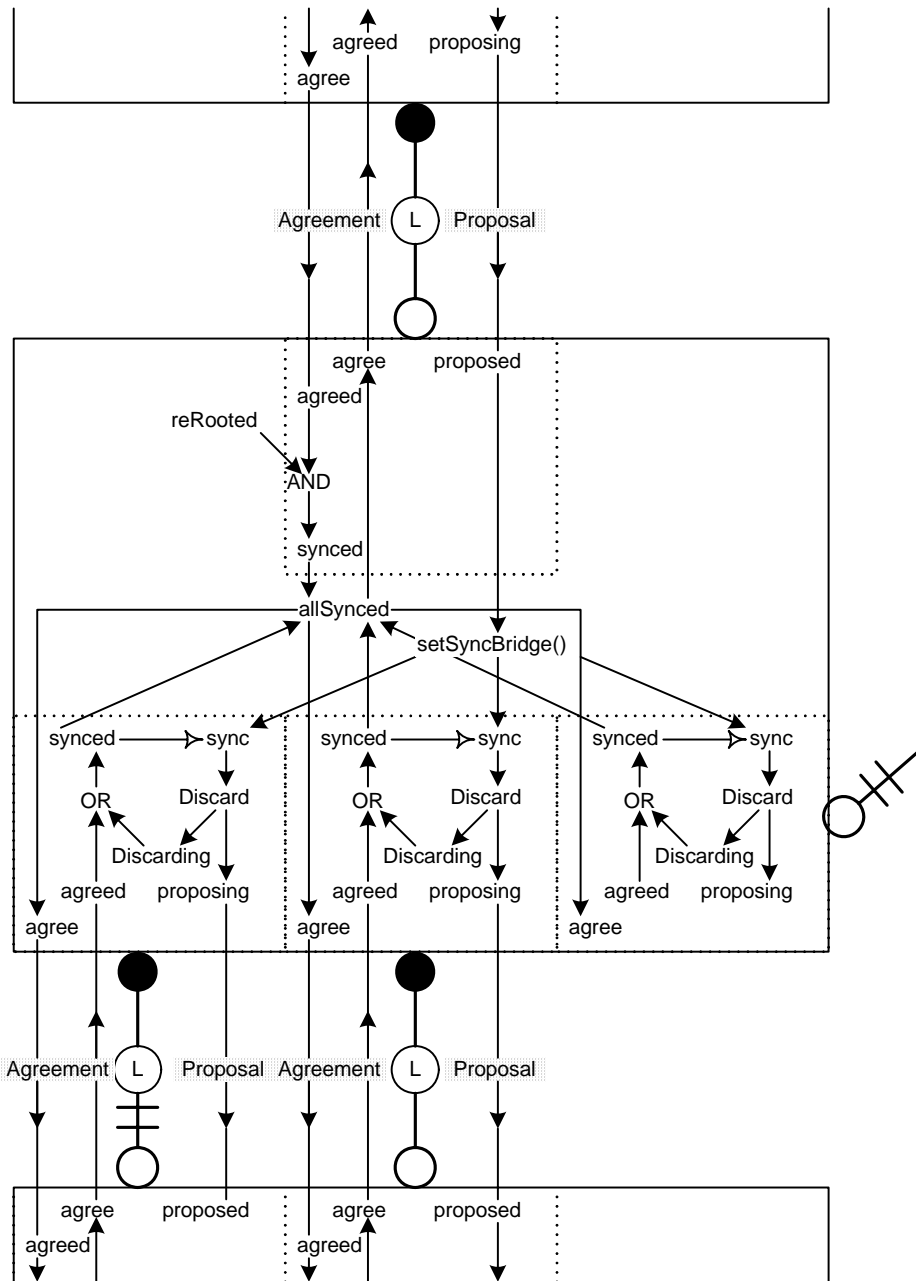


Figure 13-12—Enhanced Agreements

13.17 Changing Port States with SPB

While the link state routing protocols are less likely to create temporary loops than distance vector based protocols, loops are still possible if (for example) two links fail about the same time. Any potential loop is a serious problem for bridged networks, as a frame that is multicast or whose destination has not been learned and is travelling around a loop is copied to each of the connected subtrees on every circuit, consuming bandwidth throughout the network. Each SPT Bridge Port uses STP BPDUs to ensure that additions to each active topology do not occur unless there is sufficient agreement between neighbouring bridges (with some ports temporarily transitioned to Discarding if necessary) to ensure that a temporary loop will not be created.

Like RSTP and MSTP, agreements (see 13.16, Figure 13-12) are used to ensure that ports that transition to forwarding do not create loops. However, IS-IS distributes information in parallel with computation, rather than computing a new active topology hop-by-hop as priority vector information is passed from the Root Bridge to members of a potential subtree. Moreover the distribution path is not restricted to the potential subtree. Arbitrary distribution and parallel computation means that different bridges can complete topology calculations at quite different times, with two major consequences as follows.

First, each bridge is not necessarily aware of priority vector changes passed to any subtree connected through one of its Designated Ports before any other bridge in that subtree. A forwarding Designated Port on a given bridge can only provide connectivity to another bridge through the latter's Root Port, and a rapid transition to forwarding to provide new connectivity is only allowed if the Designated Port has received an agreement showing that the Root Port's *designated priority* is worse than its own. When RSTP (or MSTP) is used priority vectors propagate down the tree: so each bridge knows that its forwarding parents (connected through its Root Port) either have a better *designated priority* or have discarded any agreement previously received. None of those parents can therefore provide an agreement allowing rapid connectivity of their Root Port to the one of the given bridge's Designated Ports (potentially creating a loop) unless one of the Designated Ports between the parent and the given bridge becomes Discarding, allowing an agreement to be sent but interrupting the potential loop. When the CIST or an SPT is supported by ISIS-SPB, a Bridge Port needs to receive an explicit message from its neighbours discarding any outstanding agreement before it can start forwarding as a Designated Port or, if it is the Root Port, before the bridge's Designated Ports can use an improved designated priority to transition to forwarding. A given port cannot discard outstanding agreements until all the other ports of the bridge have either received suitable agreements or stopped forwarding, or until the given port itself is Discarding.

The second major consequence of arbitrary distribution and parallel computation, is that received Agreements that appear to contradict the results of the last local link state computation can become useful after a future computation completes. Agreements received after the last computation can be retained until they prove useful (following a further link state update) or are superseded by the receipt of BPDU containing a further agreement or a changed Port Role. The bridge transmitting the agreement will not create any connectivity that is inconsistent with the agreement until it has been explicitly discarded. For example, two Designated Ports attached to the same LAN cannot both transitioning to forwarding, each using an old Agreement with a Root Port role from the other. To minimize the number of BPDUs needed to create new connectivity, unsatisfactory received Agreements are voluntarily discarded when a link state topology calculation completes.

Agreements for the IST use CIST information present in both MST and SPT BPDUs, minimizing active topology disruption while allowing parallel adoption of a new topology by allowing neighbouring bridges to communicate IST priority vectors, propagate agreements, and signal the need for temporary cuts to speed transitions to forwarding, even while those neighbors' views of the entire active topology differ with differences in their knowledge of the latest physical topology changes. SPT BPDUs contain a two-bit Agreement Number and a Discarded Agreement Number, that supports the necessary communication, allowing for message loss and buffering prior to transmission and before receive processing. Once an Agreement has been sent it is considered *outstanding* until a matching or more recent Discarded Agreement Number is received.

1 A single BPDU cannot convey the same per tree state for all possible SPTs, so the input to their link state
2 calculation is summarized in a Agreement Digest (13.17.1). If a received digest matches the bridge's own
3 digest, the bridge can compute the implied received Agreements. SPT Agreements are outstanding until the
4 transmitting Bridge Port has received matching digests for a later calculation from all the other bridges
5 attached to the LAN. Using a digest means neighbouring bridges cannot synchronize their local views of any
6 SPT's active topology until they have synchronized their views of the physical topology of the entire SPT
7 Region, but reducing the number of messages is worthwhile.

8
9 NOTE 1—Management VLANs with modest bandwidth needs should be allocated to the IST in SPT Regions.

10
11 NOTE 2—Any two Agreement Digests representing the same physical topology will differ with high probability,
12 through inclusion of IS-IS sequence number in the digest calculation, if the physical topology changed in the period
13 between their generation, unless that period significantly exceeds any communication delays due to loss and buffering of
14 SPT BPDUs between nearest neighbors. Since a bridge only acts on received digests that match its own latest calculated
15 digest, all digests can be treated as ordered in time.

16 The per-port per-tree state machine variable `agreed` (see Figure 13-12) is recomputed after ISIS-SPB
17 completes a link state calculation, including the calculation of each port's designated priority vector, and
18 after each BPDU is received: `agreed` is TRUE if and only if the port is a Root or Alternate Port with no
19 outstanding agreements worse than its designated priority vector, or a Designated Port with no outstanding
20 agreements and a received agreement that is worse than its designated priority vector and any outstanding
21 agreement for the bridge's Root Port. As in Figure 13-12 each port is synced if it is either `agreed` or
22 `Discarding` for the tree, and `agree` is TRUE for a given port when all other ports are synced. Unused
23 outstanding agreements are discarded, by their recipient, only when `agree` is TRUE, since any continued
24 connectivity has to be supported by continued agreement if loops are to be prevented.

25
26 To avoid delays that might otherwise occur waiting for Agreements to percolate up the tree, `sync` is set for
27 all Designated Ports to force those that are not `agreed` to `Discarding`, so that the Root Port can transmit an
28 Agreement to its neighbour. However it is an implementation issue as to how long `sync` requires to take
29 effect, and the likelihood of receiving an Agreement from the Designated Port's neighbour before the port
30 can be transitioned to `Discarding` and then to `Forwarding` again can be taken into account. Each BPDU's
31 CIST Proposal flag should be set when a Designated Port is `Discarding`, thus providing a prompt for the
32 return of an Agreement just as described above (13.16) for RSTP and MSTP.

33
34 The Agreement Digest applies to all SPTs, both conveying new agreements and discarding those for prior
35 topologies. Since different trees will have different Root Ports (in the same bridge), if all bridges waited for
36 `agreed` to be set for all other ports for all other trees before transmitting a fresh digest the protocol would
37 deadlock. If the Root Port is not `agreed` but all other ports are synced, then `agree` is also set for any port that
38 is `Discarding`, thus avoiding the potential deadlock. When a link state computation completes, each bridge
39 transitions any Designated Port that is not `agreed` for an SPT to `Discarding` as rapidly as possible so that it
40 can send the fresh digest to its neighbours, and does attempt to optimise Port State transitions by waiting to
41 receive a matching digest.

42
43 NOTE 3—In all comparisons between SPT priority vectors, the specified comparisons take place within the CST
44 context, and `agreed` is only set if the CST Root and External Path Cost match exactly. This allow the Port Role Transition
45 state machine for the Master Port at the SPT Region boundary, where the IST and each SPT are connected into the CST,
46 to function just as for MSTP.

47 48 **13.17.1 Agreement Digest**

49
50 <<t.b.s. Should have format selector, like MST Configuration Digest.>>

13.18 Managing spanning tree topologies

The active topology of the CIST, and the topologies that can result after the failure or addition of network components, may be managed by assigning values to some or all of the following:

- The Bridge Priority component of the CIST Bridge Identifier for one or more bridges.
- The External Port Path Cost (also referred to as the Port Path Cost for RSTP) for some Bridge Ports.
- Components of the MST Configuration Identifier for bridges with the same Configuration Digest.
- The CIST Internal Port Path Cost Port (for MSTP and SPB protocols) for some Bridge Ports.
- The Port Priority component of the Port Identifier for some Bridge Ports.

Within an MST Region, the active topology of each MSTI may be managed by assigning values to some or all of the following:

- The Bridge Priority component of the MSTI Regional Root Identifier.
- The Internal Port Path Cost for the MSTI for some Bridge Ports,
- The Port Priority component of the MSTI's Port Identifier for some Bridge Ports.

In general topology management objectives can be met by modifying only a few parameter values in a few bridges in the network. Table 13-3 specifies default values and ranges for Bridge Priorities and Port Priorities. If these parameters can be updated by management, the bridge shall have the capability to use the full range of values with the granularity specified.

Table 13-3—Bridge and Port Priority values

Parameter	Recommended or default value	Range
Bridge Priority	32 768	0–61 440 in steps of 4096
Port Priority	128	0–240 in steps of 16

NOTE 1—The stated ranges and granularities for Bridge Priority and Port Priority differ from those in IEEE Std 802.1D, 1998 Edition and earlier revisions of that standard. Expressing these values in steps of 4096 and 16 allows consistent management of old and new implementations of this standard; the steps chosen ensure that bits that have been re-assigned are not modified, but priority values can be directly compared.

Table 13-4 recommends defaults and ranges for Port Path Cost and Internal Port Path Cost values, chosen according to the speed of the attached LAN, to minimize the administrative effort required to provide reasonable active topologies. If these values can be set by management, the bridge shall be able to use the full range of values in the parameter ranges specified, with a granularity of 1.

When two or more links are aggregated (see IEEE 802.1AX), Port Path Cost and Internal Port Path Cost values can be modified to reflect the actual throughput. However, as the primary purpose of Path Cost is to select active topologies, it can be inappropriate to track throughput too closely, as the resultant active topology could fluctuate or differ from that intended by the network administrator. For example, if the network administrator had chosen aggregated links for resilience (rather than for increased data rate), it would be inappropriate to change topology as a result of one of the links in an aggregation failing. Similarly, with links that can autonegotiate their data rate, reflecting such changes of data rate in changes to Path Cost is not necessarily appropriate. As a default behavior, dynamic changes of data rate should not automatically cause changes in Port Path Cost.

NOTE 2—BPDUs are capable of carrying 32 bits of Root Path Cost information, though IEEE Std 802.1D-1998 and its earlier revisions limited the range of the Port Path Cost parameter to a 16-bit unsigned integer value. Table 13-4 uses the full 32-bit range to extend the range of supported link speeds. Additional recommended values can be calculated as 20 000 000 000/(Link Speed in Kb/s). Limiting the range of the Path Cost parameter to 1–200 000 000 ensures that the accumulated Path Cost cannot exceed 32 bits over a concatenation of 20 hops. Where bridges using the IEEE Std

Table 13-4—Port Path Cost values

Link Speed	Recommended value	Recommended range	Range
<=100 Kb/s	200 000 000	20 000 000–200 000 000	1–200 000 000
1 Mb/s	20 000 000	2 000 000–200 000 000	1–200 000 000
10 Mb/s	2 000 000	200 000–20 000 000	1–200 000 000
100 Mb/s	200 000	20 000–2 000 000	1–200 000 000
1 Gb/s	20 000	2 000–200 000	1–200 000 000
10 Gb/s	2 000	200–20 000	1–200 000 000
100 Gb/s	200	20–2 000	1–200 000 000
1 Tb/s	20	2–200	1–200 000 000
10 Tb/s	2	1–20	1–200 000 000

802.1D-1998 recommendations and others using Table 13-4 are mixed in the same Bridged Local Area Network, explicit configuration is likely to be necessary to obtain reasonable CST topologies.

13.19 Updating learned station location information

In normal stable operation, learned station location information held in the Filtering Database need only change as a consequence of the physical relocation of stations. It is therefore desirable to employ a long aging time for Dynamic Filtering Entries (8.8.3), especially as many end stations transmit frames following power-up causing the information to be relearned.

However, when the active topology reconfigures, stations can appear to move from the point of view of any given bridge even if that bridge's Port States have not changed. If a Bridge Port is no longer part of an active topology, stations are no longer reachable through that port, and its Dynamic Filtering Entries are removed from that bridge's Filtering Database. Conversely, stations formerly reachable through other ports might be reachable through a newly active port. Dynamic Filtering Entries for the other ports are removed, and RSTP and MSTP transmit Topology Change Notification Messages both through the newly active Port and through the other active Ports on that Bridge. TCNs signal additional connectivity, not just changes in connectivity, as relearning a station's location is only possible if it can be reached, and if that is possible when a port is removed from the active topology another port will be added. A TCN is sent when a Bridge Port joins the active topology, and not before, so that bridges that can relearn removed station location information and minimize unnecessary flooding of frames. A bridge that receives a TCN on an active port removes Dynamic Filtering Entries for their other active Ports and propagates the TCN through those ports.

NOTE 1—STP allowed for the presence of LAN repeaters that could partition a shared media LAN, thus causing stations to appear to move when the partition was repaired later—with the only Bridge Port changing Port Role or Port State transitioning to Discarding at that time. This scenario does not occur with current technology, and its future likelihood does not justify the use of TCNs to signal connectivity loss. Bridge Ports that participate in the MAC status propagation protocol should be capable of originating TCNs when that protocol signals additional connectivity.

The Topology Change state machine (13.39) avoids removing learned information when ports temporarily revert to Discarding to suppress loops. It treats a port as joining the active topology when it becomes forwarding, and no longer active when it becomes an Alternate, Backup, or Disabled Port and stops forwarding and learning. TCNs are not generated following Edge Port (operEdge, 13.27.39) Port State changes, as these do not affect connectivity or station location information in the rest of the network, nor are Dynamic Filtering Entries for Edge Ports removed when TCNs are received.

Dynamic Filtering Entries for MAC addresses previously learned on a Root Port may be modified to move those addresses to an Alternate Port that becomes the new Root Port and a TCN sent only through the new

1 Root Port (and not through other active ports), reducing the need to flood frames. This optimization is
2 possible because a retiring Root Port that becomes Discarding temporarily partitions the active topology into
3 two subtrees, one including all bridges and LANs hitherto reachable through the retiring Root Port, and the
4 other including all the others. If the new Root Port simply provides a new path to the first of these subtrees,
5 its stations will not appear to move from the point of view of bridges in the other subtree. Alternatively if a
6 the tree reconfiguration is more complex one or more newly Designated Port will become active and will
7 transmit the necessary TCNs.
8

9 NOTE 2—The rules described require removal of potentially invalid learned information for a minimum set of ports on
10 each bridge. A bridge implementation can flush information from more ports than strictly necessary, removing (for
11 example) all Dynamic Filtering Entries rather than just those for the specified ports. This does not result in incorrect
12 operation, but will result in more flooding of frames with unknown destination addresses.
13

14 Changes in the active topology of any given MSTI or SPT do not change Dynamic Filtering Entries for the
15 CIST or any other MSTI or SPT, unless the underlying changes in the physical topology that gave rise to the
16 reconfiguration also cause those trees to reconfigure. Changes to the CST, i.e., the connectivity provided
17 between regions, can cause end station location changes for all trees. Changes to an IST can cause CST end
18 station location changes but do not affect MSTIs in that region unless those trees also reconfigure.
19

20 On receipt of a CIST TCN Message from a Bridge Port not internal to the region, or on a change in Port Role
21 for a Bridge Port at the region boundary, TCN Messages are transmitted through each of the other ports of
22 the receiving bridge for each MSTI and the Dynamic Filtering Entries for those ports are removed.
23

24 NOTE 3—The port receiving the CIST TCN Message can be a Master Port, a Designated Port attached to the same LAN
25 as an STP bridge, or a Designated Port attached to the same LAN as the Root Ports of bridges in other regions.
26

27 TCN Messages for the CIST are always encoded in the same way, irrespective of whether they are perceived
28 to have originated from topology changes internal to the region or outside it. This allows RSTP Bridges
29 whose Root Ports attach to a LAN within an MST Region to receive these TCN Messages correctly.
30

31
32 Since each SPT is rooted at the source of the frames assigned to that SPT, or at the point where those frames
33 enter the SPT Region, entries are only learnt for the Root Port of an SPT. Any apparent changes in station
34 location due to changes in an SPT's active topology only occur when a bridge changes the Root Port for that
35 SPT, and are accomodated by removing the Dynamic Filtering Entries for the prior Root Port and FID
36 associated with the SPT Set. If the same new Root Port is chosen for all SPTs, in the SPT set, with that prior
37 Root Port, the entries can be moved to the new Root Port rather than simply being deleted.
38

39 NOTE 5—Dynamic Filtering Entries created by ISIS-SPB as a result of that protocol's direct knowledge of the location
40 of some stations are not removed when a TCN is received, but can be changed by ISIS-SPB as result of its calculations.
41

42 NOTE 6—Topology changes for the IST are always propagated by TCNs received and transmitted in BPDUs, and are
43 not injected as a result of ISIS-SPB calculations as the latter complete prior to new connectivity being established.
44

45 46 **13.20 Managing reconfiguration**

47
48 <<Place-holder, will be required long term so creating now so other subclause numbers can remain stable.>>
49

50
51 <<In particular the description and operation of L2GP: (a) needs to be accurate in all respects; (b) could be
52 useful in more than just the original intended use; and (c) could be expressed rather more simply in the state
53 machines. This subclause is probably the right place to put the updated concepts. Other things that belong in
54 this cause include choice of port path costs to enable rapid failover, and the use of restrictedRoot and
restrictedTcn to speed reconfiguration and remove unwanted side effects.>>

13.21 Partial and disputed connectivity

It is possible for the connectivity between Bridge Port attached to the same LAN to fail, in system or media access method dependent ways, so that BPDUs and data frames are transmitted in one direction only. As a result it is possible for more than one port attached to the same LAN to believe itself to be the Designated Port. To ensure that the active topology remains loop-free, a Designated Port will recognise that a dispute is in progress and stop learning from or forwarding frames, if it receives a BPDU with a worse message priority and the Learning or Forwarding flag set from another port that claims to be Designated.

If two (Designated) ports attached to the same shared media LAN cannot communicate with each other at all, but can each communicate with a third (Root) port, a potential loop exists if one of the Designated Ports has a priority vector that is worse than that of the Root Port. To ensure that such loop does not occur, a Root Port that receives an inferior message from a Designated Port detects a dispute if the Learning or Forwarding flag is set, and transitions to Discarding.

13.22 In-service upgrades

It can be desirable to upgrade the control plane software of a bridging system, without interrupting existing data connectivity, while the Spanning Tree Protocol Entity is not operating. This can be done, without the risk of creating data loops, providing that the other bridges in the network are suitably configured. However the failure of a network component (bridge or LAN) while the upgrade is in progress can result in a loss of connectivity, as the ways in which the network can reconfigure are restricted. This clause (13.22) describes the necessary configuration of the other bridges in the network; the behavior of the upgrading system is assumed to be system dependent and is not specified in detail, except as follows:

- a) Frames can be received from and transmitted to ports that were forwarding prior to beginning the upgrade, and are not forwarded to or from any other port.
- b) Frames received on ports that were learning prior to beginning the upgrade can be submitted to the Learning Process, while frames received on other ports are not.
- c) BPDUs are not transmitted, and received BPDUs are discarded, while the upgrade is in progress.
- d) If there is to be no interruption in connectivity when the upgrade is complete, the parameters of BPDUs received prior to beginning the upgrade are retained, or recovered using ISIS-SPB.

NOTE—If received BPDU information is not retained, the spanning tree protocol variables and state machines are re-initialised by asserting BEGIN, and there will be a brief interruption in connectivity.

The need for a control plane software upgrade can result from the need to change any component of that software, and rarely from upgrades to the Spanning Tree Protocol Entity itself. The in-service upgrade procedures described here depend on the operation of specifically identified features of the RSTP, MSTP, and SPB protocols specified in this standard (Clause 13), and do not ensure loop-free operation if the necessary criteria are not met by all bridges in the network. In particular safe upgrades are not supported in networks including bridges operating STP as specified in the IEEE Std 802.1D-1998 and earlier revisions. It is essential for the network administrator to base-line the network, i.e. verify its configuration and the configuration of its components, prior to attempting an in-service upgrade. It is recommended that a single system be upgraded at a time, and its subsequent correct operation verified prior to making further changes.

If all the LANs that connect the bridges in the network provide point-to-point connectivity, connecting at most two bridges, and each Bridge Port thus connecting to another bridge meets the following conditions:

- e) operPointToPointMAC (13.28.15) is TRUE; and
- f) operEdge (13.27.39) is FALSE;

NOTE 2—Apart from the requirement for a point-to-point physical topology, these conditions can be ensured by setting adminPointToPointMAC (6.6.3) TRUE, and both AdminEdge and AutoEdge FALSE.

1 then a Designated Port will not transition from Discarding to Learning or Forwarding without receiving an
2 Agreement from its immediate neighbour (see 13.37). This prevents the introduction of data loops while one
3 or more bridges are being upgraded, even if other bridges or LANs fail or are added to the network. To
4 prevent existing connectivity being disrupted (provided no other network additions or failures occur) the
5 following are also necessary:

- 6
- 7 g) Prior to the upgrade, each of the upgrading bridge's immediately neighbouring ports that is a Root
8 Port (for a given tree) has to be configured as an Layer 2 Gateway Port (<>) (for that tree), with the
9 same pseudo info that it was previously receiving from the upgrading bridge.
 - 10 h) After the upgrade, each of the ports thus temporarily configured as an Layer 2 Gateway Port needs
11 to have its normal configuration restored.
- 12

13 NOTE 3—If the upgrading bridge is capable of sending periodic 'canned BPDUs' containing the same
14 information as immediately prior to the upgrade, there is no requirement for neighbour L2GP configuration, or
15 for the point-to-point and operEdge conditions. Attempts by neighbouring bridges to operate outside the
16 parameters dictated by the 'canned BPDUs' will result in disputes, preventing new connectivity.

17 13.23 Fragile bridges

18
19
20 Some, non-conformant, bridging systems are known to be 'fragile', i.e. they can suffer from unpredictable
21 interruptions to Spanning Tree Protocol Entity operation and will forward data frames while no longer
22 sending or receiving BPDUs, on some or all ports. If the spanning tree protocol implementations of the other
23 bridges in the network conform to prior revisions of this standard and IEEE Std 802.1D, these interruptions
24 can result data loops even in networks of point-to-point LANs. This revision of this standard allows a Bridge
25 Port attached to point-to-point LAN to ensure that its neighbour remains capable of receiving and
26 transmitting BPDUs, even if that neighbour's RSTP or MSTP implementation conforms to a prior revision
27 of this standard, and to block connectivity (by transitioning to Discarding) otherwise. The CIST Proposal
28 flag is set in all BPDUs transmitted by a Designated Port, and used to solicit an Agreement from the
29 neighbour (which might otherwise not transmit). This capability is disabled by default, to allow for in-
30 service upgrades, and is only effective if the neighbouring bridge is capable of RSTP or MSTP operation.

31
32 NOTE—This revision of this standard requires a point-to-point connected Designated Port that is not an operEdge to
33 receive an Agreement to transition to Forwarding (see 13.22).

34
35
36
37
38
39
40
41
42
43
44
45
46
47
48
49
50
51
52
53
54

13.24 Spanning tree protocol state machines

Each Spanning Tree Protocol Entity's operation of the protocols specified in this clause (Clause 13) is specified by the following state machines:

- a) Port Role Selection (PRS, 13.36)

with the following state machines for each Bridge Port:

- b) Port Timers (PTI, 13.30)
- c) Port Protocol Migration (PPM, 13.32)
- d) Port Receive (PRX, 13.31)
- e) Port Transmit (PRT, 13.34)
- f) Bridge Detection (BDM, 13.33)

and the following optional state machine for each Bridge Port:

- g) Layer 2 Gateway Port Receive (L2GPRX, 13.40)

and the following state machines for each Bridge Port for the CIST and for each MSTI:

- h) Port Information (PIM, 13.35)
- i) Topology Change (TCM, 13.39)

and the following state machines for each Bridge Port for the CIST, for each MSTI, and for each SPT:

- j) Port Role Transitions (PRT, 13.37)
- k) Port State Transition (PST, 13.38)

Each state machine and its associated variable and procedural definitions is specified in detail in 13.25 through 13.40. The state machine notation is specified in *Annex P*. Figure 13-13 is not itself a state machine but provides an overview of the state machines, their state variables, and communication between machines. Figure 13-14 describes its notation.

<<The description and operation of L2GP is still unsatisfactory, and the set of fixes suggested along with the interpretation request on 802.1ah could be improved upon and simplified further, while meeting all the achievable L2GP goals (which turned out to be more extensive than those that led to the choice of the L2GPRX state machine to support the capability). In particular the pseudoRootID's could be considered directly by the Port Role Selection machine, and extensions to the dispute procedure (see editor's note to 13.21 Partial and disputed connectivity) used to trigger the necessary blocking. This would reduce the number of moving parts, removing the need for the L2GPRX machine entirely. Pending inclusion of all the necessary changes the state machine overview diagram (Figure 13-13) has not been revised to include all the SPB variables.>>

NOTATION:

Variables are shown both within the machine where they are principally used and between machines where they are used to communicate information. In the latter case they are shown with a variety of arrow styles, running from one machine to another, that provide an overview of how the variables are typically used:

→ Not changed by the target machine. Where the state machines are both per Port, this variable communicates between machine instances for the same port.

▷ Set (or cleared) by the originating machine, cleared (or set) by the target machine. Where the state machines are both per Port, this variable communicates between machine instances for the same port.

→▷ As above except that the originating per port machine instance communicates with multiple port machine instances (by setting or clearing variables owned by those Ports).

↗ As above except that multiple per Port instances communicate with (an)other instance(s) (by setting or clearing variables owned by the originating Ports).

ABBREVIATIONS:

BDM:	Bridge Detection Machine
PIM:	Port Information Machine
PPM:	Port Protocol Migration Machine
PRS:	Port Role Selection Machine
PRT:	Port Role Transitions Machine
PRX:	Port Receive Machine
PST:	Port State Transitions Machine
PTI:	Port Timers Machine
PTX:	Port Transmit Machine
TCM:	Topology Change Machine

Figure 13-14—MSTP overview notation**13.25 State machine timers**

The timer variables declared in this subclause are part of the specification. The accompanying descriptions are provided to aid in the comprehension of the protocol only, and are not part of the specification. Each timer variable represents an integral number of seconds before timer expiry.

One instance of the following shall be implemented per-port:

- a) edgeDelayWhile (13.25.1)
- b) helloWhen (13.25.3)
- c) mdelayWhile (13.25.4)

One instance of the following shall be implemented per-port when L2GP functionality is provided:

- d) pseudoInfoHelloWhen (13.25.10)

One instance per-port of the following shall be implemented for the CIST and one per-port for each MSTI:

- e) fdWhile (13.25.2)
- f) rrWhile (13.25.7)
- g) rbWhile (13.25.5)
- h) tcWhile (13.25.9)
- i) rcvdInfoWhile (13.25.6)
- j) tcDetected. (13.25.8)

Table 13-5 specifies values and ranges for the initial values of timers and for transmission rate limiting performance parameters. Default values are specified to avoid the need to set values prior to operation in most cases, and are widely applicable to networks using the spanning tree protocols specified in this standard. The table recommends Bridge Hello Time, Bridge Max Age, and Bridge Forward Delay values that maximise interoperability in networks that include bridges using STP as specified in IEEE Std 802.1D-1998. Ranges are specified to ensure that the protocols operate correctly.

Table 13-5—Timer and related parameter values

Parameter	Default	Permitted Range	Interoperability recommendations
Migrate Time	3.0	— ^a	— ^a
Hello Time	2.0	— ^a	— ^a
Bridge Max Age	20.0	6.0–40.0	20.0
Bridge Forward Delay	15.0	4.0–30.0	15.0
Transmit Hold Count	6	1–10	6
Max Hops	20	6–40	—

All times are in seconds. —^a Not applicable, value is fixed.

NOTE—Changes to Bridge Forward Delay do not affect reconfiguration times, unless the network includes bridges that do not conform to this revision of this standard. Changes to Bridge Max Age can have an effect, as it is possible for old information to persist in loops in the physical topology for a number of “hops” equal to the value of Max Age in seconds, and thus exhaust the Transmit Hold Count in small loops.

Bridge Max Age, Bridge Forward Delay, and Transmit Hold Count may be set by management, if this capability is provided the bridge shall have the capability to use the full range of values in the parameter ranges specified in the Permitted Range column of Table 13-5, with a timer resolution of r seconds, where $0 < r \leq 1$. To support interoperability with previous revisions of this standard and IEEE Std 802.1D, a bridge shall enforce the following relationships:

$$2 \times (\text{Bridge_Forward_Delay} - 1.0 \text{ seconds}) \geq \text{Bridge_Max_Age}$$

$$\text{Bridge_Max_Age} \geq 2 \times (\text{Bridge_Hello_Time} + 1.0 \text{ seconds})$$

13.25.1 edgeDelayWhile

The Edge Delay timer. The time remaining, in the absence of a received BPDU, before this port is identified as an operEdgePort.

13.25.2 fdWhile

The Forward Delay timer. Used to delay Port State transitions until other Bridges have received spanning tree information.

13.25.3 helloWhen

The Hello timer. Used to ensure that at least one BPDU is transmitted by a Designated Port in each HelloTime period.

13.25.4 mdelayWhile

The Migration Delay timer. Used by the Port Protocol Migration state machine to allow time for another RSTP Bridge on the same LAN to synchronize its migration state with this Port before the receipt of a BPDU can cause this Port to change the BPDU types it transmits. Initialized to MigrateTime (13.26.6).

13.25.5 rbWhile

The Recent Backup timer. Maintained at its initial value, twice HelloTime, while the Port is a Backup Port.

13.25.6 rcvdInfoWhile

The Received Info timer. The time remaining before information, i.e. portPriority (13.27.43) and portTimes (13.27.44), received in a Configuration Message is aged out if a further message is not received.

13.25.7 rrWhile

The Recent Root timer.

13.25.8 tcDetected

The Topology Change timer for MRP application usage. 'New' messages are sent while this timer is running (see 10.2).

13.25.9 tcWhile

The Topology Change timer. TCN Messages are sent while this timer is running.

13.25.10 pseudoInfoHelloWhen

The Pseudo Info Hello When timer. Used to ensure that at least one Pseudo Info BPDU is presented to the spanning tree (as if it had been received on the physical port on which preparePseudoInfo() was invoked) by a Layer Two Gateway Port in a designated role in each HelloTime period.

13.26 Per-bridge variables

The variables declared in this clause (13.26) are part of the specification. The accompanying descriptions are provided to aid in the comprehension of the protocol only, and are not part of the specification.

There is one instance per-bridge component of the following variable(s):

- a) ForceProtocolVersion (13.7.2)
- b) TxHoldCount (13.26.11)
- c) MigrateTime (13.26.6)

One instance of the following shall be implemented per-bridge component if MSTP or SPB protocols are implemented:

- d) MstConfigId (13.26.7)

The above parameters ((a) through (d)) are not modified by the operation of the spanning tree protocols, but are treated as constants by the state machines. If ForceProtocolVersion or MstConfigId are modified by management, BEGIN shall be asserted for all state machines.

There is one instance per-bridge of each of the following for the CIST, and one for each MSTI.

- e) BridgeIdentifier (13.26.2)
- f) BridgePriority (13.26.3)
- g) BridgeTimes (13.26.4)

- h) rootPortId (13.26.8)
- i) rootPriority (13.26.9)
- j) rootTimes (13.26.10)

BridgeIdentifier, BridgePriority, and BridgeTimes are not modified by the operation of the spanning tree protocols but are treated as constants by the state machines. If they are modified by management, spanning tree priority vectors and Port Role assignments for shall be recomputed, as specified by the operation of the Port Role Selection state machine (13.36) by clearing selected (13.27) and setting reselect (13.27) for all Bridge Port(s) for the relevant MSTI and for all trees if the CIST parameter is changed.

If the SPB protocols are implemented there is one instance per-bridge component, of the following variable(s), with that single instance supporting all SPTs:

- k) agreementDigest (13.26.1)

13.26.1 agreementDigest

The Agreement Digest calculated by ISIS-SPB, and updated with other calculated parameters (see 13.36).

<<It would be equally possible to calculate the digest independently of IS-IS operation, using only the parameters specified in this clause (13), by using a different digest for each LAN. The input data to the digest could comprise the concatenation of the Designated Bridge's Bridge Identifier and designated priority (a total of 12 octets) for the CIST and for each SPT, with the latter ordered by Root Identifier. This would form an input string of less than 60,000 octets for a maximally sized network. A suitable digest function would be a CRC of length 128.>>

13.26.2 BridgeIdentifier

The unique Bridge Identifier assigned to this bridge for this tree (CIST or MSTI).

The 12-bit system ID extension component of a Bridge Identifier (9.2.5 of IEEE Std 802.1D) shall be set to zero for the CIST, and to the value of the MSTID for an MSTI, thus allocating distinct Bridge Identifiers to the CIST and each MSTI—all based on the use of a single Bridge Address component value for the MST Bridge as a whole.

NOTE—This convention is used to convey the MSTID for each MSTI Configuration Message in an MST BPDU.

The four most significant bits of the Bridge Identifier (the settable Priority component) for the CIST and for each MSTI can be modified independently of the setting of those bits for all other trees, as a part of allowing full and independent configuration control to be exerted over each Spanning Tree instance.

13.26.3 BridgePriority

For the CIST, the value of the CIST bridge priority vector, as defined in 13.10. The CIST Root Identifier, CIST Regional Root Identifier, and Designated Bridge Identifier components are all equal to the value of the CIST Bridge Identifier. The remaining components (External Root Path Cost, Internal Root Path Cost, and Designated Port Identifier) are set to zero.

For a given MSTI, the value of the MSTI bridge priority vector, as defined in 13.11. The MSTI Regional Root Identifier and Designated Bridge Identifier components are equal to the value of the MSTI Bridge Identifier (13.26.2). The remaining components (MSTI Internal Root Path Cost, Designated Port Identifier) are set to zero.

BridgePriority is used by updRolesTree() in determining the value of the rootPriority variable (see 13.26.9).

13.26.4 BridgeTimes

For the CIST, BridgeTimes comprises:

- a) The current values of Bridge Forward Delay and Bridge Max Age (13.25, Table 13-5).
- b) A Message Age value of zero.
- c) The current value of Max Hops (13.26.4). This parameter value is determined only by management.

For a given MSTI, BridgeTimes comprises:

- d) The current value of MaxHops (Max Hops in Table 13-5), the initial value of remainingHops for MSTI information generated at the boundary of an MSTI region (see 13.26.10).

BridgeTimes is used by updRolesTree() in determining the value of the rootTimes variable (13.26.10).

13.26.5 ForceProtocolVersion

The Force Protocol Version parameter for the Bridge (13.7.2).

13.26.6 MigrateTime

The value of the Migrate Time parameter as specified in Table 13-5. This value shall not be changed.

13.26.7 MstConfigId

The current value of the bridge's MST Configuration Identifier (13.8). Changes in this parameter cause BEGIN to be asserted for the state machines for the bridge, for all trees, and for each port.

13.26.8 rootPortId

For the CIST, the Port Identifier of the Root Port, and a component of the CIST root priority vector (13.10).

For a given MSTI, the Port Identifier of the Root Port, and a component of the MSTI root priority vector (13.11).

13.26.9 rootPriority

For the CIST: the Root Identifier, External Root Path Cost, Regional Root Identifier, Internal Root Path Cost, Designated Bridge Identifier, and Designated Port Identifier components of the bridge's CIST root priority vector (13.10).

For a given MSTI: the MSTI Regional Root Identifier, Internal Root Path Cost, Designated Bridge Identifier, and Designated Port Identifier components of the bridge's MSTI root priority vector (13.11).

13.26.10 rootTimes

For the CIST, the Bridge's timer parameter values (Message Age, Max Age, Forward Delay, and remainingHops). The values of these timers are derived (see 13.29.33) from the values stored in the CIST's portTimes parameter (13.27.44) for the Root Port or from BridgeTimes (13.26.4).

For a given MSTI, the value of remainingHops derived (13.29.33) from the value stored in the MSTI's portTimes parameter (13.27.44) for the Root Port or from BridgeTimes (13.26.4).

13.26.11 TxHoldCount

The value of Transmit Hold Count (Table 13-5) for the bridge. If this is modified, the value of txCount (13.27) for all ports shall be set to zero.

13.27 Per-port variables

The variables declared in this clause (13.27) are part of the specification. The accompanying descriptions are provided to aid in the comprehension of the protocol only, and are not part of the specification.

There is one instance per port of each of the following variables:

- a) AdminEdge (13.27.1)
- b) ageingTime (13.27.2)
- c) AutoEdge (13.27.13)
- d) AutoIsolate (13.27.14)
- e) enableBPDUrx (13.29)
- f) enableBPDUtx (13.27.19)
- g) isL2gp (13.27.21)
- h) isolate (13.27.22)
- i) mcheck (13.27.33)
- j) newInfo (13.27.37)
- k) operEdge (13.27.39)
- l) portEnabled (13.27.40)
- m) portHelloTime (13.27.41)
- n) rcvdBpdu (13.27.48)
- o) rcvdRSTP (13.27.52)
- p) rcvdSTP (13.27.53)
- q) rcvdTcAck (13.27.55)
- r) rcvdTcn (13.27.56)
- s) restrictedRole (13.28.23)
- t) restrictedTcn (13.27.60)
- u) sendRSTP (13.27.64)
- v) tcAck (13.27.64)
- w) tick (13.27.69)
- x) txCount (13.27.70)

If MSTP or the SPB protocols are implemented there is one instance per-port, applicable to the CIST and to all MSTIs and SPTs, of the following variable(s):

- y) rcvdInternal (13.27.50)

If MSTP or the SPB protocols are implemented there is one instance per-port of each of the following variables for the CIST:

- z) ExternalPortPathCost ()
- aa) infoInternal (13.27.26)
- ab) master (13.27.31)
- ac) mastered (13.27.32)

A single per-port instance of the following variable(s) applies to all MSTIs:

- ad) newInfoMsti (13.27.38)

1 If the SPB protocols are implemented there is one instance per-port, of the following variable(s) for the
2 CIST:

- 3
- 4 ae) agreedN (13.27.7)
- 5 af) agreedND (13.27.8)
- 6 ag) agreeN (13.27.10)
- 7 ah) agreeND (13.27.11)
- 8 ai) agreePending (13.27.12)
- 9

10 If the SPB protocols are implemented there is one instance per-port, of the following variable(s), with that
11 single instance supporting all SPTs:

- 12
- 13 aj) agreedDigest (13.27.5)
- 14 ak) agreeDigest (13.27.6)
- 15

16 There is one instance per-port of each of the following variables for the CIST, one per-port for each MSTI,
17 and one per-port for each SPT:

- 18
- 19 al) agree (13.27.3)
- 20 am) agreed (13.27.4)
- 21 an) designatedPriority (13.27.15)
- 22 ao) designatedTimes (13.27.16)
- 23 ap) disputed (13.27.17)
- 24 aq) fdbFlush (13.27.23)
- 25 ar) forward (13.27.24)
- 26 as) forwarding (13.27.25)
- 27 at) infols (13.27.27)
- 28 au) InternalPortPathCost ()
- 29 av) learn (13.27.29)
- 30 aw) learning (13.27.23)
- 31 ax) msgPriority (13.27.34)
- 32 ay) msgTimes (13.27.35)
- 33 az) portId (13.27.42)
- 34 ba) portPriority (13.27.43)
- 35 bb) portTimes (13.27.44)
- 36 bc) proposed (13.27.45)
- 37 bd) proposing (13.27.46)
- 38 be) pseudoRootId (13.29)
- 39 bf) rcvdInfo (13.27.49)
- 40 bg) rcvdMsg (13.27.51)
- 41 bh) rcvdTc (13.27.54)
- 42 bi) reRoot (13.27.57)
- 43 bj) reselect (13.27.57)
- 44 bk) role (13.27.61)
- 45 bl) selected (13.27.62)
- 46 bm) selectedRole (13.27.63)
- 47 bn) sync (13.27.65)
- 48 bo) synced (13.27.66)
- 49 bp) tcProp (13.27.68)
- 50 bq) updtInfo (13.27.71)
- 51
- 52

53 If the SPB protocols are implemented there is one instance per-port, of the following variable(s) for the
54 CIST and one per-port for each SPT:

1 br) agreementOutstanding (13.27.9)

2
3 If the SPB protocols are implemented there is one instance per-port of the following variables for each SPT:

4
5 bs) neighbourPriority (13.27.36)

6
7 **13.27.1 AdminEdge**

8
9 A Boolean. Set by management if the port is to be identified as operEdge immediately on initialization,
10 without a delay to detect other bridges attached to the LAN. The recommended default value is FALSE.

11
12 **13.27.2 ageingTime**

13
14 Filtering database entries for this Port are aged out after ageingTime has elapsed since they were first created
15 or refreshed by the Learning Process. The value of this parameter is normally Ageing Time (8.8.3, Table 8-
16 4), and is changed to FwdDelay (13.28.9) for a period of FwdDelay after fdbFlush (13.27.23) is set by the
17 topology change state machine if stpVersion (13.28.22) is TRUE.

18
19 **13.27.3 agree**

20 A Boolean. See 13.16.

21
22 **13.27.4 agreed**

23
24 A Boolean. Indicates that a Configuration Message has been received from another bridge attached to the
25 same LAN indicating Agreement that all Port States for the given tree of all other bridges attached to the
26 same LAN as this port are known to be likewise compatible with a loop free active topology determined by
27 this bridge's priority vectors and, in the absence of further communication with this bridge, will remain
28 compatible within the design probabilities of protocol failure due to repeated BPDU loss (13.16, 13.24).

29
30
31 **13.27.5 agreedDigest**

32 The Agreement Digest conveyed in the last BPDU received, if the port is internal to an SPT Region.

33
34 **13.27.6 agreeDigest**

35 The Agreement Digest currently encoded in SPT BPDUs transmitted from the port.

36
37 **13.27.7 agreedN**

38 The Agreement Number associated with the last BPDU received, if the port is within an SPT Region.

39 The variables agreedN, agreedND, agreeN, and agreeND are encoded in two-bit fields in BPDUs. They take
40 values 0, 1, 2, or 3, and all arithmetic using these variables is modulo 4, e.g. $1 + 1 = 2$, $3 + 1 = 0$, $0 - 1 = 3$.

41
42 **13.27.8 agreedND**

43 The Discarded Agreement Number (see 13.17) to be included in SPT BPDUs transmitted from the port.

44
45 **13.27.9 agreementOutstanding**

46
47 The priority vector for the worst priority associated with outstanding Agreements made by a CIST or SPT
48 Root Port, Alternate Port, or Backup Port within an SPT Region. in SPT BPDUs. When an SPT BPDU, from
49 the same SPT Region, is received with a Discarded Agreement Number that is the immediate precursor of
50
51
52
53
54

1 the current agreeN (13.27.10), the CIST's agreementOutstanding is set to the port's designatedPriority. On
2 reception of a BPDU that is either not an SPT BPDU or is from a different SPT Region, the agreeND
3 (13.27.11) is set to the value of the agreeN (13.27.10), so there is no outstanding Agreement.

4 5 **13.27.10 agreeN**

6
7 The Agreement Number (see 13.17) transmitted in SPT BPDUs.

8 9 **13.27.11 agreeND**

10
11 The last Discarded Agreement Number (see 13.17) received in an SPT BPDU. If agreeND matches agreeN,
12 there is no outstanding agreement.

13 14 **13.27.12 agreePending**

15
16 A Boolean. TRUE if an Agreement could not be transmitted, because the next (in circular sequence)
17 Agreement Number is the current value of agreeND.

18 19 **13.27.13 AutoEdge**

20
21 A Boolean. Set by management if the bridge detection state machine (BDM, 13.33) is to detect other bridges
22 attached to the LAN, and set operEdge automatically. The recommended default is TRUE.

23 24 **13.27.14 AutoIsolate**

25
26 A Boolean. Set by management if isolate (13.27.22) is to be set, causing a Designated Port to transition to
27 Discarding if both AdminEdge (13.27.1) and AutoEdge (13.27.13) are FALSE and the other bridge presumed
28 to be attached to the same LAN does not transmit periodic BPDUs—either as a Designated Port or in
29 response to BPDUs with the Proposal flag set (see 13.23). The recommended default of this parameter is
30 FALSE. AdminEdge and AutoEdge are both reset only on ports that are known to connect to other bridges.

31 32 **13.27.15 designatedPriority**

33
34 For the CIST and a given port, the CIST Root Identifier, External Root Path Cost, Regional Root Identifier,
35 Internal Root Path Cost, Designated Bridge Identifier, and Designated Port Identifier components of the
36 port's CIST designated priority vector, as defined in 13.10.

37
38 For a given MSTI and port, the Regional Root Identifier, Internal Root Path Cost, Designated Bridge
39 Identifier, and Designated Port Identifier components of the designated priority vector, as defined in 13.11.

40 41 **13.27.16 designatedTimes**

42
43 For the CIST and a given port, the set of timer parameter values (Message Age, Max Age, Forward Delay,
44 and remainingHops) that are used to update Port Times when updtInfo is set. These timer parameter values
45 are used in BPDUs transmitted from the port. The value of designatedTimes is copied from the CIST
46 rootTimes Parameter (13.26.10) by the operation of the updtRolesTree() procedure.

47
48 For a given MSTI and port, the value of remainingHops used to update this MSTI's portTimes parameter
49 when updtInfo is set. This timer parameter value is used in BPDUs transmitted from the port. The
50 updtRolesTree() procedure (13.29.33) copies designatedTimes from the MSTI's rootTimes (13.26.10).

51 52 **13.27.17 disputed**

53
54 A Boolean. See 13.21 and 13.29.17.

1 **13.27.18 enableBPDURx**

2
3 A Boolean. This per port management parameter is set by default, and should not be clear unless the port is
4 configured as a Layer Two Gateway Port (i.e. isL2gp is set). When clear it can allow loops to be created, or
5 can result in no connectivity. When cleared, BPDUs received on the port are discarded and not processed.

6
7 **13.27.19 enableBPDUtx**

8
9 A Boolean. This per port management parameter is set by default, and should not be clear unless the port is
10 configured as a Layer Two Gateway Port (i.e. isL2gp is set). When clear it can allow loops to be created, or
11 can result in no connectivity. When cleared, BPDUs received on the port are discarded and not processed.

12
13 **13.27.20 ExternalPortPathCost**

14
15 The port's contribution, when it is the CIST Master Port (for MSTP and SPB protocols) or the CST Root
16 Port (for RSTP), to the External Root Path Cost (13.9) for the bridge.

17
18 **13.27.21 isL2gp**

19
20 A Boolean. Set by management to identify a port functioning as a Layer Two Gateway Port. This parameter
21 is set to FALSE by default. When set, enableBPDUtx should be cleared.

22
23 **13.27.22 isolate**

24
25 A Boolean. Set by the bridge detection state machine (BDM, 13.33) when the Spanning Tree Protocol Entity
26 of a neighbouring bridge has apparently failed (see 13.23, 13.27.14).

27
28 **13.27.23 fdbFlush**

29
30 A Boolean. Set by the topology change state machine to instruct the filtering database to remove entries for
31 this port, immediately if rstpVersion (17.20.9 of IEEE Std 802.1D) is TRUE, or by rapid ageing (17.19.1 of
32 IEEE Std 802.1D) if stpVersion (17.20.10 of IEEE Std 802.1D) is TRUE. Reset by the filtering database
33 once the entries are removed if rstpVersion is TRUE, and immediately if stpVersion is TRUE. Setting the
34 fdbFlush variable does not result in removal of filtering database entries in the case that the port is an Edge
35 Port (i.e., operEdge is TRUE). The filtering database removes entries only for those VLANs that have a
36 fixed registration (see 10.7.2) on any port of the bridge that is not an Edge Port.

37
38 NOTE—If MVRP is in use, the topology change notification and flushing mechanisms defined in MRP (Clause 10) and
39 MVRP (11.2.5) are responsible for filtering entries in the Filtering Database for VLANs that are dynamically registered
40 using MVRP (i.e., for which there is no fixed registration in the bridge on non-Edge Ports).

41
42 **13.27.24 forward**

43
44 A Boolean. See 13.38.

45
46 **13.27.25 forwarding**

47
48 A Boolean. See 13.38.

49
50 **13.27.26 infoInternal**

51
52 If infoInternal is Received, indicating that the port has received current information from the Designated Bridge for
53 the attached LAN, infoInternal is set if that Designated Bridge is in the same MST Region as the receiving
54 bridge and reset otherwise.

13.27.27 infols

A variable that takes the values Mine, Aged, Received, or Disabled, to indicate the origin/state of the Port's Spanning Tree information (portInfo) held for the Port, as follows:

- a) If infols is Received, the port has received current (not aged out) information from the Designated Bridge for the attached LAN (a point-to-point bridge link being a special case of a LAN).
- b) If infols is Mine, information for the port has been derived from the Root Port for the Bridge (with the addition of root port cost information). This includes the possibility that the Root Port is "Port 0," i.e., the bridge is the Root Bridge for the Bridged Local Area Network.
- c) If infols is Aged, information from the Root Bridge has been aged out. Just as for reselect (13.27.58), the state machine does not formally allow the Aged state to persist. However, if there is a delay in recomputing the new root port, correct processing of a received BPDU is specified.
- d) Finally if the port is disabled, infols is Disabled.

13.27.28 InternalPortPathCost

The port's contribution, when it is an IST or SPT Root Port (for MSTP and SPB protocols) to the Internal Root Path Cost (13.9) for the bridge.

13.27.29 learn

A Boolean. See 13.38.

13.27.30 learning

A Boolean. See 13.38.

13.27.31 master

A Boolean. Used to determine the value of the Master flag for this MSTI and port in transmitted MST BPDUs.

Set TRUE if the Port Role for the MSTI and Port is Root Port or Designated Port, and the bridge has selected one of its ports as the Master Port for this MSTI or the mastered flag is set for this MSTI for any other Bridge Port with a Root Port or Designated Port Role. Set FALSE otherwise.

13.27.32 mastered

A Boolean. Used to record the value of the Master flag for this MSTI and port in MST BPDUs received from the attached LAN.

NOTE—master and mastered signal the connection of the MSTI to the CST via the Master Port throughout the MSTI. These variables and their supporting procedures do not affect the connectivity provided by this standard but permit future enhancements to MSTP providing increased flexibility in the choice of Master Port without abandoning plug-and-play network migration. They are, therefore, omitted from the overviews of protocol operation, including Figure 13-13.

13.27.33 mcheck

A Boolean. May be set by management to force the Port Protocol Migration state machine to transmit RST (MST, or SPT) BPDUs for a MigrateTime (13.26.6, Table 13-5) period, to test whether all STP Bridges on the attached LAN have been removed and the Port can continue to transmit RSTP BPDUs. Setting mcheck has no effect if stpVersion (13.28.22) is TRUE.

1 **13.27.34 msgPriority**
2

3 For the CIST and a given port, the CIST Root Identifier, External Root Path Cost, Regional Root Identifier,
4 Internal Root Path Cost, Designated Bridge Identifier, and Designated Port Identifier components of the
5 CIST message priority vector conveyed in a received BPDU, as defined in 13.10.

6
7 For a given MSTI and port, the Regional Root Identifier, Internal Root Path Cost, Designated Bridge
8 Identifier, and Designated Port Identifier components of the MSTI message priority vector, as defined in
9 13.11 and conveyed in a received BPDU for this MSTI.

10
11 **13.27.35 msgTimes**
12

13 For the CIST and a given port, the timer parameter values (Message Age, Max Age, Forward Delay, Hello
14 Time, and remainingHops) conveyed in a received BPDU. If the BPDU is an STP or RST BPDU without
15 MSTP parameters, remainingHops is set to the value of the MaxHops component of BridgeTimes (13.26.4).

16
17 For a given MSTI and port, the value of remainingHops received in the same BPDU as the message priority
18 components of this MSTI's msgPriority parameter.

19
20 **13.27.36 neighbourPriority**
21

22 For a bridge port attached to a point-to-point LAN within the same SPT Region, the designated priority of
23 the other bridge attached to that LAN as calculated by ISIS-SPB for a given SPT. Receipt of a Agreement
24 Digest matching the bridge component's agreementDigest implies receipt of an Agreement, with
25 agreedPriority = neighbourPriority, for each SPT for which the port's selectedRole is DesignatedPort.

26
27 If the bridge port is attached to a shared media LAN that is within the same SPT Region, i.e. all bridges
28 attached to that LAN are within the Region, then neighbourPriority is the best (13.9) of all the neighbour's
29 calculated designated priority vectors, and an SPT BPDU with a matching digest has to be received from all
30 the neighbours before agreedPriority is updated.

31
32 **13.27.37 newInfo**
33

34 A Boolean. Set TRUE if a BPDU conveying changed CIST information is to be transmitted. It is set FALSE
35 by the Port Transmit state machine.

36
37 **13.27.38 newInfoMsti**
38

39 A Boolean. Set TRUE if a BPDU conveying changed MSTI information is to be transmitted. It is set FALSE
40 by the Port Transmit state machine.

41
42 **13.27.39 operEdge**
43

44 A Boolean. The value of the operEdgePort parameter, as determined by the operation of the Bridge
45 Detection state machine (13.33).

46
47 **13.27.40 portEnabled**
48

49 A Boolean. Set if the Bridge's MAC Relay Entity and Spanning Tree Protocol Entity can use the MAC
50 Service provided by the Bridge Port's MAC entity to transmit and receive frames to and from the attached
51 LAN, i.e., portEnabled is TRUE if and only if:

- 52
53 a) MAC_Operational (6.6.2) is TRUE; and
54 b) Administrative Bridge Port State (8.4, 13.12) for the port is Enabled.

13.27.41 PortHelloTime

PortHelloTime takes the recommended default value given in Table 13-5

13.27.42 portId

The Port Identifier for this port. This variable forms a component of the port priority and designated priority vectors (13.10,13.11).

The four most significant bits of the Port Identifier (the settable Priority component) for the CIST and for each MSTI can be modified independently of the setting of those bits for all other trees, as a part of allowing full and independent configuration control to be exerted over each Spanning Tree instance.

13.27.43 portPriority

For the CIST and a given port, the CIST Root Identifier, External Root Path Cost, Regional Root Identifier, Internal Root Path Cost, Designated Bridge Identifier, and Designated Port Identifier components of the port's port priority vector (13.10).

For a given MSTI and port, the Regional Root Identifier, Internal Root Path Cost, Designated Bridge Identifier, and Designated Port Identifier components of the port's MSTI port priority vector (13.11).

13.27.44 portTimes

For the CIST and a given port, the port's timer parameter values (Message Age, Max Age, Forward Delay, Hello Time, and remainingHops). The Hello Time timer parameter value is used in transmitted BPDUs.

For a given MSTI and port, the value of remainingHops for this MSTI in transmitted BPDUs.

13.27.45 proposed

A Boolean. See 13.16.

13.27.46 proposing

A Boolean. See 13.16.

13.27.47 pseudoRootId (L2GP)

A Bridge Identifier configured by management on a per port and per instance basis. By default, it is set to the BridgeIdentifier (13.26.2). <<This "per instance basis" does not makes sense. This appears to be pseudoRootId for the CST Root, and there is only one of those. If it is meant to be a pseudoRootId for an MSTI Regional Root then there is much unexplained about L2GP.>>

L2GP only.

13.27.48 rcvdBPDU

A Boolean. Set by system dependent processes, this variable notifies the Port Receive state machine (13.31) when a valid (*Clause 14*) Configuration, TCN, RST, MST, or SPT BPDU (*14.3*) is received on the Port. Reset by the Port Receive state machine.

1 **13.27.49 rcvInfo**

2
3 Set to the result of the rcvInfo() procedure (13.29.13).

4
5 **13.27.50 rcvInternal**

6
7 A Boolean. Set TRUE by the Receive Machine if the BPDU received was transmitted by a bridge in the
8 same MST Region as the receiving bridge.

9
10 **13.27.51 rcvMsg**

11
12 A Boolean. See 13.31.

13
14 **13.27.52 rcvRSTP**

15
16 A Boolean. See 13.31.

17
18 **13.27.53 rcvSTP**

19
20 A Boolean. See 13.31.

21
22 **13.27.54 rcvTc**

23
24 A Boolean. See 13.29.25 and 13.39.

25
26 **13.27.55 rcvTcAck**

27
28 A Boolean. See 13.29.25 and 13.39.

29
30 **13.27.56 rcvTcn**

31
32 A Boolean. See 13.29.25 and 13.39.

33
34 **13.27.57 reRoot**

35
36 A Boolean. See 13.38.

37
38 **13.27.58 reselect**

39
40 A Boolean. See 13.36.

41
42 **13.27.59 restrictedRole**

43
44 A Boolean. Set by management. If TRUE causes the port not to be selected as Root Port for the CIST or any
45 MSTI, even it has the best spanning tree priority vector. Such a port will be selected as an Alternate Port
46 after the Root Port has been selected. This parameter should be FALSE by default. If set, it can cause lack of
47 spanning tree connectivity. It is set by a network administrator to prevent bridges external to a core region of
48 the network influencing the spanning tree active topology, possibly because those bridges are not under the
49 full control of the administrator.

50
51 **13.27.60 restrictedTcn**

52
53 A Boolean. Set by management. If TRUE causes the port not to propagate received topology change
54 notifications and topology changes to other ports. This parameter should be FALSE by default. If set it can

1 cause temporary loss of connectivity after changes in a spanning trees active topology as a result of
2 persistent incorrectly learned station location information. It is set by a network administrator to prevent
3 bridges external to a core region of the network, causing address flushing in that region, possibly because
4 those bridges are not under the full control of the administrator or MAC_Operational for the attached LANs
5 transitions frequently.

6 7 **13.27.61 role**

8
9 The current Port Role. DisabledPort, RootPort, DesignatedPort, AlternatePort, BackupPort, or MasterPort.

10
11
12 NOTE—The MasterPort role applies each MSTI when the CIST Port Role is RootPort and connects to another MST
13 Region. An MSTI Master Port is part of the stable active topology for frames assigned to that MSTI, just as the CIST
14 Root Port forwards frames for the IST. The Port State for each MSTI may differ as required to suppress temporary loops.

15 16 **13.27.62 selected**

17
18 A Boolean. See 13.36, 13.29.23.

19 20 **13.27.63 selectedRole**

21
22 A newly computed role for the port.

23 24 **13.27.64 sendRSTP**

25
26
27 A Boolean. See 13.32, 13.34.

28 29 **13.27.65 sync**

30
31
32 A Boolean. Set to force the Port State to be compatible with the loop free active topology determined by the
33 priority vectors held by this bridge (13.16, 13.24) for this tree (CIST, or MSTI), transitioning the Port State
34 to Discarding, and soliciting an Agreement if possible, if the port is not already synchronized (13.27.66).

35 36 **13.27.66 synced**

37
38 A Boolean. TRUE only if the Port State is compatible with the loop free active topology determined by the
39 priority vectors held by this bridge for this tree (13.16, 13.24).

40 41 **13.27.67 tcAck**

42
43
44 A Boolean. Set to transmit a Configuration Message with a topology change acknowledge flag set.

45 46 **13.27.68 tcProp**

47
48 A Boolean. Set by the Topology Change state machine of any other port, to indicate that a topology change
49 should be propagated through this port.

50 51 **13.27.69 tick**

52
53
54 A Boolean. See the Port Timers state machine (13.30).

13.27.70 txCount

A counter. Incremented by the Port Transmission (13.34) state machine on every BPDU transmission, and decremented used by the Port Timers state machine (13.30) once a second. Transmissions are delayed if txCount reaches TxHoldCount ().

13.27.71 updtInfo

A boolean. Set by the Port Role Selection state machine (13.36, 13.29.33) to tell the Port Information state machine that it should copy designatedPriority to portPriority and designatedTimes to portTimes.

13.28 State machine conditions and parameters

The following variable evaluations are defined for notational convenience in the state machines:

- a) allSptAgree (13.28.1)
- b) allSynced (13.28.2)
- c) allTransmitReady (13.28.3)
- d) cist (13.28.4)
- e) cistRootPort (13.28.5)
- f) cistDesignatedPort (13.28.6)
- g) EdgeDelay (13.28.7)
- h) forwardDelay (13.28.8)
- i) FwdDelay (13.28.9)
- j) HelloTime (13.28.10)
- k) MaxAge (13.28.12)
- l) msti (13.28.11)
- m) mstiDesignatedOrTCpropagatingRootPort (13.28.13)
- n) mstiMasterPort (13.28.14)
- o) operPointToPointMAC (13.28.15)
- p) rcvdAnyMsg (13.28.16)
- q) rcvdCistMsg (13.28.17)
- r) rcvdMstiMsg (13.28.18)
- s) reRooted (13.28.19)
- t) rstpVersion (13.28.20)
- u) spt (13.28.21)
- v) stpVersion (13.28.22)
- w) updtCistInfo (13.28.23)
- x) updtMstiInfo (13.28.24)

13.28.1 allSptAgree

TRUE, if and only if, agree is TRUE for the given port for all SPTs.

13.28.2 allSynced

The condition allSynced is TRUE for a given port, for a given tree, if and only if

- a) For all ports for the given tree, selected is TRUE, the port's role is the same as its selectedRole, and updtInfo is FALSE; and
- b) The role of the given port is
 - 1) Root Port or Alternate Port and synced is TRUE for all ports for the given tree other than the Root Port; or

- 2) Designated Port and synced is TRUE for all ports for the given tree other than the given port; or
- 3) Designated Port, and the tree is an SPT or the IST, and the Root Port of the tree and the given port are both within the bridge's SPT Region, and both learning and forwarding are FALSE for the given port; or
- 4) Master Port and synced is TRUE for all ports for the given tree other than the given port.

13.28.3 allTransmitReady

TRUE, if and only if, for the given port for all trees

- a) selected is TRUE; and
- b) updtInfo is FALSE.

13.28.4 cist

TRUE only for CIST state machines; i.e., FALSE for MSTI or SPT state machine instances.

13.28.5 cistRootPort

TRUE if the CIST role for the given port is RootPort.

13.28.6 cistDesignatedPort

TRUE if the CIST role for the given port is DesignatedPort.

13.28.7 EdgeDelay

Returns the value of MigrateTime if operPointToPointMAC is TRUE, and the value of MaxAge otherwise.

13.28.8 forwardDelay

Returns the value of HelloTime if sendRSTP is TRUE, and the value of FwdDelay otherwise.

13.28.9 FwdDelay

The Forward Delay component of the CIST's designatedTimes parameter (13.27.16).

13.28.10 HelloTime

The Hello Time component of the CIST's portTimes parameter (13.27.44) with the recommended default value given in Table 13-5.

13.28.11 msti

TRUE only for MSTI state machines; i.e., FALSE for CIST or SPT state machine instances.

13.28.12 MaxAge

The Max Age component of the CIST's designatedTimes parameter (13.27.16).

13.28.13 mstiDesignatedOrTCpropagatingRootPort

TRUE if the role for any MSTI for the given port is either:

- 1 a) DesignatedPort; or
2 b) RootPort, and the instance for the given MSTI and port of the tcWhile timer is not zero.
3

4 **13.28.14 mstiMasterPort**

5
6 TRUE if the role for any MSTI for the given port is MasterPort.
7

8 **13.28.15 operPointToPoint**

9
10 TRUE if operPointToPointMAC (<6.6.3>) is TRUE for the Bridge Port.
11

12 **13.28.16 rcvdAnyMsg**

13
14 TRUE for a given port if rcvdMsg is TRUE for the CIST or any MSTI for that port.
15

16 **13.28.17 rcvdCistMsg**

17
18 TRUE for a given port if and only if rcvdMsg is TRUE for the CIST for that port.
19

20 **13.28.18 rcvdMstiMsg**

21
22 TRUE for a given port and MSTI if and only if rcvdMsg is FALSE for the CIST for that port and rcvdMsg is
23 TRUE for the MSTI for that port.
24

25 **13.28.19 reRooted**

26
27 TRUE if the rrWhile timer is clear (zero) for all Ports for the given tree other than the given Port.
28

29 **13.28.20 rstpVersion**

30
31 TRUE if ForceProtocolVersion (13.7.2) is greater than or equal to 2.
32

33 **13.28.21 spt**

34
35 TRUE only for SPT state machines, or for per port state machines if the bridge in an SPT Bridge; i.e.,
36 FALSE for CIST and MSTI state machine instances.
37

38 **13.28.22 stpVersion**

39
40 TRUE if Force Protocol Version (13.7.2) is less than 2.
41

42 **13.28.23 updtCistInfo**

43
44 TRUE for a given port if and only if updtInfo is TRUE for the CIST for that port.
45

46 **13.28.24 updtMstiInfo**

47
48 TRUE for a given port and MSTI if and only if updtInfo is TRUE for the MSTI for that port or updtInfo is
49 TRUE for the CIST for that port.
50

51
52 NOTE—The dependency of rcvdMstiMsg and updtMstiInfo on CIST variables for the port reflects the fact that MSTIs
53 exist in a context of CST parameters. The state machines ensure that the CIST parameters from received BPDUs are
54 processed and updated prior to processing MSTI information.

13.29 State machine procedures

The following procedures perform the functions specified for both the state machines for all trees, or specifically for the CIST, a given MSTI, or a given SPT:

- a) `betterorsameInfo(newInfols)` (13.29.1)
- b) `checkBPDUconsistency()` (13.29.2)
- c) `clearAllRcvdMsgs()` (13.29.3)
- d) `clearReselectTree()` (13.29.4)
- e) `disableForwarding()` (13.29.5)
- f) `disableLearning()` (13.29.6)
- g) `enableForwarding()` (13.29.7)
- h) `enableLearning()` (13.29.8)
- i) `fromSameRegion()` (13.29.9)
- j) `newTcDetected()` (13.29.10)
- k) `newTcWhile()` (13.29.11)
- l) `preparePseudoInfo()` (13.29.12)
- m) `rcvInfo()` (13.29.13)
- n) `rcvMsgs()` (13.29.14)
- o) `recordAgreement()` (13.29.16)
- p) `recordDispute()` (13.29.17)
- q) `recordMastered()` (13.29.18)
- r) `recordPriority()` (13.29.19)
- s) `recordProposal()` (13.29.20)
- t) `recordTimes()` (13.29.21)
- u) `setReRootTree()` (13.29.22)
- v) `setSelectedTree()` (13.29.23)
- w) `setSyncTree()` (13.29.24)
- x) `setTcFlags()` (13.29.25)
- y) `setTcPropTree()` (13.29.26)
- z) `syncMaster()` (13.29.27)
- aa) `txConfig()` (13.29.28)
- ab) `txRstp()` (13.29.29)
- ac) `txTcn()` (13.29.30)
- ad) `updtBPDUVersion()` (13.29.31)
- ae) `updtRcvdInfoWhile()` (13.29.32)
- af) `updtRolesTree()` (13.29.33)
- ag) `updtRolesDisabledTree()` (13.29.34)

The following procedures perform the functions specified for all SPTs, or for a given SPT or the CIST when SPB protocols are implemented:

- ah) `rcvAgreements()` (13.29.15)
- ai) `updtAgreement()` (13.29.35)

All references to named variables in the specification of procedures are to instances of the variables corresponding to the instance of the state machine using the function, i.e., to the CIST or the given MSTI or the given SPT as appropriate. References to forwarding and learning apply to frames assigned to the specified tree.

13.29.1 `betterorsameInfo(newInfols)`

Returns TRUE if, for a given port and tree (CIST, or MSTI), either

- 1 a) The procedure's parameter newInfoIs is Received, and infols is Received and the msgPriority vector
2 is better than or the same as (13.10) the portPriority vector; or,
3 b) The procedure's parameter newInfols is Mine, and infols is Mine and the designatedPriority vector is
4 better than or the same as (13.10) the portPriority vector.
5

6 Returns False otherwise.
7

8 NOTE—This procedure is not invoked (in the case of a MSTI) if the received BPDU carrying the MSTI information was
9 received from another MST Region. In that event, the Port Receive Machine (using rcvMsgs()) does not set rcvdMsg
10 for any MSTI, and the Port Information Machine's SUPERIOR_DESIGNATED state is not entered.
11

12 **13.29.2 checkBPDUConsistency()** 13

14 This procedure compares the message priority vector of the information received on the port with the port
15 priority vector for the port, and:
16

- 17 a) If the received message priority vector is superior to the port priority vector; and
18 b) The BPDU is an STP BPDU (version 0 or version 1); or
19 c) The BPDU is an RST or MST BPDU (type 2, version 2 or above) and its Port Role values indicates
20 Designated and its Learning flag is set;
21
22

23 then, for the CIST and all the MSTIs on this port the disputed flag is set and agreed is cleared.
24

25 **13.29.3 clearAllRcvdMsgs()** 26

27 Clears rcvdMsg for the CIST and all MSTIs, for this port.
28
29

30 **13.29.4 clearReselectTree()** 31

32 Clears reselect for the tree (the CIST or a given MSTI) for all ports of the bridge.
33
34

35 **13.29.5 disableForwarding()** 36

37 An implementation dependent procedure that causes the Forwarding Process (7.7) to stop forwarding frames
38 through the Port. The procedure does not complete until forwarding has stopped.
39

40 **13.29.6 disableLearning()** 41

42 An implementation dependent procedure that causes the Learning Process (7.8) to stop learning from the
43 source address of frames received on the Port. The procedure does not complete until learning has stopped.
44

45 **13.29.7 enableForwarding()** 46

47 An implementation dependent procedure that causes the Forwarding Process (7.7) to start forwarding frames
48 through the Port. The procedure does not complete until forwarding has been enabled.
49

50 **13.29.8 enableLearning()** 51

52 An implementation dependent procedure that causes the Learning Process (7.8) to start learning from frames
53 received on the Port. The procedure does not complete until learning has been enabled.
54

13.29.9 fromSameRegion()

Returns TRUE if rcvdRSTP is TRUE, and the received BPDU conveys a MST Configuration Identifier that matches that held for the bridge. Returns FALSE otherwise.

13.29.10 newTcDetected()

If the value of tcDetected is zero and sendRSTP is TRUE, this procedure sets the value of tcDetected to HelloTime plus one second. The value of HelloTime is taken from the CIST's portTimes parameter (13.27.44) for this port.

If the value of tcDetected is zero and sendRSTP is FALSE, this procedure sets the value of tcDetected to the sum of the Max Age and Forward Delay components of rootTimes.

Otherwise the procedure takes no action.

13.29.11 newTcWhile()

If the value of tcWhile is zero and sendRSTP is TRUE, this procedure sets the value of tcWhile to HelloTime plus one second and sets either newInfo TRUE for the CIST or newInfoMsti TRUE for a given MSTI. The value of HelloTime is taken from the CIST's portTimes parameter (13.27.44) for this port.

If the value of tcWhile is zero and sendRSTP is FALSE, this procedure sets the value of tcWhile to the sum of the Max Age and Forward Delay components of rootTimes and does not change the value of either newInfo or newInfoMsti.

Otherwise the procedure takes no action.

13.29.12 preparePseudoInfo()

Using local parameters, this procedure creates a Pseudo Info BPDU that will be presented to the spanning tree as if it had been received from the physical port on which it was invoked. The components of this BPDU are as follows:

- a) This is an MST BPDU: Protocol Identifier 0, Protocol Version Identifier 3 and BPDU Type 2;
- b) Message Age, Max Age, Hello Time and Forward Delay are derived from BridgeTimes (13.26.4);
- c) The CIST information carries the message priority vector (13.10) with a value of {pseudoRootId, 0, pseudoRootId, 0, 0, 0};
- d) CIST Flags with the Port Role flags indicating Designated, and the Learning and Forwarding flags set;
- e) The Version 1 Length is 0 and Version 3 Length calculated appropriately;
- f) For each MSTI configured on the bridge, the corresponding MSTI Configuration Message carries:
 - 1) a message priority vector with a value of {pseudoRootId, 0, 0, 0};
 - 2) MSTI Flags with the Port Role flags indicating Designated, and the Learning and Forwarding flags set;
 - 3) MSTI Remaining Hops set to the value of the MaxHops component of BridgeTimes (13.26.4).

13.29.13 rcvInfo()

Decodes received BPDUs. Sets rcvdTcn and sets rcvdTc for each and every MSTI if a TCN BPDU has been received, and extracts the message priority and timer values from the received BPDU storing them in the msgPriority and msgTimes variables.

Returns SuperiorDesignatedInfo if, for a given port and tree (CIST, or MSTI):

- 1 a) The received CIST or MSTI message conveys a Designated Port Role, and
2 1) The message priority (msgPriority—13.27.34) is superior (13.10 or 13.11) to the port's port
3 priority vector, or
4 2) The message priority is the same as the port's port priority vector, and any of the received timer
5 parameter values (msgTimes—13.27.35) differ from those already held for the port
6 (portTimes—13.27.44).
7

8 Otherwise, returns RepeatedDesignatedInfo if, for a given port and tree (CIST, or MSTI):
9

- 10 b) The received CIST or MSTI message conveys a Designated Port Role, and
11 1) A message priority vector and timer parameters that are the same as the port's port priority
12 vector and timer values; and
13 2) infols is Received.
14

15 Otherwise, returns InferiorDesignatedInfo if, for a given port and tree (CIST, or MSTI):
16
17

- 18 c) The received CIST or MSTI message conveys a Designated Port Role.
19

20 Otherwise, returns InferiorRootAlternateInfo if, for a given port and tree (CIST, or MSTI):
21

- 22 d) The received CIST or MSTI message conveys a Root Port, Alternate Port, or Backup Port Role and
23 a CIST or MSTI message priority that is the same as or worse than the CIST or MSTI port priority
24 vector.
25

26 Otherwise, returns OtherInfo.
27

28 NOTE—A Configuration BPDU implicitly conveys a Designated Port Role.
29

30 **13.29.14 rcvMsgs()** 31

32 This procedure is invoked by the Port Receive state machine (13.31) on receipt of a BPDU.
33

34 If SPB protocols are implemented, ForceProtocolVersion is 4 (or greater), the BPDU is an SPT BPDU, and
35 has been received on a Bridge Port that is internal to the SPT Region (i.e. is not a Boundary Port, see 13.12),
36 then the rcvAgreements() procedure is used to process the CIST and SPT information conveyed by the
37 BPDU.
38

39 Otherwise (i.e. if rcvAgreements() is not used) this procedure sets rcvdMsg for the CIST, and makes the
40 received CST or CIST message available to the CIST Port Information state machines.
41

42 If and only if rcvdInternal is set, this procedure sets rcvdMsg for each and every MSTI for which a MSTI
43 message is conveyed in the BPDU, and makes available each MSTI message and the common parts of the
44 CIST message priority (the CIST Root Identifier, External Root Path Cost, and Regional Root Identifier) to
45 the Port Information state machine for that MSTI.
46

47 **13.29.15 rcvAgreements()** 48

49 The variables agreedN and agreeND are set to the values received BPDU's Agreement Number and Discard
50 Agreement Number respectively. If selectedRole is not DesignatedPort and agreePending is clear and
51 agreeND immediately precedes agreeN, then agreementOutstanding for the CIST is assigned the value of
52 designatedPriority for the CIST. If agreeND equals agreeN, then agreementOutstanding for the CIST is
53 assigned the value HighestAgreementPriority.
54

1 If the received BPDU conveys a CIST Port Role of Root Port, Alternate Port, or Backup Port, and the
2 Agreement flag for the CIST in the BPDU is set, then `agreedPriority` is assigned the value of the CIST
3 message priority in the BPDU; otherwise `agreedPriority` is assigned the value `HighestAgreementPriority`.

4
5 The CIST proposed flag is set to the value of the Proposing flag for the CIST in the received BPDU.

6
7 The variable `agreedDigestRcvd` is updated with the Agreement Digest conveyed in the BPDU.

8
9 The `updtAgreement()` procedure is invoked for the port, for the CIST and for each SPT.

10
11 If `agreePending` is set and `agreeN` is not the immediate predecessor (in circular sequence) of `agreeND`,
12 then

13 14 **13.29.16 recordAgreement()**

15
16 For the CIST and a given port, if `rstpVersion` is TRUE, `operPointToPointMAC` (6.6.3) is TRUE, and the
17 received CIST Message has the Agreement flag set, the CIST `agreed` flag is set, and the CIST proposing flag
18 is cleared. Otherwise the CIST `agreed` flag is cleared. Additionally, if the CIST message was received from
19 a bridge in a different MST Region, i.e., the `rcvdInternal` flag is clear, the `agreed` and proposing flags for this
20 port for all MSTIs are set or cleared to the same value as the CIST `agreed` and proposing flags. If the CIST
21 message was received from a bridge in the same MST Region, the MSTI `agreed` and proposing flags are not
22 changed.

23
24 For a given MSTI and port, if `operPointToPointMAC` (6.6.3) is TRUE, and

- 25
26 a) The message priority vector of the CIST Message accompanying the received MSTI Message (i.e.,
27 received in the same BPDU) has the same CIST Root Identifier, CIST External Root Path Cost, and
28 Regional Root Identifier as the CIST port priority vector, and
29 b) The received MSTI Message has the Agreement flag set,

30
31 the MSTI `agreed` flag is set and the MSTI proposing flag is cleared. Otherwise the MSTI `agreed` flag is
32 cleared.

33
34 NOTE—MSTI Messages received from bridges external to the MST Region are discarded and not processed by
35 `recordAgreement()` or `recordProposal()`.

36 37 **13.29.17 recordDispute()**

38
39 For the CIST and a given port, if the CIST message has the learning flag set:

- 40
41 a) The `disputed` variable is set; and
42 b) The `agreed` variable is cleared.

43
44 Additionally, if the CIST message was received from a bridge in a different MST region (i.e., if the
45 `rcvdInternal` flag is clear), then for all the MSTIs:

- 46
47 c) The `disputed` variable is set; and
48 d) The `agreed` variable is cleared.

49
50 For a given MSTI and port, if the received MSTI message has the learning flag set:

- 51
52 e) The `disputed` variable is set; and
53 f) The `agreed` variable is cleared.
54

13.29.18 recordMastered()

For the CIST and a given port, if the CIST message was received from a bridge in a different MST Region, i.e. the rcvdInternal flag is clear, the mastered variable for this port is cleared for all MSTIs.

For a given MSTI and port, if the MSTI message was received on a point-to-point link and the MSTI Message has the Master flag set, set the mastered variable for this MSTI. Otherwise reset the mastered variable.

13.29.19 recordPriority()

Sets the components of the portPriority variable to the values of the corresponding msgPriority components.

13.29.20 recordProposal()

For the CIST and a given port, if the received CIST Message conveys a Designated Port Role, and has the Proposal flag set, the CIST proposed flag is set. Otherwise the CIST proposed flag is not changed. Additionally, if the CIST Message was received from a bridge in a different MST Region, i.e., the rcvdInternal flag is clear, the proposed flags for this port for all MSTIs are set or cleared to the same value as the CIST proposed flag. If the CIST message was received from a bridge in the same MST Region, the MSTI proposed flags are not changed.

For a given MSTI and port, if the received MSTI Message conveys a Designated Port Role, and has the Proposal flag set, the MSTI proposed flag is set. Otherwise the MSTI proposed flag is not changed.

13.29.21 recordTimes()

For the CIST and a given port, sets portTimes' Message Age, Max Age, Forward Delay, and remainingHops to the received values held in msgTimes and portTimes' Hello Time to msgTimes' Hello Time if that is greater than the minimum specified in the Compatibility Range column of Table 17-1 of IEEE Std 802.1D, and to that minimum otherwise.

For a given MSTI and port, sets portTime's remainingHops to the received value held in msgTimes.

13.29.22 setReRootTree()

Sets reRoot TRUE for this tree (the CIST or a given MSTI) for all ports of the bridge.

13.29.23 setSelectedTree()

Sets selected TRUE for this tree (the CIST or a given MSTI) for all ports of the bridge if reselect is FALSE for all ports in this tree. If reselect is TRUE for any port in this tree, this procedure takes no action.

13.29.24 setSyncTree()

Sets sync TRUE for this tree (the CIST or a given MSTI) for all ports of the bridge.

13.29.25 setTcFlags()

For the CIST and a given port:

- a) If the Topology Change Acknowledgment flag is set for the CIST in the received BPDU, sets rcvdTcAck TRUE.

- 1 b) If rcvdInternal is clear and the Topology Change flag is set for the CIST in the received BPDU, sets
2 rcvdTc TRUE for the CIST and for each and every MSTI.
3 c) If rcvdInternal is set, sets rcvdTc for the CIST if the Topology Change flag is set for the CIST in the
4 received BPDU.
5

6 For a given MSTI and port, sets rcvdTc for this MSTI if the Topology Change flag is set in the corresponding
7 MSTI message.
8

9 **13.29.26 setTcPropTree()**

10 If and only if restrictedTcn is FALSE for the port that invoked the procedure, sets tcProp TRUE for the given
11 tree (the CIST or a given MSTI) for all other ports.
12
13

14 **13.29.27 syncMaster()**

15 For all MSTIs, for each port that has infoInternal set:
16
17

- 18 a) Clears the agree, agreed, and synced variables; and
19 b) Sets the sync variable.
20

21 **13.29.28 txConfig()**

22 Transmits a Configuration BPDU. The first four components of the message priority vector (13.27.34)
23 conveyed in the BPDU are set to the value of the CIST Root Identifier, External Root Path Cost, Bridge
24 Identifier, and Port Identifier components of the CIST's designatedPriority parameter (13.27.15) for this
25 port. The topology change flag is set if (tcWhile != 0) for the port. The topology change acknowledgment
26 flag is set to the value of tcAck for the port. The remaining flags are set to zero. The value of the Message
27 Age, Max Age, and Fwd Delay parameters conveyed in the BPDU are set to the values held in the CIST's
28 designatedTimes parameter (13.27.16) for the port. The value of the Hello Time parameter conveyed in the
29 BPDU is set to the value held in the CIST's portTimes parameter (13.27.44) for the port.
30
31

32 **13.29.29 txRstp()**

33 Transmits a RST BPDU, MST BPDU, or SPT BPDU as determined by the value of ForceProtocolVersion
34 (13.7.2), and encoded as specified by *Clause 14*. All per port variables referenced in this clause (13.29.29)
35 are those for the transmitting port.
36
37

38 The first six components of the CIST message priority vector (13.27.34) conveyed in the BPDU are set to
39 the value of the CIST's designatedPriority parameter (13.27.15). The Port Role in the BPDU (14.2.1) is set
40 to the current value of the CIST's role (13.27.61). The Agreement and Proposal flags in the BPDU are set to
41 the values of agree (13.27.3) and proposing (13.27.46), respectively. The CIST topology change flag is set if
42 (tcWhile != 0) for the port. The topology change acknowledge flag in the BPDU is never used and is set to
43 zero. The Learning and Forwarding flags in the BPDU are set to the values of learning (13.27.30) and
44 forwarding (13.27.25) for the CIST, respectively. The value of the Message Age, Max Age, and Fwd Delay
45 parameters conveyed in the BPDU are set to the values held in the CIST's designatedTimes parameter
46 (13.27.16). The value of the Hello Time parameter conveyed in the BPDU is set to the value held in the
47 CIST's portTimes parameter (13.27.44).
48

49 If the value of the Force Protocol Version parameter is less than 3, no further parameters are encoded in the
50 BPDU and the protocol version parameter is set to 2 (denoting a RST BPDU). Otherwise, MST BPDU
51 parameters are encoded:
52

- 53 a) The version 3 length.
54 b) The MST Configuration Identifier parameter of the BPDU is the value of MstConfigId (13.26.7).

- c) The CIST Internal Root Path Cost (13.27.15).
- d) The CIST Bridge Identifier (CIST Designated Bridge Identifier—13.27.15).
- e) The CIST Remaining Hops (13.27.16).
- f) The parameters of each MSTI message, encoded in MSTID order.

NOTE—No more than 64 MSTIs may be supported. The parameter sets for all of these can be encoded in a standard-sized Ethernet frame. The number of MSTIs supported can be zero, as for an SPT Bridge is not obliged to have MSTIs configured in order to support shortest path bridging.

If the value of the Force Protocol Version parameter is less than 3, no further parameters are encoded in the BPDU and the protocol version parameter is set to 3 (denoting a MST BPDU). Otherwise, SPT BPDU parameters are encoded, and the protocol version parameter is set to 4 (denoting an SPT BPDU):

- g) If the port's CIST role is RootPort, AlternatePort, or BackupPort, and agree is TRUE; then
 - 1) if agreePending is TRUE or designatedPriority is better than agreementOutstanding, then:
 - i) if agreeN plus one is not agreeND, agreeN is incremented and agreePending is cleared;
 - ii) otherwise (i.e. if agreeN plus one is agreeND), agreePending is set.
 - 2) agreedND is set to the value of agreedN.
- h) If the port's CIST role is DesignatedPort, and agree is TRUE; then
 - 1) if agreed is set, agreedND is set to agreedN minus one;
 - 2) otherwise (i.e. if agreed is clear) agreedND is set to agreedN.
- i) agreeN (13.27.10) is encoded in the Agreement Number field.
- j) agreedND (13.27.11) is encoded in the Discarded Agreement Number field.
- k) agreeDigest (13.27.6) is encoded in the Agreement Digest field.

13.29.30 txTcn()

Transmits a TCN BPDU.

13.29.31 updtBPDUVersion()

Sets rcvdSTP TRUE if the BPDU received is a version 0 or version 1 TCN or a Config BPDU. Sets rcvdRSTP TRUE if the received BPDU is a RST BPDU or a MST BPDU.

13.29.32 updtRcvdInfoWhile()

Updates rcvdInfoWhile (13.25). The value assigned to rcvdInfoWhile is three times the Hello Time, if either:

- a) Message Age, incremented by 1 second and rounded to the nearest whole second, does not exceed Max Age and the information was received from a bridge external to the MST Region (rcvdInternal FALSE);

or

- b) remainingHops, decremented by one, is greater than zero and the information was received from a bridge internal to the MST Region (rcvdInternal TRUE);

and is zero otherwise.

The values of Message Age, Max Age, remainingHops, and Hello Time used in these calculations are taken from the CIST's portTimes parameter (13.27.44) and are not changed by this procedure.

13.29.33 updtRolesTree()

This procedure calculates the following priority vectors (13.9, 13.10 for the CIST, 13.11 for a MSTI) and timer values, for the CIST or a given MSTI:

- a) The *root path priority vector* for each Bridge Port that is not Disabled and has a *port priority vector* (portPriority plus portId—see 13.27.43 and 13.27.42) that has been recorded from a received message and not aged out (info == Received).
- b) The *root path priority vector* propagated and calculated by ISIS-SPB (if SPB protocols are implemented and ForceProtocolVersion is 4).
- c) The Bridge's *root priority vector* (rootPortId, rootPriority—13.26.8, 13.26.9), chosen as the best of the set of priority vectors comprising the bridge's own *bridge priority vector* (BridgePriority—13.26.3) plus all calculated root path priority vectors whose:
 - 1) DesignatedBridgeID Bridge Address component is not equal to that component of the bridge's own bridge priority vector (13.10) and,
 - 2) Port's restrictedRole parameter is FALSE.

NOTE—If ISIS-SPB is being used but did not provide the selected *root priority vector* for the CIST, that priority vector will be associated with the Master Port of the SPT Region (a Boundary Port of, and not internal to, the Region) and will be used by ISIS-SPB to propagate the CST component of the priority vector throughout the Region.

- d) The bridge's *root times*, (rootTimes—13.26.10), set equal to:
 - 1) BridgeTimes (13.26.4), if the chosen root priority vector is the bridge priority vector, or was calculated by ISIS-SPB; otherwise,
 - 2) portTimes (13.27.44) for the port associated with the selected root priority vector, with the Message Age component incremented by 1 second and rounded to the nearest whole second if the information was received from a bridge external to the MST Region (rcvdInternal FALSE), and with remainingHops decremented by one if the information was received from a bridge internal to the MST Region (rcvdInternal TRUE).
- e) The *designated priority vector* (designatedPriority—13.27.15) for each port that is not internal an SPT Region; and
- f) The *designated times* (designatedTimes—13.27.16) for each port set equal to the value of *root times*.

If the root priority vector for the CIST is recalculated, and has a different Regional Root Identifier than that previously selected, and has or had a non-zero CIST External Root Path Cost, the syncMaster() procedure (13.29.27) is invoked.

NOTE—Changes in Regional Root Identifier will not cause loops if the Regional Root is within an MST Region, as is the case if and only if the MST Region is the Root of the CST. This important optimization allows the MSTIs to be fully independent of each other in the case where they compose the core of a network.

The CIST, MSTI, or SPT Port Role for each port is assigned, and its port priority vector and timer information are updated as specified in the remainder of this clause (13.41.2).

If the port is Disabled (info == Disabled), selectedRole is set to DisabledPort.

Otherwise, if this procedure was invoked for an MSTI or an SPT, for a port that is not Disabled, and that has CIST port priority information was received from a bridge external to its bridge's Region (info == Received and infoInternal == FALSE), then:

- g) If the selected CIST Port Role (calculated for the CIST prior to invoking this procedure for an MSTI or SPT) is RootPort, selectedRole is set to MasterPort.
- h) If selected CIST Port Role is AlternatePort, selectedRole is set to AlternatePort.
- i) Additionally, updtInfo is set if the port priority vector differs from the designated priority vector or the port's associated timer parameter differs from the one for the Root Port.

1 Otherwise, for the CIST for a port that is not Disabled and not internal to an SPT Region, or for an MSTI for
2 a port of that is not Disabled and whose CIST port priority information was not received from a bridge
3 external to the Region (infols != Received or infolInternal == TRUE), the CIST or MSTI port role is assigned,
4 and the port priority vector and timer information updated as follows:
5

- 6 j) If the port priority vector information was aged (infols = Aged), updtInfo is set and selectedRole is
7 set to DesignatedPort;
- 8 k) If the port priority vector was derived from another port on the bridge or from the bridge itself as the
9 Root Bridge (infols = Mine), selectedRole is set to DesignatedPort. Additionally, updtInfo is set if the
10 port priority vector differs from the designated priority vector or the port's associated timer
11 parameter(s) differ(s) from the Root Port's associated timer parameters;
- 12 l) If the port priority vector was received in a Configuration Message and is not aged
13 (infols == Received), and the root priority vector is now derived from it, selectedRole is set to
14 RootPort, and updtInfo is reset;
- 15 m) If the port priority vector was received in a Configuration Message and is not aged
16 (infols == Received), the root priority vector is not now derived from it, the designated priority
17 vector is not better than the port priority vector, and the designated bridge and designated port
18 components of the port priority vector do not reflect another port on this bridge, selectedRole is set
19 to AlternatePort, and updtInfo is reset;
- 20 n) If the port priority vector was received in a Configuration Message and is not aged
21 (infols == Received), the root priority vector is not now derived from it, the designated priority
22 vector is not better than the port priority vector, and the designated bridge and designated port
23 components of the port priority vector reflect another port on this bridge, selectedRole is set to
24 BackupPort, and updtInfo is reset;
- 25 o) If the port priority vector was received in a Configuration Message and is not aged
26 (infols == Received), the root priority vector is not now derived from it, the designated priority
27 vector is better than the port priority vector, selectedRole is set to DesignatedPort, and updtInfo is
28 set.
29

30 Otherwise, for the CIST or an SPT, for a port that is not Disabled and is internal to an SPT Region, ISIS-SPB
31 determines the selectedRole (and other parameters, see 13.36), and uses updtAgreement() (13.29.35).
32

33 **13.29.34 upRolesDisabledTree()**

34
35 This procedure sets selectedRole to DisabledPort for all ports of the bridge for a given tree (CIST, MSTI, or
36 SPT).
37

38 **13.29.35 updtAgreement()**

39
40 If SPB protocols are implemented, this procedure is invoked for a given port, for the CIST or a given SPT,
41 by the updtRolesTree() procedure used by the Port Role Selection machine (13.36). The Port Role Selection
42 machine itself could have been invoked following receipt of a BPDU on a port that is at the boundary of the
43 SPT Region, possibly changing the context for the link state calculation, or following a link state update
44 computed by ISIS-SPB following receipt of an IS-IS PDU.
45

46 If the procedure has been invoked for the CIST:

- 47
48 a) If the port's selectedRole is DesignatedPort, agreed is TRUE if and only if:
49 1) agreeND equals agreeN; and
50 2) designatedPriority is the same or better (13.9) than agreedPriority.
- 51 b) If the port's selectedRole is not DesignatedPort, agreed is TRUE if and only if:
52 1) agreementOutstanding is the same or better than designatedPriority.
53

54 If the procedure has been invoked for an SPT:


- 1 c) If the port's selectedRole is DesignatedPort, and agreedDigest (13.27.5) for the port matches
2 agreementDigest (13.27.63):
3 1) agreementOutstanding (13.27.9) is assigned the value HighestAgreementPriority (13.27.36);
4 and
5 2) agreedPriority (13.27.9) is assigned the value of neighbourPriority (13.27.36).
6 d) If the port's selectedRole is DesignatedPort, agreed (13.27.4) is TRUE if and only if:
7 1) agreementOutstanding has the value HighestAgreementPriority; and
8 2) designatedPriority is the same or better than agreedPriority.
9 e) If the port's selectedRole is not DesignatedPort, and the agreedDigest for the port matches
10 agreementDigest:
11 1) agreementOutstanding is assigned the value of designatedPriority.
12 f) If the port's selectedRole is not DesignatedPort, and the agreedDigest for the port does not match
13 agreementDigest:
14 1) agreementOutstanding is assigned the worse of the values of agreementOutstanding and
15 designatedPriority.
16 g) If the port's selectedRole is not DesignatedPort, agreed (13.27.4) is TRUE if and only if:
17 1) agreementOutstanding is the same or better than designatedPriority.
18

19 Independently of whether the procedure was invoked for the CIST or an SPT:

- 20 h) The synced and agree variables for the port are cleared, and the sync variable set.
21
22

23 13.30 The Port Timers state machine

24
25 The Port Timers state machine shall implement the function specified by the state diagram in Figure 13-15
26 and the attendant definitions contained in 13.25 through 13.29.
27

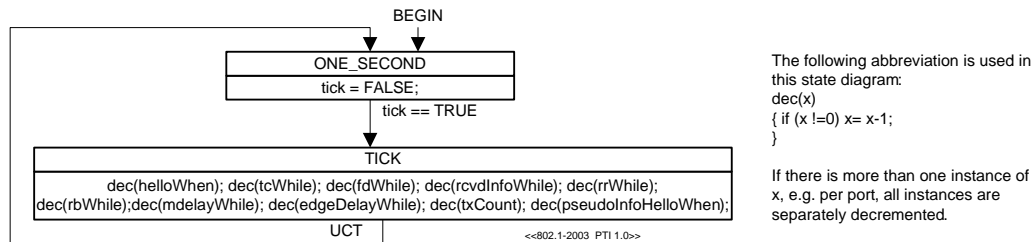

36 **Figure 13-15—Port Timers state machine**

37
38 The state machine uses tick (13.27), a signal set by an implementation-specific system clock function at one
39 second intervals, to decrement the timer variables for the CIST and all MSTIs for the port. The state machine
40 that uses a given timer variable is responsible for setting its initial value.
41
42
43
44
45
46
47
48
49
50
51
52
53
54

13.31 Port Receive state machine

The Port Receive state machine shall implement the function specified by the state diagram contained in Figure 13-16 and the attendant definitions contained in 13.25 through 13.29.

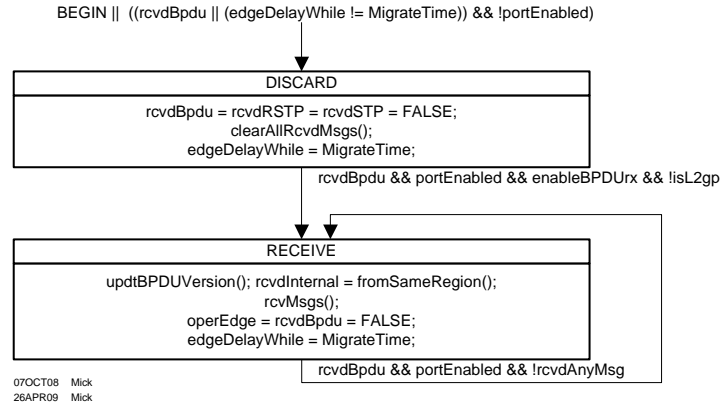


Figure 13-16—Port Receive state machine

This state machine is responsible for receiving each BPDU. The next BPDU is not processed until all rcvdMsg flags have been cleared by the per-tree state machines.

13.32 Port Protocol Migration state machine

The Port Protocol Migration state machine shall implement the function specified by the state diagram contained in Figure 13-18 and the attendant definitions contained in 13.25 through 13.29.

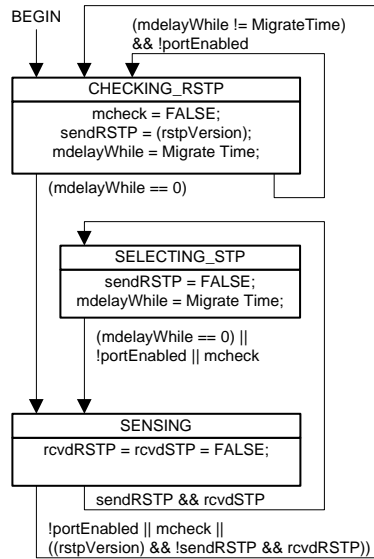


Figure 13-17—Port Protocol Migration state machine

13.33 Bridge Detection state machine

The Bridge Detection state machine shall implement the function specified by the state diagram contained in Figure 13-18 and the attendant definitions contained in 13.25 through 13.29.

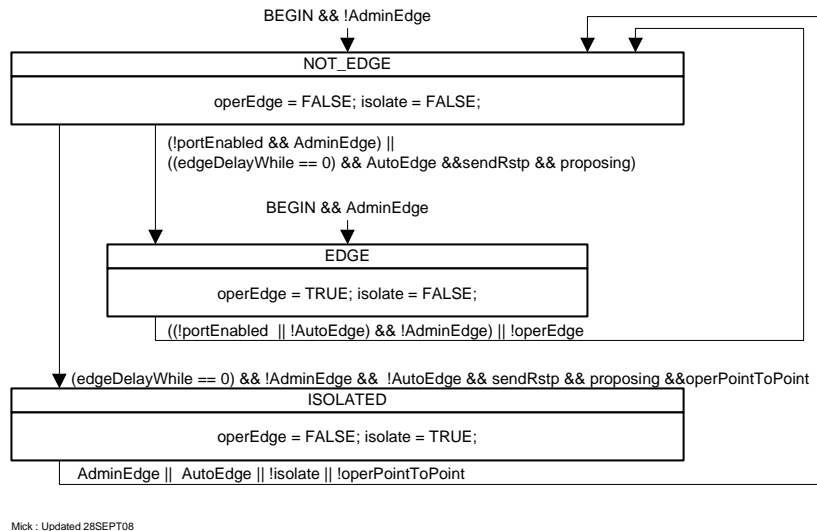


Figure 13-18—Bridge Detection state machine

13.34 Port Transmit state machine

The Port Transmit state machine shall implement the function specified by the state diagram contained in Figure 13-19 and the attendant definitions contained in 13.25 through 13.29.

This state machine is responsible for transmitting BPDUs. It also determines when the Agreement Digest in SPT BPDUs can be updated, and prompts transmission when that has been done.

NOTE 1—Any single received BPDU that changes the CIST Root Identifier, CIST External Root Path Cost, or CIST Regional Root associated with MSTIs should be processed entirely, or not at all, before encoding BPDUs for transmission. This recommendation minimizes the number of BPDUs to be transmitted following receipt of a BPDU with new information. It is not required for correctness and has not therefore been incorporated into the state machines.

NOTE 2—If a CIST state machine sets `newInfo`, this machine will ensure that a BPDU is transmitted conveying the new CIST information. If MST BPDUs can be transmitted through the port, this BPDU will also convey new MSTI information for all MSTIs. If a MSTI state machine sets `newInfoMsti`, and MST BPDUs can be transmitted through the port, this machine will ensure that a BPDU is transmitted conveying information for the CIST and all MSTIs. Separate `newInfo` and `newInfoMsti` variables are provided to avoid requiring useless transmission of a BPDU through a port that can only transmit STP BPDUs (as required by the Force Protocol Version parameter or Port Protocol Migration machine) following a change in MSTI information without any change to the CIST.

13.35 Port Information state machine

The Port Information state machine for each tree shall implement the function specified by the state diagram contained in Figure 13-20 and the attendant definitions contained in 13.25 through 13.29.

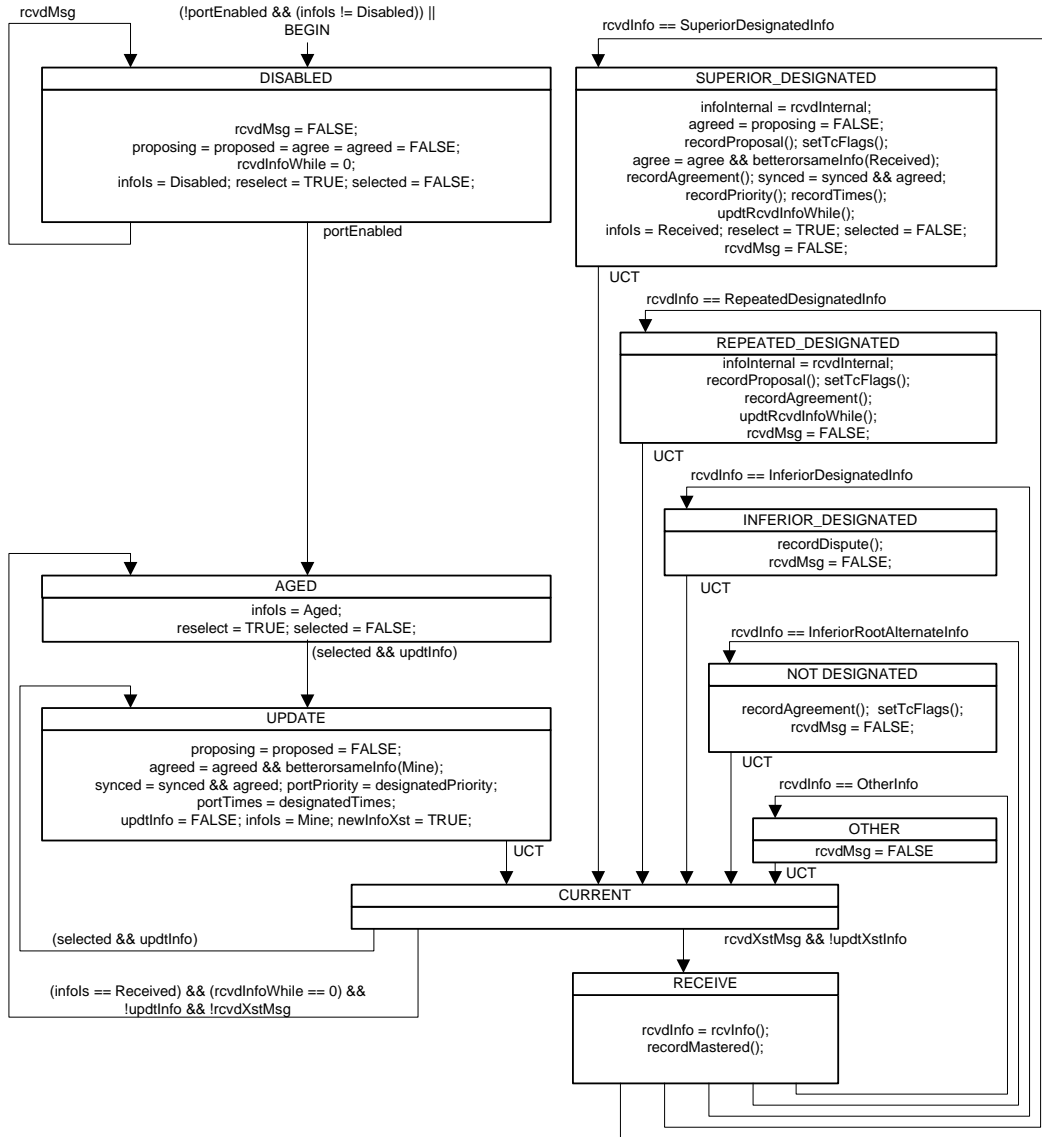


Figure 13-20—Port Information state machine

This state machine is responsible for recording the spanning tree information currently in use by the CIST or a given MSTI for a given port, ageing that information out if it was derived from an incoming BPDU, and recording the origin of the information in the infols variable. The selected variable is cleared and reselect set to signal to the Port Role Selection machine that port roles need to be recomputed. The infols and portPriority variables from all ports are used in that computation and, together with portTimes, determine new values of designatedPriority and designatedTimes. The selected variable is set by the Port Role Selection machine once the computation is complete.

13.36 Port Role Selection state machine

The Port Role Selection state machine shall implement the function specified by the state diagram contained in Figure 13-21 and the attendant definitions contained in 13.25 through 13.29.

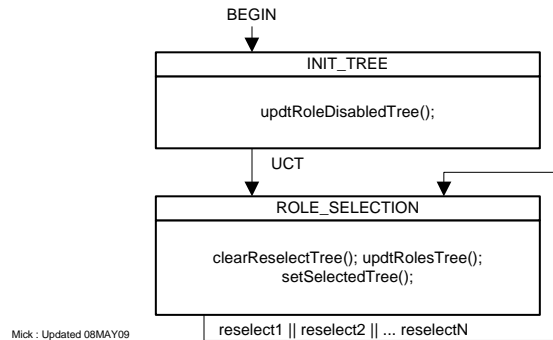


Figure 13-21—Port Role Selection state machine

When ISIS-SPB finishes a link state calculation, it clears the selected variable for each port for each SPT before updating agreementDigest (13.26.1) for the bridge component, the *root priority vector* (rootPortId, rootPriority—13.26.8, 13.26.9) for each SPT and the selectedRole (13.12, 13.27.63), *designated priority vector* (designatedPriority—13.27.15), and neighbourPriority for each port for each SPT. ISIS-SPB then sets reselect for each SPT.

13.37 Port Role Transitions state machine

The Port Role Transitions state machine shall implement the function specified by the state diagram contained in the following figures:

- Part 1: Figure 13-22 for both the initialization of this state machine and the states associated with the DisabledPort role; and
- Part 2: Figure 13-23 for the states associated with the MasterPort role; and
- Part 3: Figure 13-24 for the states associated with the RootPort role; and
- Part 4: Figure 13-25 for the states associated with the DesignatedPort role; and
- Part 5: Figure 13-26 for the states associated with the AlternatePort and BackupPort roles;

and the attendant definitions contained in 13.25 through 13.29.

As Figure 13-22, Figure 13-23, Figure 13-24, Figure 13-25, and Figure 13-26 are component parts of the same state machine, the global transitions associated with these diagrams are possible exit transitions from the states shown in any of the diagrams.

Figure 13-22 and Figure 13-26 show the Port Roles for ports that do not form part of the active topology of the given tree.

Figure 13-23, Figure 13-24, and Figure 13-25 show the Port Roles that form part of the active topology.

1
2
3
4
5
6
7
8
9
10
11
12
13
14
15
16
17
18
19
20
21
22
23
24
25
26
27
28
29
30
31
32
33
34
35
36
37
38
39
40
41
42
43
44
45
46
47
48
49
50
51
52
53
54

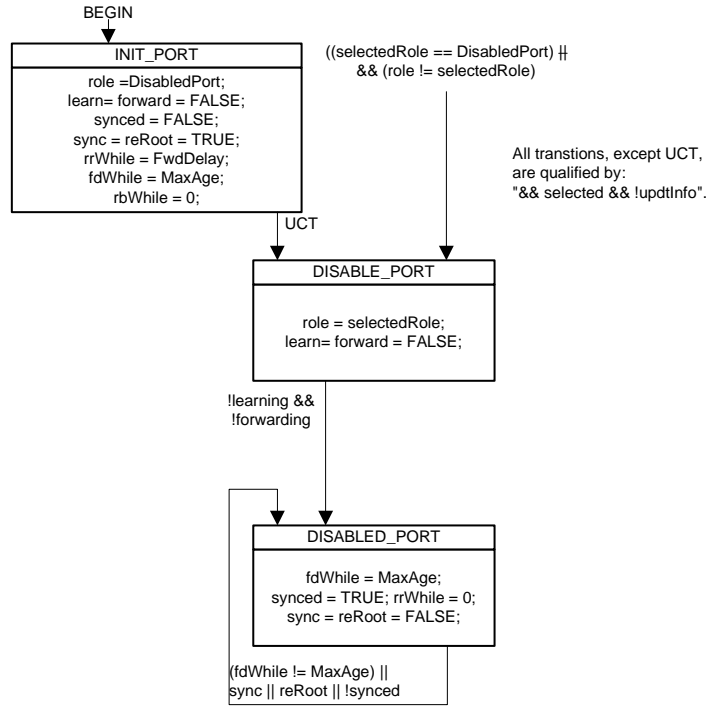


Figure 13-22—Disabled Port role transitions

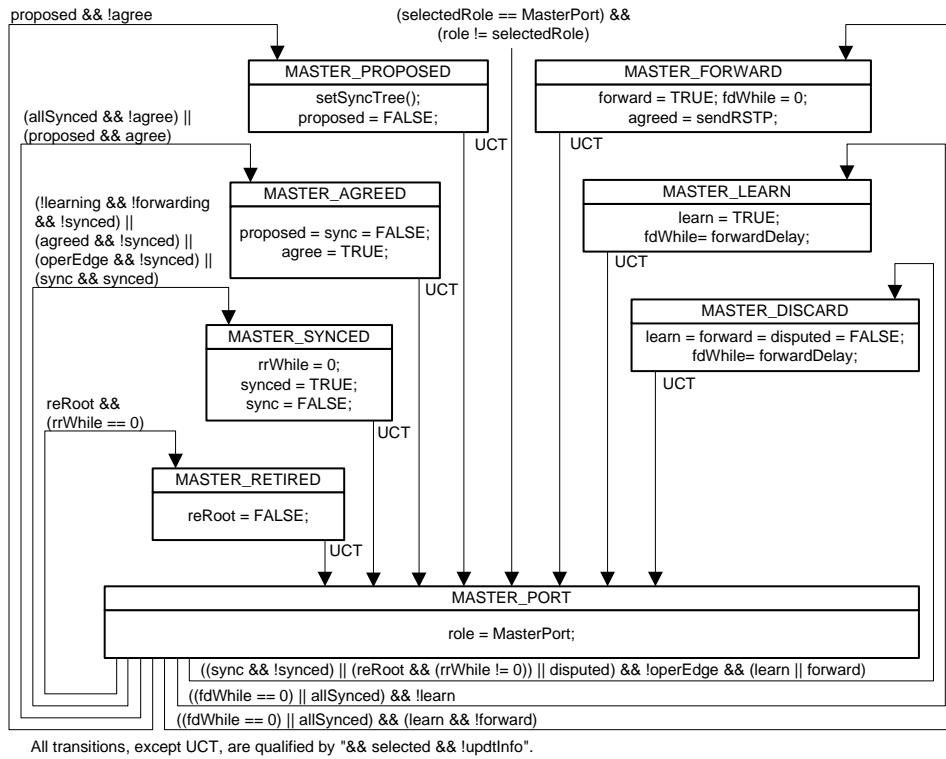


Figure 13-23—Port Role Transitions state machine—MasterPort

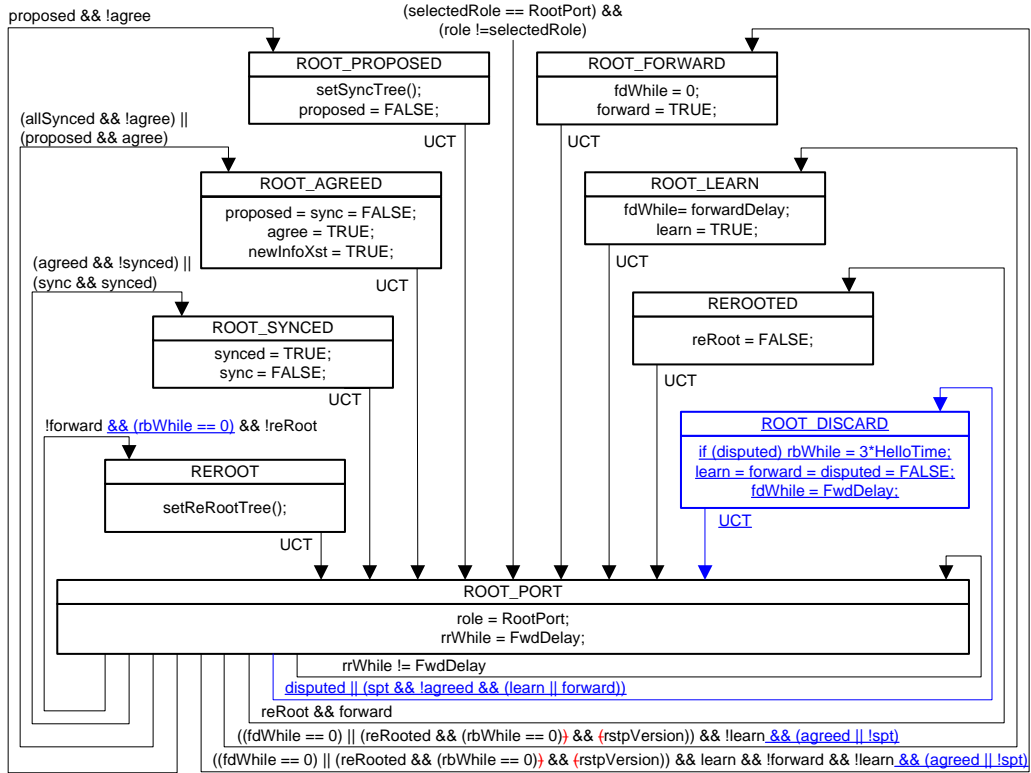


Figure 13-24—Port Role Transitions state machine—RootPort

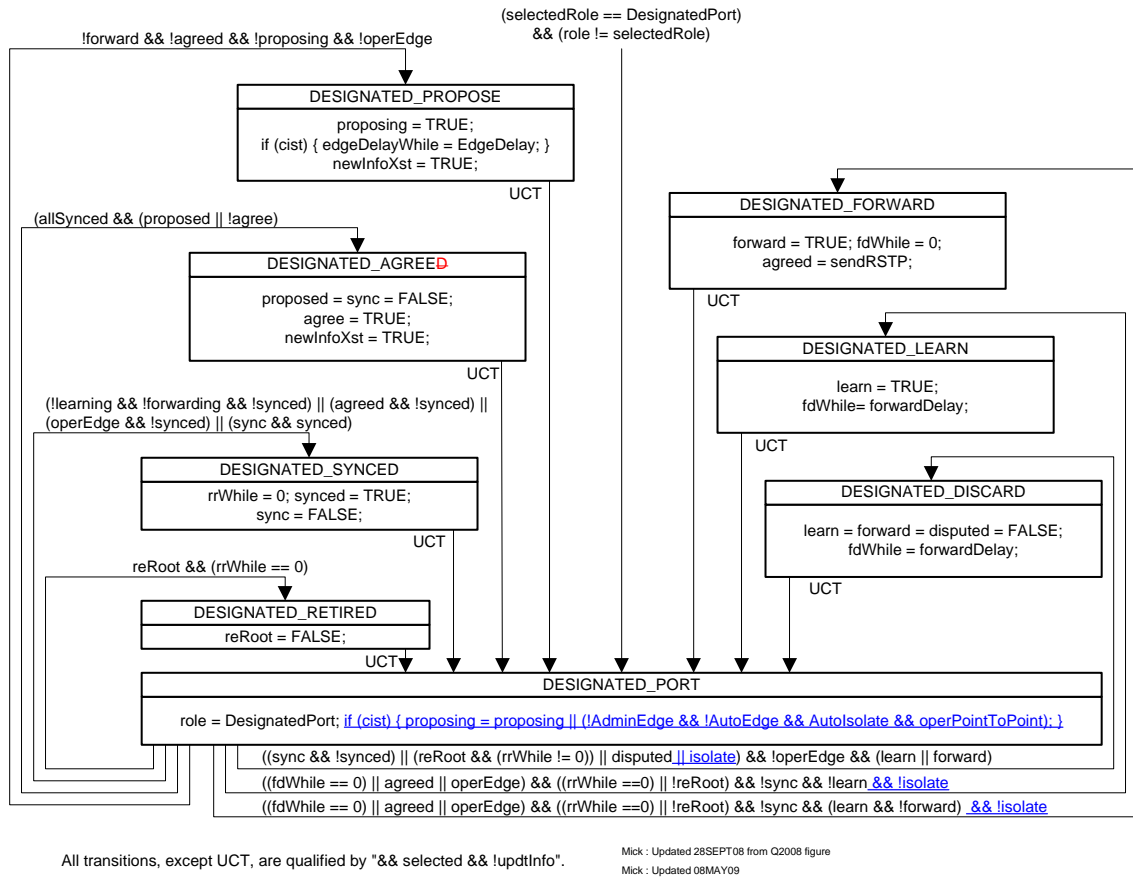


Figure 13-25—Port Role Transitions state machine—DesignatedPort

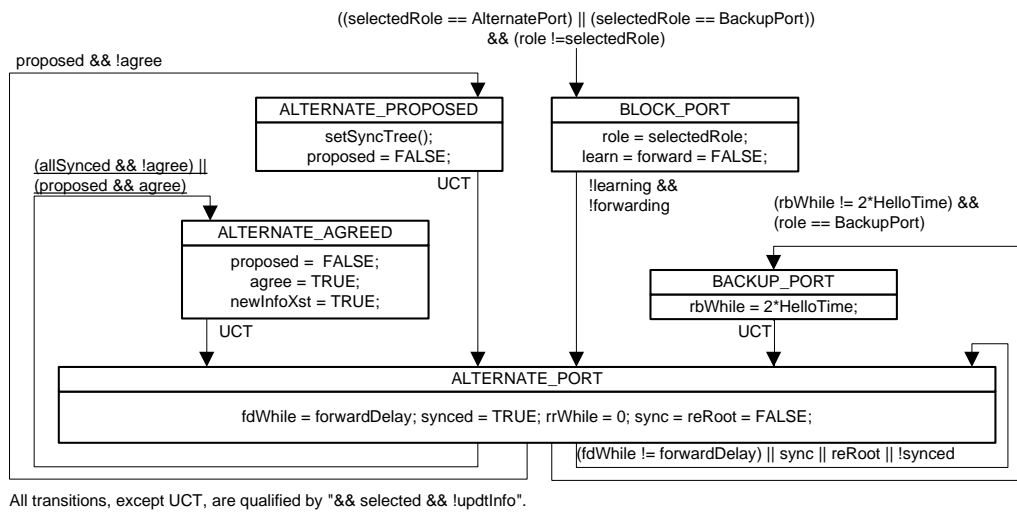


Figure 13-26—Port Role Transitions state machine—AlternatePort and BackupPort

13.38 Port State Transition state machine

The Port State Transition state machine shall implement the function specified by the state diagram contained in Figure 13-27 and the attendant definitions contained in 13.25 through 13.29.

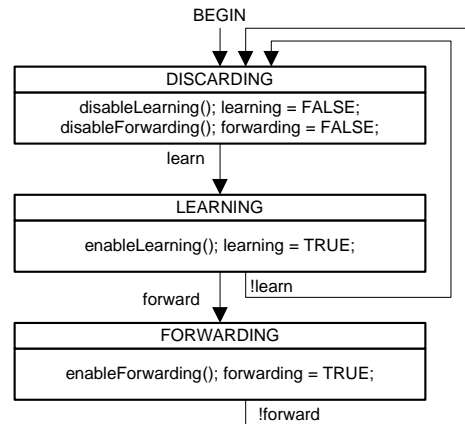


Figure 13-27—Port State Transition state machine

NOTE—A small system-dependent delay may occur on each of the transitions shown in the referenced state machine.

This state machine operates independently of the type of tree (CIST, MSTI, or SPT) and whether or not backbone bridging is being support. However the way in which the bridge supports the learn and forward variables and the disableForwarding(), disableLearning(), enableForwarding(), and enableLearning() procedures are supported does vary (see 8.4, 8.6, 8.6.1).

13.38.1 Port State transitions for the CIST and MSTI

The CIST and each MSTI are always supported by an explicit Port State, enforced by bridge's implementation of the Forwarding Process, and the procedures prompt that implementation to take the necessary action to forward and/or learn from received frames (as requested). The implementation reports its current state through the forward and learn variables.

13.38.2 Port State transitions for SPTs with learning

When an SPT is identified by an SPVID, i.e. is being used to support shortest path bridging with dynamic learning of station location, a Dynamic VLAN Registration Entry is created for each SPVID. The enableLearning() and disableLearning() procedures simply set (and clear) the learn variable, but enableForwarding() adds the port to the Dynamic VLAN Registration Entry before setting forward. Similarly disableForwarding() removes the port from the registration entry, and then clears forward.

13.38.3 Port State transitions for backbone SPTs

When frames with a given BVID are supported by shortest path backbone bridging (SPBB), MAC address based ingress filtering is used to discard a received frame for a given BVID and source address if there is no corresponding Dynamic Filtering Entry (8.8, 8.6.1) specifying the receiving port as a potential reception port. The Learning Process (8.7) neither creates or deletes Dynamic Filtering Entries for that BVID, and the the enableLearning() and disableLearning() procedures return without taking an action.

<<Need to check that we have the appropriate controls to disable learning and to use loop mitigation just for SPBB, the Qay mechanisms should be sufficient but check they are not too specific to PBB-TE.>>

1 ISIS-SPB identifies the port that provides the shortest path to a given bridge: this is the Root Port for the
2 SPT rooted at that bridge. The individual MAC addresses (there can be more than one) known to ISIS-SPB
3 as identifying sources for which that given bridge first transmits frames within the SPT Region (entering the
4 region from an attached bridge or station, or from a protocol entity within the bridge) or as identifying
5 destinations for which that bridge is the last recipient within the region (delivering frames to an attached
6 bridge or station, or to a protocol entity within the bridge) are associated with that Root Port. If loop
7 mitigation (6.5.4.2) is used for unicast frames, a Dynamic Filtering Entry is created for those addresses and
8 BVID, permitting forwarding through that port and no others, without reference to the state machines
9 specified in this clause (Clause 13), and the setting or clearing of the forward variable for any port. The
10 enableForwarding() procedure creates or modifies these Dynamic Filtering Entries, so that forwarding to and
11 from a given port is permitted, if and only if loop prevention (6.5.4.1) is used for both unicast and multicast
12 frames and the port's role is RootPort, and has no effect otherwise. Similarly if loop prevention is being used,
13 disableForwarding() modifies or removes any existing Dynamic Filtering Entry so that forwarding to or from
14 the port is not permitted.
15

16 NOTE—The Port Role Transition machine allows an SPT to transition a Root Port to Discarding in support of
17 enableForwarding() and disableForwarding() as specified in this clause (13.38.3). The need to specify that transition could
18 have been avoided by specifying that the Dynamic Filtering Entry would only permit forwarding through a given port if
19 forward was TRUE for the port for every other SPT for which it was a Designated Port. While equivalent, such a
20 specification approach would have been obscure and many implementors would have failed to spot the way to avoid
21 checking variables for all SPTs when processing a change for a single tree.

22 SPBB uses source specific multicast addresses, so that the destination address alone can be used to identify
23 the SPT (Clause 27) on egress, and a Static Filtering Entry (8.8.1) is created for that multicast address and
24 the BVIDs supported by the SPT. If enableForwarding() is invoked for a Designated Port, the Static Filtering
25 Entry's control element for that port is updated to specify that frames should be Forwarded through the port.
26 The control element is modified to specify Filtered if enableForwarding() is invoked and the port's role is not
27 Designated Port, or if disabledForwarding() is used.
28
29
30
31
32
33
34
35
36
37
38
39
40
41
42
43
44
45
46
47
48
49
50
51
52
53
54

13.39 Topology Change state machine

The Topology Change state machine for each tree shall implement the function specified by the state diagram contained in Figure 13-28 and the attendant definitions contained in 13.25 through 13.29.

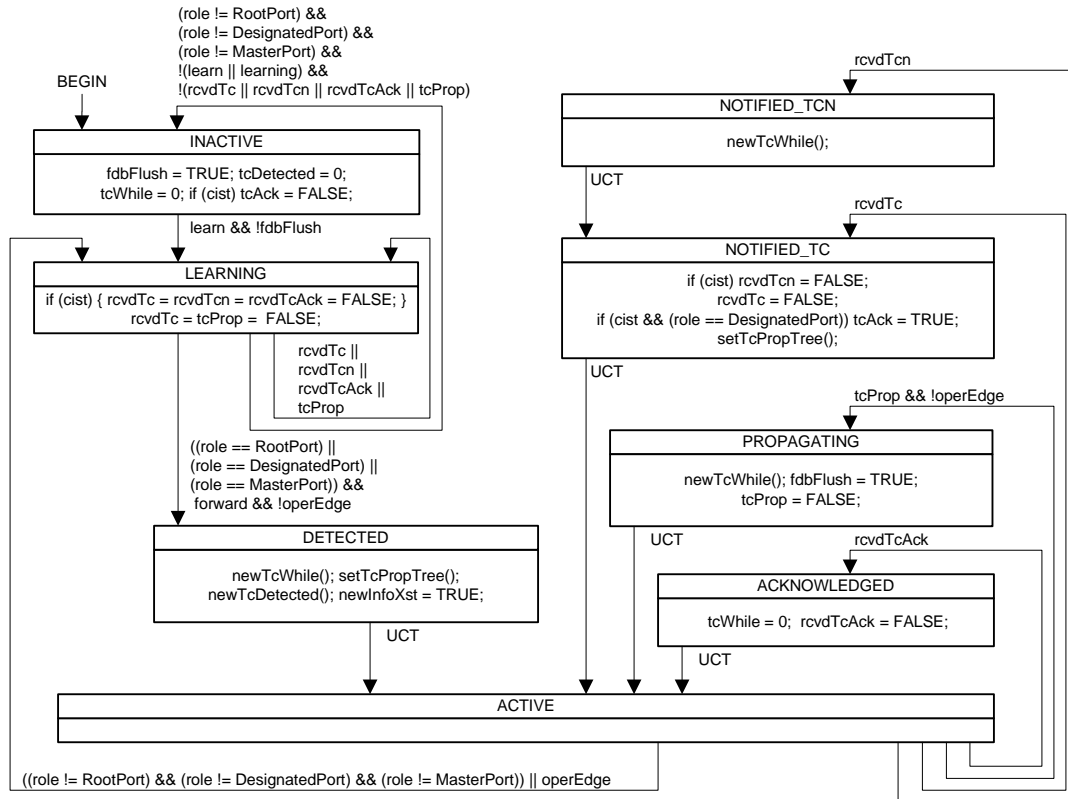


Figure 13-28—Topology Change state machine

NOTE—MRP (Clause 10) uses the tcDetected variable maintained by this state machine.

13.40 L2 Gateway Port Receive state machine

If implemented, the L2 Gateway Port state machine for each port shall implement the function specified by the state diagram contained in Figure 13-29 and the attendant definitions contained in 13.25 through 13.29. When activated, by setting isL2gp, it simulates continuous reception of BPDU carrying a spanning tree priority vector based on a configured pseudoRootID (13.27.47). As a result, an L2 Gateway Port that provides connectivity to a given service instance (3.117, 3.7) can only play one of two different roles:

- If the information is the best in the instance, the Layer Two Gateway Port is elected root port and will be in forwarding state; <<This is just utterly and completely wrong. It's backwards. If the information is better than any on the attached customer network the L2GP will be elected Root Port and will be Forwarding.>>
- Else, the port will have its disputed flag set and will remain in Designated Port role Discarding state.

A maximum of one Layer Two Gateway Port can thus be forwarding at a given time, provided its pseudo information is the best information advertised in the instance. A bridged network can be redundantly attached to a Provider Backbone Bridged Network (PBBN) (Clause 26) by the means of several Layer Two Gateway Ports. By way of communication within their region and without any influence from the PBBN,

those ports will provide connectivity to the PBBN through a single Layer Two Gateway Port, thus avoiding any bridging loop between the PBBN and the instance.

Proper configuration of a Layer Two Gateway Port requires setting the `isL2gp` and clearing the `enableBPDUtx` on that port. The variable `enableBPDUrx` for the port can be cleared on the port to provide complete independence from the information received from the PBBN. Else, the state machine ensures that the CIST information received is inferior to the pseudo information the Layer Two Gateway Port presents to itself on the CIST, and will block all instances (CIST and MSTIs) otherwise. This mechanism will prevent a misconfiguration from introducing a loop in the instance, but adds a dependency to the information circulating outside of the region.

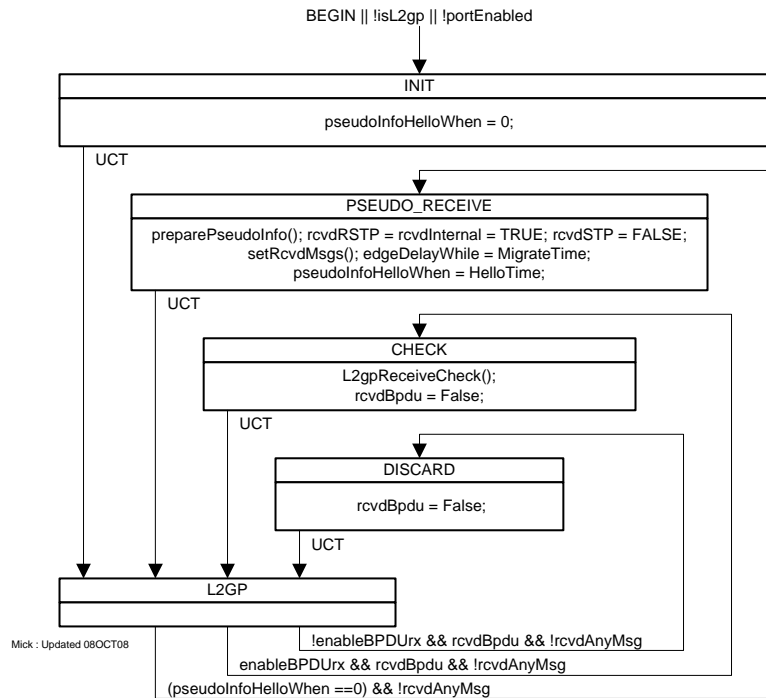


Figure 13-29—L2 Gateway Port Receive state machine

13.41 Customer Edge Port Spanning Tree operation

This subclause specifies the operation of the Spanning Tree Protocol Entity within a C-VLAN component that supports a Customer Edge Port (Figure 15-4) of a Provider Edge Bridge. The Customer Edge Port and each Provider Edge Port are treated as separate Bridge Ports by the spanning tree protocol.

If the C-VLAN component connects to the S-VLAN component with a single Provider Edge Port, and the associated service instance supports no more than two customer interfaces, then all frames (including Spanning Tree BPDUs) addressed to the Bridge Group Address may be relayed between the two ports of the C-VLAN component without modification. Otherwise, the Spanning Tree Protocol Entity shall execute RSTP, as modified by the provisions of this clause (13.41).

The RSTP enhancements specified do not reduce Provider Bridged Network connectivity between Customer Edge Ports to a single spanning tree of service instances but ensure that connectivity for frames assigned to any given C-VLAN is loop free. In this respect, the C-VLAN component's spanning tree protocol operation is equivalent to, but simpler to manage than, the operation of MSTP.

13.41.1 Provider Edge Port operPointToPointMAC and operEdge

The value of the adminPointToPointMAC parameter for a Provider Edge Port is always Auto, and no management control over its setting is provided. The value of the operPointToPointMAC parameter, used by the RSTP state machines, shall be true if the service instance corresponding to the Provider Edge Port connects at most two customer interfaces, and false otherwise.

The value of the AdminEdge, AutoEdge, and operEdge parameters for a Provider Edge Port are always false, true, and false, respectively. No management control over their setting is provided.

13.41.2 updtRolesTree()

The spanning tree priority vectors and timer values are calculated as specified for the updtRolesTree() procedure in IEEE Std 802.1D. The port role for each port, its port priority vector, and timer information are also updated as specified by IEEE Std 802.1D, with one exception. If selectedRole was to be set to AlternatePort, the port is an Provider Edge Port, and the root priority vector was derived from another Provider Edge Port, then the selectedRole shall be set to Root Port.

NOTE—The effect of this enhancement is to allow the C-VLAN component to have multiple Root Ports (just as if separate per S-VLAN trees were being provided), if they are all Provider Edge Ports. As the C-VLAN component assigns each frame to a single C-VLAN and maps any given C-VLAN to and from at most one Provider Edge Port, no loop is created.

13.41.3 setReRootTree(), setSyncTree(), setTcPropTree()

IEEE Std 802.1D specifies that the setReRootTree() and setSyncTree() procedures set the reRoot and sync variables for all ports of the bridge, and the setTcPropTree() sets the tcProp variable for all ports other than the port that invoked the procedure. If the port invoking the procedure is a Customer Edge Port, then this behavior is unchanged; if it is a Provider Edge Port, then the behavior of each procedure shall be as follows.

The setReRootTree() procedure sets reRoot for the port invoking the procedure and for the Customer Edge Port.

The setSyncTree() procedure sets sync for the port invoking the procedure and for the Customer Edge Port.

The setTcPropTree() procedure sets tcProp for the Customer Edge Port.

13.41.4 allSynced, reRooted

RSTP specifies a single value of the allSynced and reRooted state machine conditions for all Bridge Ports. This specification requires an independent value of each of these conditions for each port of the C-VLAN component. If that port is the Customer Edge Port, then allSynced shall be true if and only if synced is true for all Provider Edge Ports, and reRooted shall be true if and only if rrWhile is zero for all Provider Edge Ports. If the port for which the condition is being evaluated is a Provider Edge Port, then allSynced shall take the value of synced for the Customer Edge Port, and reRooted shall be true if and only if rrWhile is zero for the Customer Edge Port.

13.41.5 Configuration parameters

All configuration parameters for RSTP should be set to their recommended defaults, with the exception of the following, which are chosen to minimize the chance of interfering with the customer's configuration (e.g., by the C-VLAN component becoming the root of the customer spanning tree), as follows:

- c) The Bridge Priority (13.18, Table 13-3, 13.26.2) should be set to 61 440. This sets the priority part of the Bridge Identifier (the most significant 4 bits) to hex F.
- d) The following 12 bits (the Bridge Identifier system ID extension) should be set to hex FFF.
- e) The Port Priority (13.18, Table 13-3, 13.27.43) should be set to 32. This sets the priority part of the Port Identifier (the most significant 4 bits) to hex 2, a higher priority than the default (128, or hex 8).
- f) The Port Path Cost values for Provider Edge Ports should be set are to 128.

All BPDUs generated by the Spanning Tree Protocol Entity within a C-VLAN component use the MAC address of the Customer Edge Port as a source address. For each internal Provider Edge Port, the protocol uses the S-VID associated with the corresponding internal Customer Network Port on the S-VLAN component as a port number. For the Customer Edge Port, the value 0xFFFF is used as the port number.

13.42 Virtual Instance Port Spanning Tree operation

This subclause specifies the operation of the Spanning Tree Protocol Entity within an I-component in a Backbone Edge Bridge. The Customer Network Ports (CNP) and Virtual Instance Ports (VIP) are treated as separate Bridge Ports by the spanning tree protocol.

If the I-component has a single CNP and a single VIP supported by a point-to-point backbone service instance, then all frames (including Spanning Tree BPDUs) addressed to the Bridge Group address may be relayed between the two ports of the I-component without modification. Otherwise, the Spanning Tree Protocol Entity shall execute RSTP, as modified by the provisions of this subclause.

The RSTP enhancements specified ensure that connectivity for frames assigned to any given S-VLAN is loop free.

The parameters and functions of the RSTP protocol used on the VIPs get the same values and functionality as defined for Provider Edge Ports of a C-VLAN component as defined in 13.41. The Bridge Identifier Priority and system ID extension get the values specified in 13.41.5. These changes in the RSTP protocol ensure that no VIP is blocked due to the operation of the RSTP protocol and the I-component will never be elected as root.

NOTE—The effect of not blocking any VIP in the I-component (never set the port role alternate to a VIP) will not cause a loop since the I-component maps any given S-VID to at most one VIP.

13.43 L2 Gateway Ports

<<place-holder, to be consistent with the other state machines the general description of L2GP should move here, just leaving the L2GPRX machine where it is>>

1
2
3
4
5
6
7
8
9
10
11
12
13
14
15
16
17
18
19
20
21
22
23
24
25
26
27
28
29
30
31
32
33
34
35
36
37
38
39
40
41
42
43
44
45
46
47
48
49
50
51
52
53
54