

IEEE P802.1CBdb
(individual contribution)
March 13, 2019

Frame Replication and Elimination for Reliability — Amendment:

Extended Stream identification functions

Abstract: This standard specifies procedures, managed objects and protocols for bridges and end systems that provide identification and replication of packets for redundant transmission, identification of duplicate packets, and elimination of duplicate packets. It is not concerned with the creation of the multiple paths over which the duplicates are transmitted.

Keywords: TSN, Time-Sensitive Networking, Redundancy, Bridging, Bridges, Frame Replication, Frame Elimination, Bridged Local Area Networks, IEEE 802®, IEEE 802.1Q™, IEEE 802.1CB™, local area networks (LANs), MAC Bridges, Virtual Bridged Local Area Networks (virtual LANs).

1	1.	Overview	2
2	1.1	Scope	2
3	1.2	Rationale	2
4	1.6	Introduction	2
5	2.	Normative references	3
6	3.	Definitions	4
7	4.	Acronyms and abbreviations	5
8	5.	Conformance	6
9	5.5	Stream identification component optional behaviors	6
10	5.8	Talker end system optional behaviors	6
11	5.11	Listener end system optional behaviors	6
12	5.13	Relay system recommended behaviors	6
13	6.	Stream identification	8
14	6.1	Stream service subparameters	9
15	6.8	Extended Stream identification	9
16	8.	Frame Replication and Elimination for Reliability in Bridges	10
17	8.2	FRER C-component input transformations	10
18	9.	Stream Identification Management	11
19	9.1	Stream identity table	11
20	9.1.1	tsnStreamIdEntry	11
21	9.1.6	Managed objects for Extended Stream identification	11
22	9.1.6.1	tsnCpeEsIdDestMacMask	11
23	9.1.6.2	tsnCpeEsIdDestMacMatch	11
24	9.1.6.3	tsnCpeEsIdSrcMacMask	12
25	9.1.6.4	tsnCpeEsIdSrcMacMatch	12
26	9.1.6.5	tsnCpeEsIdTagged	12
27	9.1.6.6	tsnCpeEsIdVlanIdMask	12
28	9.1.6.7	tsnCpeEsIdVlanIdMatch	12
29	9.1.6.8	tsnCpeEsIdMsduFieldNb	12
30	9.1.6.9	tsnCpeEsIdMsduFieldN	13
31	9.1.6.9.1	tsnCpeEsIdMsduFieldOffsetN	13
32	9.1.6.9.2	tsnCpeEsIdMsduFieldLengthN	13
33	9.1.6.10	tsnCpeEsIdMsduFieldValueN	13
34	Annex A (normative)	Protocol Implementation Conformance Statement (PICS)	
35	proforma	14	
36	A.2	PICS proforma for Frame Replication and Elimination for Reliability	14
37	A.2.2	Stream identification component	14
38	A.2.3	Talker end system	15
39	A.2.4	Listener end system	16
40	A.2.5	Relay system	17
41	Annex C (informative)	Frame Replication and Elimination for Reliability in systems.....	20
42	C.2	Example 2: Various stack positions	20
43	C.5	Example 5: Protocol interworking	20

1 IEEE Draft Standard for Local and metropolitan 2 area networks — Frame Replication and 3 Elimination for Reliability — Amendment: 4 Extended Stream Identification 5 Functions

6

7

8 1. Overview

9 1.1 Scope

10 This amendment specifies procedures and managed objects that add new stream identification functions.
11 Additionally this amendment addresses errors and clarifications.

12 1.2 Rationale

13 Stream identification is required by an increasing number of traffic management mechanisms implemented
14 in Layer 2: ingress policing, traffic scheduling, congestion management, mapping to traffic classes, that
15 make Ethernet networks suitable for a growing number of applications. Current stream identification
16 methods defined in IEEE Std 802.1CB are insufficient for some of these applications.

17 1.6 Introduction

18 This amendment defines an additional passive stream identification function, which input parameters are not
19 limited to the addressing parameters provided by the EISS indication primitive (destination_address,
20 source_address and vlan_identifier) and, or, to some specific upper layer protocol (e.g. IP) information. The
21 Extended Stream identification function is based on a mask-and-match scheme, where a set of masks is first
22 applied to a subset of the parameters passed by the EISS primitive: destination_address, source_address,
23 vlan_identifier and mac_service_data_unit. The resulting masked information fields are then compared
24 against a set of values, one for each mask, that identify a particular Stream. Masks and match values are
25 defined by managed objects.

26 << Editor's Note: TBC >>

2. Normative references

The following referenced documents are indispensable for the application of this document (i.e., they must be understood and used, so each referenced document is cited in text and its relationship to this document is explained). For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments or corrigenda) applies. Non-normative references (i.e., that provide additional information not required for the application of this document) are given in Annex D.

IEEE Std 802[®], IEEE Standard for Local and metropolitan area networks: Overview and Architecture.^{1,2}

IEEE Std 802.1AC[™], IEEE Standard for Local and metropolitan area networks—Media Access Control (MAC) Service Definition.

IEEE Std 802.1Q[™], IEEE Standard for Local and metropolitan area networks—Bridges and Bridged Networks.

<< Editor's Note: other normative references will be added, as appropriate >>

13

¹The IEEE standards or products referred to in Clause 2 are trademarks owned by The Institute of Electrical and Electronics Engineers, Incorporated.

²IEEE publications are available from The Institute of Electrical and Electronics Engineers (<http://standards.ieee.org>).

¹ **3. Definitions**

² << Editor's Note: Definitions will be added, as appropriate >>

³ **Mask:** aaabbb

⁴

⁵

1 4. Acronyms and abbreviations

2 << Editor's Note: to be added to the existing list >>

3 XXX Text

5 YYYY Text

7

1 5. Conformance

2 This clause specifies the mandatory and optional capabilities provided by conformant implementations of
3 this standard.

4 5.5 Stream identification component optional behaviors

5 *Insert new item d) as shown and re-number subsequent items:*

- 6 a) The items in 5.3 and 5.4 on more than one port;
- 7 b) The items in 5.3 and 5.4 for some number of Compound Streams greater than 1;
- 8 c) An IP Stream identification function (6.7); ~~and/or~~
- 9 d) [An Extended Stream identification function \(crossref\)](#); and/or
- 10 e) Additional types of Stream identification functions.

11 5.8 Talker end system optional behaviors

12 *Insert new item d) as shown and re-number subsequent items:*

- 13 a) The items in 5.8 and 5.7 on more than one port;
- 14 b) The items in 5.8 and 5.7 for some number of Compound Streams greater than 1;
- 15 c) An IP Stream identification function (6.7);
- 16 d) [An Extended Stream identification function \(crossref\)](#);
- 17 e) Additional types of Stream identification functions;
- 18 f) The HSR sequence tag (7.9);
- 19 g) The PRP sequence trailer (7.10); and/or
- 20 h) Additional types of Sequence encode/decode functions.

21 5.11 Listener end system optional behaviors

22 *Insert new item d) as shown and re-number subsequent items:*

- 23 a) The items in 5.11 and 5.10 on more than one port;
- 24 b) The items in 5.11 and 5.10 for some number of Compound Streams greater than 1;
- 25 c) An IP Stream identification function (6.7);
- 26 d) [An Extended Stream identification function \(crossref\)](#);
- 27 e) Additional types of Stream identification functions;
- 28 f) The HSR sequence tag (7.9);
- 29 g) The PRP sequence trailer (7.10);
- 30 h) Additional types of Sequence encode/decode functions; and/or
- 31 i) At least two instances of Individual recovery functions (7.5), each using the
- 32 VectorRecoveryAlgorithm (7.4.3.4).

33 5.13 Relay system recommended behaviors

34 *Insert new item c) as shown:*

- 35 a) Active Destination MAC and VLAN Stream identification functions (6.6) for encoding and
- 36 decoding packets; and
- 37 b) IP Stream identification functions (6.7); ~~or~~

- 1 c) [Extended Stream identification function \(crossref\)](#) for identifying packets.
- 2 NOTE—IP Stream identification enables a relay system to proxy for a FRER-unaware end system.
- 3

1 6. Stream identification

2 *Change the text of the first paragraph as shown:*

3 Clause 7 of IEEE Std 802.1AC describes the IEEE 802.1 layering model, that Frame Replication and
 4 Elimination for Reliability (FRER) follows. Stream identification utilizes a single Service Access Point
 5 (SAP) to a connectionless packet service offered by the layer below it [e.g., the Intermediate Sublayer
 6 Service (ISS) of Clause 11 of IEEE Std 802.1AC, or the Enhanced Internal Sublayer Service (EISS) of
 7 Clause 6.8 of IEEE Std], and offers an array of SAPs to the layers above it, corresponding to different
 8 Streams. The Stream identification model is illustrated in Figure 6-1.

9 *Change the text of the note as shown:*

10 NOTE—In principle, any number of different methods for identifying and encoding Streams can be defined. Several
 11 required methods are specified in the following subclauses (6.4, 6.5, 6.6, 6.9, crossref).

12 *Change the text of item c) and Table 6-1 as shown:*

13 c) ~~Four~~Five specific IP Stream identifications are described: Null Stream identification (6.4), Source
 14 MAC and VLAN Stream identification (6.5), Active Destination MAC and VLAN Stream
 15 identification (6.6), ~~and~~IP Stream identification (6.9), and Extended Stream identification
 16 (crossref).

17 .

Table 6-1—IP Stream identifications

IP Stream identification	Active/passive	Examines	Overwrites	Reference
Null Stream identification	Passive	destination_address, vlan_identifier	None	6.4, 9.1.2
Source MAC and VLAN Stream identification	Passive	source_address, vlan_identifier	None	6.5, 9.1.6
Active Destination MAC and VLAN Stream identification	Active	destination_address, vlan_identifier	destination_address, vlan_identifier, priority	6.6, 9.1.4
IP Stream identification	Passive	destination_address, vlan_identifier, IP source address, IP destination address, DSCP, IP next protocol, source port, destination port	None	6.9, 9.1.5
<u>Extended Stream identification function</u>	<u>Passive</u>	<u>destination_address, source_address, vlan_identifier, mac - service_data_unit</u>	<u>None</u>	<u>6.8, 9.1.6</u>

18 << Editor's Note: cross-references to be updated >>

1 6.1 Stream service subparameters

2 *Change the text of the first paragraph as shown:*

3 The ISS defined in IEEE Std 802.1AC ~~and the EISS defined in IEEE Std 802.1Q~~ includes a
4 connection_identifier parameter that is of local significance (to a system) only. The parameter is not carried
5 across the underlying service. Stream identification makes use of this parameter to carry parametrized
6 information. Stream identification has need for more than one subparameter, but an implementor can create
7 mathematical algorithms to combine those subparameters (and/or other subparameters for other layers) into
8 a single connection_identifier parameter, especially since the connection_identifier's values are undefined
9 outside the system implementing them. In this document, parameters that are assumed to be encoded in the
10 connection_identifier are deemed *subparameters*.

11 *Insert new clause 6.8 as shown:*

12 6.8 Extended Stream identification

13 The Extended Stream identification is a passive Stream identification that operates at the frame level. It can
14 be defined using the Enhanced Internal Sublayer Service (EISS) described in 6.9 of IEEE Std 802.1Q-2018,
15 in which case it is enhanced with the extra stream_handle subparameter of the connection_identifier,
16 specified in 6.1 of the present standard.

17 It discards the stream_handle subparameter passed down the stack. It generates a stream_handle
18 subparameter on frames passed up the stack based on information fields extracted from the frame's
19 destination MAC address, source MAC address, VLAN ID and MAC service data unit. It does not change
20 any of a packet's parameters. It is suitable for applications in which Streams are defined by a set of
21 parameters derived from those provided through the EISS SAP. This parameter set includes a bit field of the
22 destination MAC address, a bit field of the source MAC address, a bit field of the VLAN identifier and a set
23 of bit fields of the MAC service data unit. In order to instantiate the Extended Stream identification function,
24 the tsnStreamIdIdentificationType managed object (9.1.1.6) is encoded using the OUI (00-80-C2) and the
25 type values as shown in Table 9-1.

26 Extended Stream identification can be coupled, for example, with Active Destination MAC and VLAN
27 Stream identification (6.6) to assign a particular {MAC address, VLAN, priority} triplet to packets
28 belonging to a particular unicast application Stream identified by the combination of the values of particular
29 fields in the MAC service data unit, as shown in Figure 8-1, Port A, where Extended Stream identification
30 would be in the box labeled "Passive Upper Extended Stream identification (6.8)." The managed objects for
31 Extended Stream identification are described in (crossref 9.1.6).

32 NOTE—The drop_eligible parameter is also present, along with the VLAN identifier and priority, in an IEEE 802.1Q
33 VLAN tag. FRER does not affect the use of this parameter. It passes through Extended Stream identification unchanged,
34 and defaults to False when not present.

35

1 **8. Frame Replication and Elimination for Reliability in Bridges**

2 *Change paragraph of clause 8.2 as shown:*

3 **8.2 FRER C-component input transformations**

4 The Input transformations, marked with white boxed with boldface type in Figure 8-1, enable a Bridge to
5 proxy for a non-FRER-capable end system. The expanded input port identifies packets belonging to a
6 Stream (e.g., using IP Stream identification, [6.7, or Extended Stream identification, crossref 6.8](#)), serializes
7 the packets with a Sequence generation function (7.4.1), encodes the sequence number with an R-TAG
8 (7.8), and then gives the packets belonging to this Stream a {vlan_identifier, destination_mac_address} pair
9 that is unique, at least inside this Bridge, using Active Destination MAC and VLAN Stream identification
10 (6.6). The IEEE 802.1Q Forwarding Process, enhanced with the Individual recovery function (7.5) and
11 Sequence recovery function (7.4.2), then forwards the frame.

12

1 9. Stream Identification Management

2 9.1 Stream identity table

3 9.1.1 tsnStreamIdEntry

4 *Insert new row in Table 9-1 as shown:*

5

Table 9-1—Stream identification types

OUI/CID	Type number	Stream identification function	Controlling parameters
00-80-C2	0	Reserved	—
00-80-C2	1	Null Stream identification (6.4)	9.1.2
00-80-C2	2	Source MAC and VLAN Stream identification (6.5)	9.1.6
00-80-C2	3	Active Destination MAC and VLAN Stream identification (6.6)	9.1.4
00-80-C2	4	IP Stream identification (6.7)	9.1.5
<u>00-80-C2</u>	<u>5</u>	<u>Extended Stream identification (crossref 6.8)</u>	<u>(crossref 9.1.6)</u>
00-80-C2	5–255	Reserved	—
other	—	Defined by entity owning the OUI or CID	—

6 *Insert Clause 9.1.6 as shown:*

7 9.1.6 Managed objects for Extended Stream identification

8 When instantiating an instance of the Extended Stream identification function (crossref 6.8) for a particular
9 input Stream, the managed objects in the following subclauses serve as the tsnStreamIdParameters managed
10 object (9.1.1.2).

11 9.1.6.1 tsnCpeEsIdDestMacMask

12 Specifies a 48-bit mask to be applied to the destination_address parameter passed by the EISS indication
13 primitive to the Extended Stream identification function. A bit set to '1' in tsnCpeEsIdDestMacMask
14 indicates that the bit with the same position in the destination_address parameter must match the bit with the
15 same position in tsnCpeEsIdDestMacMatch (crossref 9.1.6.2). A bit set to '0' in tsnCpeEsIdDestMacMask
16 indicates that the bit with the same position in the destination_address parameter is ignored. An all-0
17 tsnCpeEsIdDestMacMask indicates that the destination_address parameter is ignored.

18 9.1.6.2 tsnCpeEsIdDestMacMatch

19 Specifies the 48-bit value that the destination_address parameter, passed by the EISS indication primitive to
20 the Extended Stream identification function, must match according to the masking rules defined in (crossref
21 9.1.6.1).

1 9.1.6.3 tsnCpeEsIdSrcMacMask

2 Specifies a 48-bit mask to be applied to the source_address parameter passed by the EISS indication
3 primitive to the Extended Stream identification function. A bit set to '1' in tsnCpeEsIdSrcMacMask
4 indicates that the bit with the same position in the source_address parameter must match the bit with the
5 same position in tsnCpeEsIdSrcMacMatch (crossref 9.1.6.4). A bit set to '0' in tsnCpeEsIdSrcMacMask
6 indicates that the bit with the same position in the source_address parameter is ignored. An all-0
7 tsnCpeEsIdSrcMacMask indicates that the source_address parameter is ignored.

8 9.1.6.4 tsnCpeEsIdSrcMacMatch

9 Specifies the 48-bit value that the source_address parameter, passed by the EISS indication primitive to the
10 Extended Stream identification function, must match according to the masking rules defined in (crossref
11 9.1.6.3).

12 9.1.6.5 tsnCpeEsIdTagged

13 An enumerated value indicating whether a frame in an EISS indication primitive to the Extended Stream
14 identification function is permitted to have a VLAN tag. It can take the following values:

- 15 1) **tagged:** A frame must have a VLAN tag to be recognized as belonging to the Stream.
- 17 2) **priority:** A frame must be untagged, or have a VLAN tag with a VLAN ID = 0 to be
19 recognized as belonging to the Stream.
- 20 3) **all:** A frame is recognized as belonging to the Stream whether tagged or not.

22 << Editor's Note: this object provides a work-around to determine if a frame is VLAN-tagged. >>

23 9.1.6.6 tsnCpeEsIdVlanIdMask

24 Specifies a 12-bit mask to be applied to the vlan_identifier parameter passed by the EISS indication
25 primitive to the Extended Stream identification function. A bit set to '1' in tsnCpeEsIdVlanIdMask indicates
26 that the bit with the same position in the vlan_identifier parameter must match the bit with the same position
27 in tsnCpeEsIdVlanIdMatch (crossref 9.1.6.7). A bit set to '0' in tsnCpeEsIdVlanIdMask indicates that the
28 bit with the same position in the vlan_identifier parameter is ignored. An all-0 tsnCpeEsIdVlanIdMask
29 indicates that the vlan_identifier parameter is ignored.

30 9.1.6.7 tsnCpeEsIdVlanIdMatch

31 Specifies the 12-bit value that the vlan_identifier parameter, passed by the EISS indication primitive to the
32 Extended Stream identification function, must match according to the masking rules defined in (crossref
33 9.1.6.6).

34 9.1.6.8 tsnCpeEsIdMsduFieldNb

35 Specifies the number of bit fields in the mac_service_data_unit parameter of the EISS indication primitive to
36 the Extended Stream identification function to be used to identify the Stream. A value of 0 indicates that the
37 mac_service_data_unit parameter is not used by the Extended Stream identification function.
38 tsnCpeEsIdMsduFieldNb has a maximum value of XXX. If tsnCpeEsIdMsduFieldNb has a value N greater
39 than 0, then N bit fields shall be defined using N mask definitions (tsnCpeEsIdMsduField1, ...,
40 tsnCpeEsIdMsduFieldN (crossref 9.1.6.9)), and N matching values shall be defined by
41 tsnCpeEsIdMsduFieldValue1, ..., tsnCpeEsIdMsduFieldValueN (crossref 9.1.6.10)

42 << Editor's Note: XXX to be fixed. >>

1 **9.1.6.9 tsnCpeEsIdMsduFieldN**

2 Specifies a series of consecutive bits of the mac_service_data_unit parameter passed by the EISS indication
3 primitive to the Extended Stream identification function. tsnCpeEsIdMsduFieldN is defined using two other
4 objects indicating the location (tsnCpeEsIdMsduFieldOffsetN, (crossref 9.1.6.9.1)) and length
5 (tsnCpeEsIdMsduFieldLengthN, (crossref 9.1.6.9.2)) of the bit field.

6 **9.1.6.9.1 tsnCpeEsIdMsduFieldOffsetN**

7 Specifies the offset, expressed in bits and relative to the first bit of the mac_service_data_unit parameter, of
8 the first bit of tsnCpeEsIdMsduFieldN. A value of i indicates that the first bit of tsnCpeEsIdMsduFieldN is
9 the $(i+1)^{\text{th}}$ bit of the mac_service_data_unit parameter. tsnCpeEsIdMsduFieldOffsetN has a value comprised
10 between 0 and XXX.

11 << Editor's Note: XXX has to be fixed >>

12 **9.1.6.9.2 tsnCpeEsIdMsduFieldLengthN**

13 Specifies the length, expressed in bits, of tsnCpeEsIdMsduFieldN. tsnCpeEsIdMsduFieldLengthN has a
14 value comprised between 1 and XXX.

15 << Editor's Note: XXX has to be fixed >>

16 **9.1.6.10 tsnCpeEsIdMsduFieldValueN**

17 Specifies the value of tsnCpeEsIdMsduFieldN, as defined in (crossref 9.1.6.9), that participates to the
18 Stream identification by the Extended Stream identification function.

19

1 Annex A

2 (normative)

3 Protocol Implementation Conformance Statement (PICS)

4 proforma

5 A.2 PICS proforma for Frame Replication and Elimination for Reliability

6 A.2.2 Stream identification component

7 *Insert item IS5 and re-number subsequent entries in Table as shown:*

Item	Feature	Subclause	Value/Comment	Status	Support
IS1	Can the system identify frames using the Null Stream identification function?	5.3:b, 6.4		IS: M	Yes []
IS2	Does the system implement the required managed objects of Clause 9?	5.3:c, 9		IS: M	Yes []
IS3	Can the system encode frames using the Active Destination MAC and VLAN Stream identification?	5.4:a, 6.6		IS: O	Yes [] No [] — ¹
IS4	Can the system identify packets using the IP Stream identification?	5.5:c, 6.7		IS: O	Yes [] No []
IS5	<u>Can the system identify packets using the Extended Stream identification [crossref]?</u>	<u>5.5:d, 6.8</u>		<u>IS: O</u>	<u>Yes []</u> <u>No []</u>
IS6	For what additional Stream decodings can the system be configured?	5.5:e		IS: O	—
IS7	Explain the limits on which ports the above features can be configured.	5.5:a		IS: O	—
IS8	Explain the limits on the number of Streams for which the above features can be configured.	5.5:b		IS: O	—

¹If “No,” supply a reason why.

1 A.2.3 Talker end system

2 *Insert item TE16 and re-number subsequent entries in Table as shown:*

Item	Feature	Subclause	Value/Comment	Status	Support
TE9	Can the system identify frames using the Null Stream identification function?	5.6:b, 6.4		TE: M	Yes []
TE10	Can the system be configured with a Sequence generation function?	5.6:c, 7.4.1		TE: M	Yes []
TE11	Can the system be configured with a Sequence encode/decode function?	5.6:d, 7.8		TE: M	Yes []
TE12	Does the system implement the managed objects of Clause 9 and Clause 10 (10.7 not required)?	5.6:e, 9, 10		TE: M	Yes []
TE13	Can the system encode frames using the Active Destination MAC and VLAN Stream identification?	5.7:a, 6.6		TE: O	Yes [] No [] — ¹
TE14	Can the system be configured with a Stream splitting function?	5.7:b, 7.7		TE: M	Yes [] No [] — ^a
TE15	Can the system identify packets using the IP Stream identification?	5.8:c, 6.7		TE: O	Yes [] No []
TE16	Can the system identify packets using the Extended Stream identification [crossref]?	5.8:d, 6.8		TE: O	Yes [] No []
TE17	For what additional Stream decodings can the system be configured?	5.8:e		TE: O	—
TE18	Can the system encode frames using HSR sequence tag?	5.8:f, 7.9		TE: O	Yes [] No []
TE19	Can the system encode frames using PRP sequence trailer?	5.8:g, 7.10		TE: O	Yes [] No []
TE20	For what additional Sequence encode/decode functions can the system be configured?	5.8:h		TE: O	—
TE21	Explain the limits on which ports the above features can be configured.	5.8:a		TE: O	—
TE22	Explain the limits on the number of Streams for which the above features can be configured.	5.8:b		TE: O	—

¹If “No,” supply a reason why.

1 A.2.4 Listener end system

2 *Insert item LE11 and re-number subsequent entries in Table as shown:*

Item	Feature	Subclause	Value/Comment	Status	Support
LE1	Can the system identify frames using the Null Stream identification?	5.9:b, 6.4		LE: M	Yes []
LE2	Can the system be configured with at least two Individual recovery functions?	5.9:c, 7.5		LE: M	Yes []
LE3	Can the system be configured with at least one Sequence recovery function using the MatchRecoveryAlgorithm?	5.9:c, 7.4.2, 7.4.3.5		LE: M	Yes []
LE4	Does the system support the Sequence recovery function using the VectorRecoveryAlgorithm with a value of $\text{frerSeqRcvyHistoryLength} \geq 2$?	5.9:c, 7.4.2, 7.4.3.4		LE: M	Yes []
LE5	Can the system be configured with at least two Individual recovery functions using the MatchRecoveryAlgorithm?	5.9:d, 7.5, 7.4.3.5		LE: M	Yes []
LE6	Can the system be configured with a Sequence decoding function?	5.9:e, 7.8		LE: M	Yes []
LE7	Does the system implement the managed objects of Clause 9 and Clause 10 (10.7 not required)?	5.9:f, 9, 10		LE: M	Yes []
LE8	Does the Base recovery function process a frame before its FCS has been verified?	7.4.3		LE: M	No []
LE9	Can the system decode frames using the Active Destination MAC and VLAN Stream identification?	5.10:a, 6.6		LE: O	Yes [] No [] — ¹
LE10	Can the system decode packets using the IP Stream identification?	5.11:c, 6.7		LE: O	Yes [] No []
LE11	Can the system identify packets using the Extended Stream identification [crossref]?	5.11:d, 6.8		LE: O	Yes [] No []
LE12	For what additional Stream decodings can the system be configured?	5.11:e		LE: O	—
LE13	Can the system decode frames using HSR sequence tag?	5.11:f, 7.9		LE: O	Yes [] No []
LE14	Can the system decode frames using PRP sequence trailer?	5.11:g, 7.10		LE: O	Yes [] No []

Item	Feature	Subclause	Value/Comment	Status	Support
LE15	For what additional Sequence decodings can the system be configured?	5.11:h		LE: O	—
LE16	Can the system be configured with at least two Individual recovery functions using the VectorRecoveryAlgorithm?	5.11:i, 7.5, 7.4.3.4		LE: O	Yes []
LE17	Explain the limits on which ports the above features can be configured.	5.11:a		LE: O	—
LE18	Explain the limits on the number of Streams for which the above features can be configured.	5.11:b		LE: O	—

¹If “No,” supply a reason why.

¹ A.2.5 Relay system

² Insert item RS12 and re-number subsequent entries in Table as shown:

Item	Feature	Subclause	Value/Comment	Status	Support
RS1	Can the system identify frames using the Null Stream identification function?	5.12:b, 6.4		RS: M	Yes []
RS2	Can the system be configured with a Sequence generation function?	5.12:c, 7.4.1		RS: M	Yes []
RS3	Can the system be configured with at least two Individual recovery functions?	5.12:e, 7.5		RS: M	Yes []
RS4	Can the system be configured with at least one Sequence recovery function using the MatchRecoveryAlgorithm?	5.12:e, 7.4.2, 7.4.3.5		RS: M	Yes []
RS5	Does the system support the Sequence recovery function using the VectorRecoveryAlgorithm with a value of $\text{frerSeqRcvyHistoryLength} \geq 2$?	5.12:e, 7.4.2, 7.4.3.4		RS: M	Yes []
RS6	Can the system be configured with at least two Individual recovery functions using the MatchRecoveryAlgorithm?	5.12:f, 7.5, 7.4.3.5		RS: M	Yes []
RS7	Can the system be configured with a Sequence encode/decode function?	5.12:d, 7.8		RS: M	Yes []

Item	Feature	Subclause	Value/Comment	Status	Support
RS8	Does the system implement the managed objects of Clause 9 and Clause 10 (including 10.7)?	5.12:g, 9, 10		RS: M	Yes []
RS9	Does the Base recovery function process a frame before its FCS has been verified?	7.4.3		RS: M	No []
RS10	Can the system encode/decode frames using the Active Destination MAC and VLAN Stream identification?	5.13:a, 6.6		RS: O	Yes [] No [] — ¹
RS11	Can the system identify packets using the IP Stream identification?	5.13:b, 6.7		RS: O	Yes [] No [] — ^a
RS12	Can the system identify packets using the Extended Stream identification [crossref]?	5.13:c, 6.8		RS: O	Yes [] No [] — ^a
RS13	For what additional Stream identification functions can the system be configured?	5.14:c		RS: O	—
RS14	Can the Stream splitting function be configured on the system?	5.14:d, 7.7		RS: O	Yes [] No []
RS15	Can the system encode/decode frames using HSR sequence tag?	5.14:e, 7.9		RS: O	Yes [] No []
RS16	Can the system encode/decode frames using PRP sequence trailer?	5.14:f, 7.10		RS: O	Yes [] No []
RS17	For what additional Sequence encode/decode functions can the system be configured?	5.14:g		RS: O	—
RS18	Can the system be configured with at least two Individual recovery functions using the VectorRecoveryAlgorithm?	5.14:i, 7.5, 7.4.3.4		RS: O	Yes [] No []
RS19	Can the system be configured for Autoconfiguration via the Managed objects for autoconfiguration?	5.14:j, 7.11, 10.7		RS: O	Yes [] No []
RS20	Explain the limits on which ports the above features can be configured.	5.14:a		RS: O	—
RS21	Explain the limits on the number of Streams for which the above features can be configured.	5.14:b		RS: O	—
RS22	Explain the limits on whether the above features can be configured at in-facing or out-facing positions.	5.14:h		RS: O	—

¹If “No,” supply a reason why.

1

1 Annex C

2 (informative)

3 Frame Replication and Elimination for Reliability in systems

4 C.2 Example 2: Various stack positions

5 *Change 3rd paragraph of clause C.2, and Figure C-5 as shown:*

6 Figure C-5 illustrates relay system B in Figure C-4. As the packets enter from the left, from End System A,
 7 they pass first through a Stream identification function [IP Stream identification (6.7), or Extended Stream
 8 identification (crossref 6.8)], which identifies the Stream. The Stream Transfer Function delivers the packet
 9 with all TSN parameters, including the stream_handle subparameter, to the Sequence generation function
 10 (7.4.1, marked “Seq.” in Figure C-4), which adds a sequence_number subparameter with a steadily-
 11 increasing integer sequence value (modulo the size of the packet field carrying the sequence_number). The
 12 sequence_number subparameter is encapsulated into the packet by the Sequence encode/decode function
 13 (7.6). A Stream identification function [this time, Active Destination MAC and VLAN Stream identification
 14 (6.6)] modifies the two packets’ destination MAC addresses and VLANs for identification through the
 15 bridged network. Relay system B’s forwarding function then outputs the two packets on two different ports.
 16 The external form of the packets are labeled differently, as indicated by the italic numbers 26 and 31 in
 17 Figure C-4.

18 .

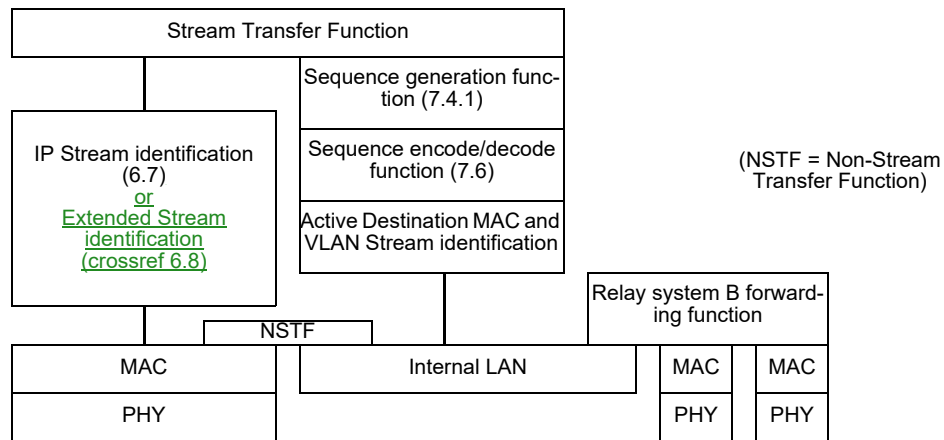


Figure C-5—Protocol stack for relay system B, proxying for End System A, in Figure C-4

19

20 C.5 Example 5: Protocol interworking

21 *Change 1st paragraph of clause C.5 as shown:*

22 Figure C-10 illustrates a simple protocol interworking function in one port of a relay system. In this
 23 example, two different encapsulation schemes 1 and 2 are used for the two legs of the Stream Transfer

1 Function, so that packets are transformed from using one encapsulation to using the other encapsulation as
2 they pass through the port. No additional functions, e.g., a Sequence recovery function (7.4.2) are shown,
3 although they would be perfectly admissible. If this were a port of a bridge attached to an end system,
4 encapsulation **1** could be the Active Destination MAC and VLAN Stream identification (6.6), and
5 encapsulation **2** could be the IP Stream identification (6.7) [or the Extended Stream identification \(crossref](#)
6 [6.8](#)). The net result for the end system could be to convert a specific unicast IP Stream to use a specific
7 multicast destination address and VLAN, in order to direct the packet through a specific path through the
8 bridged network. Presumably, a similar interworking pair at the other end of the Stream would restore the
9 packet to its original destination MAC address and VLAN.

10