

OCF Resource to LWM2M Object Mapping Specification

VERSION 2.2.7 | November 2023



OPEN CONNECTIVITY
FOUNDATION™

CONTACT admin@openconnectivity.org
Copyright Open Connectivity Foundation, Inc. © 2023.
All Rights Reserved.

Legal Disclaimer

NOTHING CONTAINED IN THIS DOCUMENT SHALL BE DEEMED AS GRANTING YOU ANY KIND OF LICENSE IN ITS CONTENT, EITHER EXPRESSLY OR IMPLIEDLY, OR TO ANY INTELLECTUAL PROPERTY OWNED OR CONTROLLED BY ANY OF THE AUTHORS OR DEVELOPERS OF THIS DOCUMENT. THE INFORMATION CONTAINED HEREIN IS PROVIDED ON AN "AS IS" BASIS, AND TO THE MAXIMUM EXTENT PERMITTED BY APPLICABLE LAW, THE AUTHORS AND DEVELOPERS OF THIS SPECIFICATION HEREBY DISCLAIM ALL OTHER WARRANTIES AND CONDITIONS, EITHER EXPRESS OR IMPLIED, STATUTORY OR AT COMMON LAW, INCLUDING, BUT NOT LIMITED TO, IMPLIED WARRANTIES OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE. OPEN CONNECTIVITY FOUNDATION, INC. FURTHER DISCLAIMS ANY AND ALL WARRANTIES OF NON-INFRINGEMENT, ACCURACY OR LACK OF VIRUSES.

The OCF logo is a trademark of Open Connectivity Foundation, Inc. in the United States or other countries. *Other names and brands may be claimed as the property of others.

Copyright © 2022 Open Connectivity Foundation, Inc. All rights reserved.

Copying or other form of reproduction and/or distribution of these works are strictly prohibited.

CONTENTS

Introduction	vii
1 Scope	1
2 Normative references	1
3 Terms, definitions and abbreviated terms	1
3.1 Terms and definitions	1
4 Document conventions and organization	2
4.1 Conventions	2
4.2 Notation.....	2
5 Theory of Operation	3
5.1 Interworking Approach.....	3
5.2 Mapping Syntax.....	3
5.2.1 Introduction	3
5.2.2 General.....	4
5.2.3 Value Assignment	4
5.2.4 Property Naming	4
5.2.5 Arrays	4
5.2.6 Conditional Mapping.....	4
6 LWM2M Translation	4
6.1 Operational Scenarios.....	4
6.2 Enabling LWM2M Application access to OCF Servers	5
6.3 Enabling OCF Client access to LWM2M Devices	6
6.4 On-the-fly Translation.....	6
7 Device Type Mapping.....	6
7.1 Introduction	6
7.2 OCF Device Types for OCF Resources to LWM2M Object mapping.....	6
8 Resource to LWM2M Object Equivalence	7
8.1 Introduction	7
8.2 LWM2M Objects to OCF Resources.....	7
9 Detailed Mapping	8
9.1 Introduction	8
9.2 Actuation	8
9.2.1 Derived model.....	8
9.2.2 Property definition	8
9.2.3 Derived model definition.....	8
9.3 Buzzer.....	9
9.3.1 Derived model.....	9
9.3.2 Property definition.....	9
9.3.3 Derived model definition.....	10

9.4	Device	10
9.4.1	Derived model	10
9.4.2	Property definition	10
9.4.3	Derived model definition	12
9.5	Digital Input	14
9.5.1	Derived model	14
9.5.2	Property definition	14
9.5.3	Derived model definition	14
9.6	Door	15
9.6.1	Derived model	15
9.6.2	Property definition	15
9.6.3	Derived model definition	16
9.7	Energy	16
9.7.1	Derived model	16
9.7.2	Property definition	17
9.7.3	Derived model definition	17
9.8	Humidity	18
9.8.1	Derived model	18
9.8.2	Property definition	18
9.8.3	Derived model definition	18
9.9	Load Control	19
9.9.1	Derived model	19
9.9.2	Property definition	19
9.9.3	Derived model definition	19
9.10	Lock	20
9.10.1	Derived model	20
9.10.2	Property definition	20
9.10.3	Derived model definition	20
9.11	On/Off switch	21
9.11.1	Derived model	21
9.11.2	Property definition	21
9.11.3	Derived model definition	22
9.12	Position	22
9.12.1	Derived model	22
9.12.2	Property definition	22
9.12.3	Derived model definition	23
9.13	Power	24
9.13.1	Derived model	24
9.13.2	Property definition	24
9.13.3	Derived model definition	24
9.14	Temperature	25
9.14.1	Derived model	25
9.14.2	Property definition	25

9.14.3 Derived model definition..... 25

Figures

Figure 1 – OCF-LWM2M Asymmetric Client Bridge.....	4
Figure 2 – OCF-LWM2M Data Model Translation.....	5
Figure 3 – Relationship between LWM2M Application, Object, and Resource	6

Tables

Table 1 – Supported OCF Device Types for OCF Resources to LWM2M Object Mapping	6
Table 2 – LWM2M Object to OCF Resource Type Mapping.....	7
Table 3 – The Property mapping for "lwm2m.o.actuation".....	8
Table 4 – The Properties of "lwm2m.o.actuation".....	8
Table 5 – The Property mapping for "lwm2m.o.buzzer".....	9
Table 6 – The Properties of "lwm2m.o.buzzer".....	10
Table 7 – The Property mapping for "lwm2m.o.device".....	11
Table 8 – The Properties of "lwm2m.o.device".....	11
Table 9 – The Property mapping for "lwm2m.o.digitalinput".....	14
Table 10 – The Properties of "lwm2m.o.digitalinput".....	14
Table 11 – The Property mapping for "lwm2m.o.door".....	15
Table 12 – The Properties of "lwm2m.o.door".....	16
Table 13 – The Property mapping for "lwm2m.o.energy".....	17
Table 14 – The Properties of "lwm2m.o.energy".....	17
Table 15 – The Property mapping for "lwm2m.o.humidity".....	18
Table 16 – The Properties of "lwm2m.o.humidity".....	18
Table 17 – The Property mapping for "lwm2m.o.loadcontrol".....	19
Table 18 – The Properties of "lwm2m.o.loadcontrol".....	19
Table 19 – The Property mapping for "lwm2m.o.lock".....	20
Table 20 – The Properties of "lwm2m.o.lock".....	20
Table 21 – The Property mapping for "lwm2m.o.onoffswitch".....	21
Table 22 – The Properties of "lwm2m.o.onoffswitch".....	21
Table 23 – The Property mapping for "lwm2m.o.position".....	22
Table 24 – The Properties of "lwm2m.o.position".....	23
Table 25 – The Property mapping for "lwm2m.o.power".....	24
Table 26 – The Properties of "lwm2m.o.power".....	24
Table 27 – The Property mapping for "lwm2m.o.temperature".....	25
Table 28 – The Properties of "lwm2m.o.temperature".....	25

Introduction

This document, and all the other parts associated with this document, were developed in response to worldwide demand for smart home focused Internet of Things (IoT) devices, such as appliances, door locks, security cameras, sensors, and actuators; these to be modelled and securely controlled, locally and remotely, over an IP network.

While some inter-device communication existed, no universal language had been developed for the IoT. Device makers instead had to choose between disparate frameworks, limiting their market share, or developing across multiple ecosystems, increasing their costs. The burden then falls on end users to determine whether the products they want are compatible with the ecosystem they bought into, or find ways to integrate their devices into their network, and try to solve interoperability issues on their own.

In addition to the smart home, IoT deployments in commercial environments are hampered by a lack of security. This issue can be avoided by having a secure IoT communication framework, which this standard solves.

The goal of these documents is then to connect the next 25 billion devices for the IoT, providing secure and reliable device discovery and connectivity across multiple OSs and platforms. There are multiple proposals and forums driving different approaches, but no single solution addresses the majority of key requirements. This document and the associated parts enable industry consolidation around a common, secure, interoperable approach.

The OCF specification suite is made up of nineteen discrete documents, the documents fall into logical groupings as described herein:

- Core framework
 - Core Specification
 - Security Specification
 - Onboarding Tool Specification
- Bridging framework and bridges
 - Bridging Specification
 - Resource to Alljoyn Interface Mapping Specification
 - OCF Resource to oneM2M Resource Mapping Specification
 - OCF Resource to BLE Mapping Specification
 - OCF Resource to EnOcean Mapping Specification
 - OCF Resource to LWM2M Mapping Specification
 - OCF Resource to UPlus Mapping Specification
 - OCF Resource to Zigbee Cluster Mapping Specification
 - OCF Resource to Z-Wave Mapping Specification
- Resource and Device models
 - Resource Type Specification
 - Device Specification
- Core framework extensions
 - Easy Setup Specification
 - Core Optional Specification

- OCF Cloud
 - Cloud API for Cloud Services Specification
 - Device to Cloud Services Specification
 - Cloud Security Specification

OCF Resource to LwM2M Object Mapping Specification

1 Scope

This document provides detailed mapping information to provide equivalency between LWM2M defined Objects and OCF defined Resources.

A LWM2M Bridge is Asymmetric Client Bridge, therefore this document provides some OCF Device Types for unidirectional mapping, identifies equivalent OCF Resources for specific LWM2M Objects, and defines the detailed Property by Property mapping using OCF defined extensions to JSON schema to programmatically define the mappings.

2 Normative references

The following documents, in whole or in part, are normatively referenced in this document and are indispensable for its application. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

ISO/IEC 30118-1, Information technology -- Open Connectivity Foundation (OCF) Specification -- Part 1: Core specification

<https://www.iso.org/standard/53238.html>

Latest version available at: https://openconnectivity.org/specs/OCF_Core_Specification.pdf

ISO/IEC 30118-2, Information technology – Open Connectivity Foundation (OCF) Specification – Part 2: Security specification

<https://www.iso.org/standard/74239.html>

Latest version available at: https://openconnectivity.org/specs/OCF_Security_Specification.pdf

ISO/IEC 30118-4, Information technology – Open Connectivity Foundation (OCF) Specification – Part 4: Resource type specification

<https://www.iso.org/standard/74241.html>

Latest version available at:

https://openconnectivity.org/specs/OCF_Resource_Type_Specification.pdf

Derived Models for Interoperability between IoT Ecosystems, Stevens & Merriam, March 2016

https://www.iab.org/wp-content/IAB-uploads/2016/03/OCF-Derived-Models-for-Interoperability-Between-IoT-Ecosystems_v2-examples.pdf

3 Terms, definitions and abbreviated terms

3.1 Terms and definitions

For the purposes of this document, the terms and definitions given in ISO/IEC 30118-1 and ISO/IEC 30118-2 and the following apply.

ISO and IEC maintain terminological databases for use in standardization at the following addresses:

– ISO Online browsing platform: available at <https://www.iso.org/obp>.

– IEC Electropedia: available at <http://www.electropedia.org/>.

38 **3.1.1**

39 **LWM2M Resource**

40 an atomic piece of information that can be read, written, or executed.

41 **3.1.2**

42 **LWM2M Object**

43 a collection of LWM2M Resources. Within LWM2M Object, LWM2M Resources are logically
44 organized.

45 **3.1.3**

46 **LWM2M Application**

47 represents the LWM2M entity (i.e. LWM2M Client of Server), being mapped to a virtual OCF Client,
48 where LWM2M Object instances and LWM2M Resource instances are organized.

49 **4 Document conventions and organization**

50 **4.1 Conventions**

51 In this document a number of terms, conditions, mechanisms, sequences, parameters, events,
52 states, or similar terms are printed with the first letter of each word in uppercase and the rest
53 lowercase (e.g., Network Architecture). Any lowercase uses of these words have the normal
54 technical English meaning.

55 **4.2 Notation**

56 In this document, features are described as required, recommended, allowed or DEPRECATED as
57 follows:

58 Required (or shall or mandatory).

59 These basic features shall be implemented to comply with OIC Core Architecture. The phrases
60 “shall not”, and “PROHIBITED” indicate behavior that is prohibited, i.e. that if performed means
61 the implementation is not in compliance.

62 Recommended (or should).

63 These features add functionality supported by OIC Core Architecture and should be
64 implemented. Recommended features take advantage of the capabilities OIC Core Architecture,
65 usually without imposing major increase of complexity. Notice that for compliance testing, if a
66 recommended feature is implemented, it shall meet the specified requirements to be in
67 compliance with these guidelines. Some recommended features could become requirements in
68 the future. The phrase “should not” indicates behavior that is permitted but not recommended.

69 Allowed (or allowed).

70 These features are neither required nor recommended by OIC Core Architecture, but if the
71 feature is implemented, it shall meet the specified requirements to be in compliance with these
72 guidelines.

73 Conditionally allowed (CA)

74 The definition or behaviour depends on a condition. If the specified condition is met, then the
75 definition or behaviour is allowed, otherwise it is not allowed.

76 Conditionally required (CR)

77 The definition or behaviour depends on a condition. If the specified condition is met, then the
78 definition or behaviour is required. Otherwise the definition or behaviour is allowed as default
79 unless specifically defined as not allowed.

80 DEPRECATED

81 Although these features are still described in this specification, they should not be implemented
82 except for backward compatibility. The occurrence of a deprecated feature during operation of
83 an implementation compliant with the current specification has no effect on the
84 implementation's operation and does not produce any error conditions. Backward compatibility
85 may require that a feature is implemented and functions as specified but it shall never be used
86 by implementations compliant with this specification.

87 Strings that are to be taken literally are enclosed in "double quotes".

88 Words that are emphasized are printed in *italic*.

89 **5 Theory of Operation**

90 **5.1 Interworking Approach**

91 The interworking between LWM2M defined Objects and OCF defined Resource Types is modelled
92 using the derived model syntax described in Derived Models for Interoperability.

93 **5.2 Mapping Syntax**

94 **5.2.1 Introduction**

95 Within the defined syntax for derived modelling used by this document there are two blocks that
96 define the actual Property-Property equivalence or mapping. These blocks are identified by the
97 keywords "x-to-ocf" and "x-from-ocf". Derived Models for Interoperability does not define a rigid
98 syntax for these blocks; they are free form string arrays that contain pseudo-coded mapping logic.

99 Within this document we apply the rules defined in clause 5.2 to these blocks to ensure consistency
100 and re-usability and extensibility of the mapping logic that is defined.

101 In this document, Python (version >= 3.0) syntax is used to describe translation rules.

102 The JSON skeleton shows typical translation block used in the derived models.

```
103 "<LWM2M Object Name(ID)>" : {  
104     "type": "object",  
105     "properties": {  
106         "<LWM2M Resource Name(ID)>" : {  
107             "x-ocf-conversion" : {  
108                 "x-ocf-alias": "<corresponding OCF Resource type>",  
109                 "x-to-ocf": [  
110                     ...  
111                     ...  
112                 ],  
113                 "x-from-ocf": [  
114                     ...  
115                     ...  
116                 ]  
117             }  
118         }  
119     }  
120 }  
121 }
```

122 – <LWM2M Object Name>: this is the LWM2M Object with prefix string,"lwm2m.o"(e.g.
123 "lwm2m.0.buzzer")

124 – <LWM2M Resource Name(ID) >: this is the LWM2M Resource name with LWM2M Resource ID
125 in parentheses.(e.g. "on/off(5850)")

126 – <corresponding OCF Resource type>: an OCF Resource type which is corresponding to this
127 LWM2M Object.

128

129 **5.2.2 General**

130 All statements are terminated with a carriage return.

131 **5.2.3 Value Assignment**

132 The equals sign (=) is used to assign one value to another. The assignee is on the left of the
133 operator; the value being assigned on the right.

134 **5.2.4 Property Naming**

135 All Property names are identical to the name used by the original model; for example, from the
136 OCF Temperature Resource the Property name "temperature" is used whereas when referred to
137 the derived ecosystem then the semantically equivalent Property name is used.

138 **5.2.5 Arrays**

139 An array element is indicated by the use of square brackets "[]" with the index of the element
140 contained therein, e.g. range[1]. All arrays start at an index of 0. If an entire array is being
141 referenced, then no index is included.

142 **5.2.6 Conditional Mapping**

143 When a mapping is dependent on the meeting of other conditions then the syntax:

144 if "condition", "mapping".

145 is applied.


146

147 **6 LWM2M Translation**

148 **6.1 Operational Scenarios**

149 The purpose of the LWM2M Bridge Platform is to enable access by the LWM2M ecosystem to
150 select OCF Servers. Figure 2 shows an overview of the LWM2M Bridge Platform and its general
151 topology. The LWM2M Bridging Function supports Asymmetric bridging. This is accomplished by
152 creating Virtual OCF Clients to represent the necessary access levels to the OCF servers that are
153 exposed to the LWM2M ecosystem. The LWM2M Bridge Platform then exposes native LWM2M
154 entities(i.e. LWM2M devices) that map to those Virtual OCF Clients.

155 The LWM2M bridging is an Asymmetric Client Bridging.

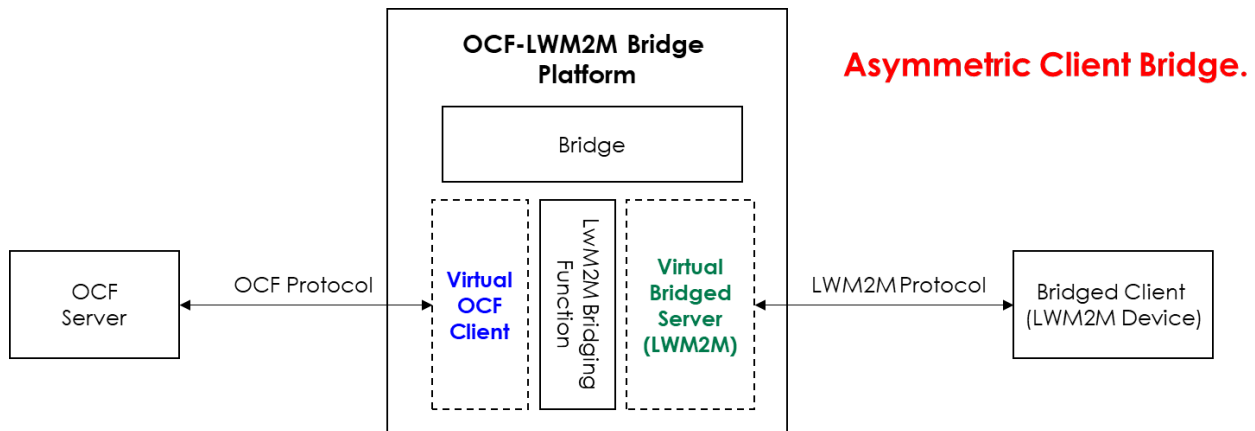


156

157 **Figure 1 – OCF-LWM2M Asymmetric Client Bridge**

158

159 Figure 3 shows OCF-LWM2M Data Model Translation. When LWM2M device boots up, firstly it tries
160 to register its resources (e.g., LWM2M Objects, and LWM2M Resource) to a LWM2M Server.
161 Although the LWM2M Server doesn't discover devices, it is able to access to the LWM2M Client
162 through the registered resources. LWM2M basically does not define the device type. As shown in
163 Figure 3, while OCF Resource corresponds to LWM2M Object and OCF property corresponds to
164 LWM2M Resource, there is no LWM2m data model corresponding to OCF device.

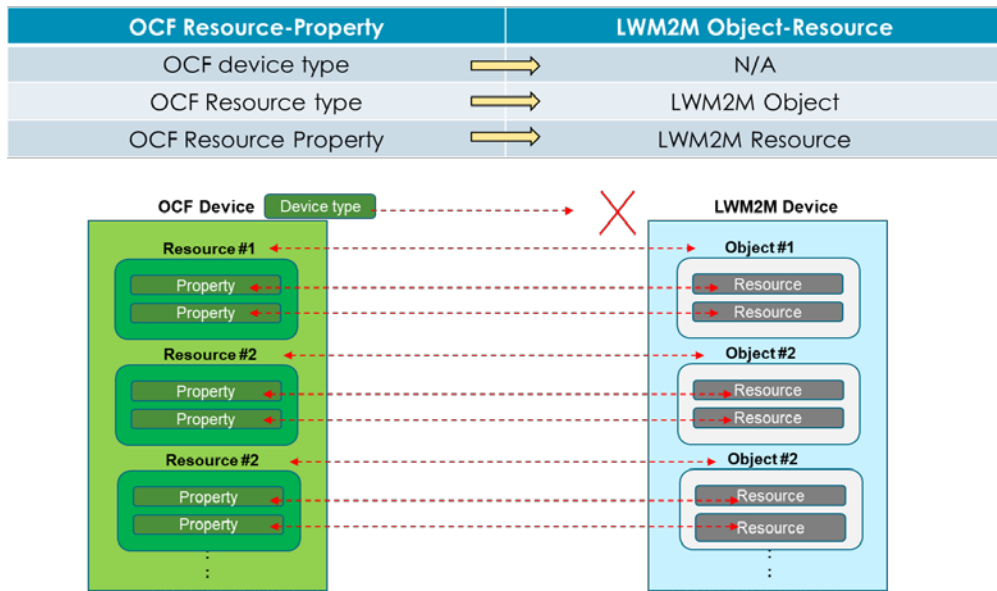

165


166

Figure 2 – OCF-LWM2M Data Model Translation

167 The mapping between the OCF data models and the LWM2M data models is specified in
168 Programmatic (i.e. On-the-fly) data model translation is not supported.

169 6.2 Enabling LWM2M Application access to OCF Servers

170 Each level of LWM2M Application access for OCF servers is modelled as a Virtual OCF Client. In
171 this way, LWM2M Application access can be appropriately restricted and enforced by the OCF
172 security capabilities. Figure 3 provides more details on the relationship between an LWM2M
173 Application, objects and resources.

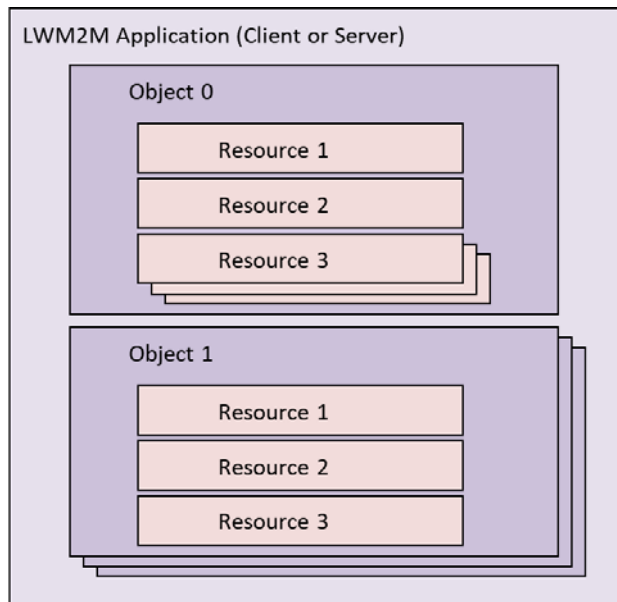

174

175 **Figure 3 – Relationship between LWM2M Application, Object, and Resource**

176 **6.3 Enabling OCF Client access to LWM2M Devices**

177 This capability is not supported.

178 **6.4 On-the-fly Translation**

179 All devices and resources have been aligned between the OCF and LWM2M ecosystems, so on
180 the-fly translation is not required.

181 If new OCF devices are not reflected into the LWM2M ecosystem by updates to the LWM2M
182 specifications, the Bridge Platform will not provide a successful translation of those devices.

183 **7 Device Type Mapping**

184 **7.1 Introduction**

185 This clause contains the OCF Device Types for OCF Resource to LWM2M Object mapping.

186 **7.2 OCF Device Types for OCF Resources to LWM2M Object mapping**

187 In LWM2M Specification, there is no definition for Device type but the definition for LWM2M object,
188 which is similar to OCF Resource type. Table 1 captures the list of the supported OCF Device
189 Types for OCF Resource to LWM2M Object mapping.

190 **Table 1 – Supported OCF Device Types for OCF Resources to LWM2M Object Mapping**

LWM2M Object name	OCF Resource Type	OCF Device Type
On/Off switch	oic.r.switch.binary	oic.d.airconditioner
Temperature	oic.r.temperature	
On/Off switch	oic.r.switch.binary	oic.d.airpurifier
On/Off switch	oic.r.switch.binary	oic.d.washerdryer
On/Off switch	oic.r.switch.binary	oic.d.dehumidifier
Power	oic.r.energy.consumption	oic.d.electrictmeter

Power	oic.r.energy.consumption	oic.d.energymonitor
On/Off switch	oic.r.switch.binary	oic.d.fan
Temperature	oic.r.temperature	oic.d.refrigerator
On/Off switch	oic.r.switch.binary	oic.d.humidifier
On/Off switch	oic.r.switch.binary	oic.d.light
On/Off switch	oic.r.switch.binary	oic.d.oven
Temperature	oic.r.temperature	
On/Off switch	oic.r.switch.binary	oic.d.stb
Lock	oic.r.lock.status	oic.d.smartlock
On/Off switch	oic.r.switch.binary	oic.d.smartplug
Temperature	oic.r.temperature	oic.d.thermostat
On/Off switch	oic.r.switch.binary	oic.d.waterheater
Temperature	oic.r.temperature	

191 **8 Resource to LWM2M Object Equivalence**

192 **8.1 Introduction**

193 This clause lists the complete set of applicable LWM2M Objects and provides the equivalent OCF
 194 Resource Type(s) to which the Objects map.

195 **8.2 LWM2M Objects to OCF Resources**

196 Table 2 captures the equivalency mapping between LWM2M defined Objects and OCF defined
 197 Resource Types (see ISO/IEC 30118-4). Detailed Property by Property mappings are provided in
 198 clause 9.

199 **Table 2 – LWM2M Object to OCF Resource Type Mapping**

LWM2M Object Name	LWM2M Object ID	OCF Resource Type
Actuation	3306	oic.r.audio
Buzzer	3338	oic.r.door
Device	3	oic.wk.d
		oic.wk.p
		oic.r.energy.battery
Digital Input	3300	oic.r.vehicleconnector
Door	10351	oic.r.door
Energy	3331	oic.r.energy.consumption
Humidity	3304	oic.r.humidity
Load Control	3310	oic.r.time.period
Lock	10359	oic.r.lock.status
On/Off switch	3342	oic.r.switch.binary
Positioner	3337	oic.r.openlevel
Power	3328	oic.r.energy.consumption

Temperature	3303	oic.r.temperature
-------------	------	-------------------

200 9 Detailed Mapping

201 9.1 Introduction

202 This clause provides an API and mapping description that aligns with the Derived Modelling syntax
203 described in Derived Models for Interoperability for all Objects and Resources that are within scope.

204 The derived model definitions presented in clause 9 are formatted for readability, and so may
205 appear to have extra line breaks.

206 9.2 Actuation

207 9.2.1 Derived model

208 The derived model: "lwm2m.o.actuation".

209 9.2.2 Property definition

210 Table 3 provides the detailed per Property mapping for "lwm2m.o.actuation".

211 **Table 3 – The Property mapping for "lwm2m.o.actuation".**

LWM2M Resource name	OCF Resource	To OCF	From OCF
On/Off(5850)	oic.r.audio	oic.r.audio.mute = On/Off(5850)	On/Off(5850) = oic.r.audio.mute
Dimmer(5851)	oic.r.audio	oic.r.audio.volume = Dimmer(5851)	Dimmer(5851) = oic.r.audio.volume
Application Type(5750)	oic.r.audio	oic.r.audio.n = Application Type(5750)	Application Type(5750) = oic.r.audio.n

212 Table 4 provides the details of the Properties that are part of "lwm2m.o.actuation".

213 **Table 4 – The Properties of "lwm2m.o.actuation".**

LWM2M Resource name	Type	Required	Description
On/Off(5850)	boolean	yes	On/off control. Boolean value where True is On and False is Off.
Dimmer(5851)	integer	no	This resource represents a dimmer setting, which has an Integer value between 0 and 100 as a percentage.
Application Type(5750)	string	no	The application type of the sensor or actuator as a string depending on the use case.

214 9.2.3 Derived model definition

```
215 {
216   "id": "http://openinterconnect.org/asamapping/schemas/asa.environment.currentairquality.json#",
217   "$schema": "http://json-schema.org/draft-04/schema#",
218   "description": "Copyright (c) 2017 Open Connectivity Foundation, Inc. All rights reserved.",
219   "title": "Actuation",
220   "definitions": {
221     "lwm2m.o.actuation": {
222       "type": "object",
223       "properties": {
224         "On/Off(5850)": {
225           "type": "boolean",
```

```

226         "description": "On/off control. Boolean value where True is On and False is Off.",
227         "x-ocf-conversion": {
228             "x-ocf-alias": "oic.r.audio",
229             "x-to-ocf": [
230                 "oic.r.audio.mute = On/Off(5850)"
231             ],
232             "x-from-ocf": [
233                 "On/Off(5850) = oic.r.audio.mute"
234             ]
235         },
236     },
237     "Dimmer(5851)": {
238         "type": "integer",
239         "description": "This resource represents a dimmer setting, which has an Integer value
240 between 0 and 100 as a percentage.",
241         "x-ocf-conversion": {
242             "x-ocf-alias": "oic.r.audio",
243             "x-to-ocf": [
244                 "oic.r.audio.volume = Dimmer(5851)"
245             ],
246             "x-from-ocf": [
247                 "Dimmer(5851) = oic.r.audio.volume"
248             ]
249         },
250     },
251     "Application Type(5750)": {
252         "type": "string",
253         "description": "The application type of the sensor or actuator as a string depending on
254 the use case.",
255         "x-ocf-conversion": {
256             "x-ocf-alias": "oic.r.audio",
257             "x-to-ocf": [
258                 "oic.r.audio.n = Application Type(5750)"
259             ],
260             "x-from-ocf": [
261                 "Application Type(5750) = oic.r.audio.n"
262             ]
263         },
264     },
265 },
266 }
267
268 },
269 "type": "object",
270 "allof": [
271     {"$ref": "#/definitions/lwm2m.o.actuation"}
272 ],
273 "required": ["On/Off(5850)"]
274 }
275

```

276 9.3 Buzzer

277 9.3.1 Derived model

278 The derived model: "lwm2m.o.buzzer".

279 9.3.2 Property definition

280 Table 5 provides the detailed per Property mapping for "lwm2m.o.buzzer".

281 **Table 5 – The Property mapping for "lwm2m.o.buzzer".**

LWM2M Resource name	OCF Resource	To OCF	From OCF
On/Off(5850)	oic.r.door	oic.r.door.openAlarm = On/Off(5850)	On/Off(5850) = oic.r.door.openAlarm
Application Type(5750)	oic.r.door		Application Type(5750) = "Door Open Alarm"

282 Table 6 provides the details of the Properties that are part of "lwm2m.o.buzzer".

Table 6 – The Properties of "lwm2m.o.buzzer".

LWM2M Resource name	Type	Required	Description
On/Off(5850)	boolean	yes	On/off control. Boolean value where True is On and False is Off.
Application Type(5750)	string	no	The application type of the sensor or actuator as a string depending on the use case.

284 9.3.3 Derived model definition

```

285 {
286   "id": "http://openinterconnect.org/asamapping/schemas/asa.environment.currentairquality.json#",
287   "$schema": "http://json-schema.org/draft-04/schema#",
288   "description": "Copyright (c) 2017 Open Connectivity Foundation, Inc. All rights reserved.",
289   "title": "Buzzer",
290   "definitions": {
291     "lwm2m.o.buzzer": {
292       "type": "object",
293       "properties": {
294         "On/Off(5850)": {
295           "type": "boolean",
296           "description": "On/off control. Boolean value where True is On and False is Off.",
297           "x-ocf-conversion": {
298             "x-ocf-alias": "oic.r.door",
299             "x-to-ocf": [
300               "oic.r.door.openAlarm = On/Off(5850)"
301             ],
302             "x-from-ocf": [
303               "On/Off(5850) = oic.r.door.openAlarm"
304             ]
305           }
306         },
307         "Application Type(5750)": {
308           "type": "string",
309           "description": "The application type of the sensor or actuator as a string depending on
310 the use case.",
311           "x-ocf-conversion": {
312             "x-ocf-alias": "oic.r.door",
313             "x-to-ocf": [""],
314             "x-from-ocf": [
315               "Application Type(5750) = \"Door Open Alarm\""
316             ]
317           }
318         }
319       }
320     }
321   },
322   "type": "object",
323   "allOf": [
324     {"$ref": "#/definitions/lwm2m.o.buzzer"}
325   ],
326   "required": ["On/Off(5850)"]
327 }
328
329

```

330 9.4 Device

331 9.4.1 Derived model

332 The derived model: "lwm2m.o.device".

333 9.4.2 Property definition

334 Table 7 provides the detailed per Property mapping for "lwm2m.o.device".

Table 7 – The Property mapping for "lwm2m.o.device".

LWM2M Resource name	OCF Resource	To OCF	From OCF
Battery Level (9)	oic.r.energy.battery	oic.r.energy.battery.charge = Battery Level(9)	Battery Level(9) = oic.r.energy.battery.charge
Device Type (17)	oic.wk.d	oic.wk.d.n = Device Type (17)	Device Type (17) = oic.wk.d.n
Battery Status (20)	oic.r.energy.battery	<pre> switch (Battery Status (20)) { Case 0 : oic.r.energy.battery.charging = FALSE; oic.r.energy.battery.defect = FALSE; oic.r.energy.battery.lowbattery = FALSE; break; Case 1 : oic.r.energy.battery.charging = TRUE; oic.r.energy.battery.defect = FALSE; oic.r.energy.battery.lowbattery = FALSE; break; Case 2 : oic.r.energy.battery.charging = FALSE; oic.r.energy.battery.defect = FALSE; oic.r.energy.battery.lowbattery = FALSE; break; Case 3 : oic.r.energy.battery.charging = FALSE; oic.r.energy.battery.defect = TRUE; oic.r.energy.battery.lowbattery = FALSE; break; Case 4 : oic.r.energy.battery.charging = FALSE; oic.r.energy.battery.defect = FALSE; oic.r.energy.battery.lowbattery = TRUE; break; </pre>	<pre> If (oic.r.energy.battery.charing == TRUE) {Battery Status (20) = 1;} else { if (oic.r.energy.battery.defect == TRUE) {Battery Status (20) = 3;} if (oic.r.energy.battery.lowbattery == TRUE) {Battery Status (20) = 4;} if(oic.r.energy.battery.charge == 100) {Battery Status (20) = 2;} else {Battery Status (20) = 0;} } </pre>
Manufacturer (0)	oic.wk.p	oic.wk.p.mnmn = Manufacturer (0)	Manufacturer (0) = oic.wk.p.mnmn
Model Number (1)	oic.wk.p	oic.wk.p.mnmo = Model Number (1)	Model Number (1) = oic.wk.p.mnmo
Serial Number (2)	oic.wk.p	oic.wk.p.mnsel = Serial Number (2)	Serial Number (2) = oic.wk.p.mnsel
Firmware Version (3)	oic.wk.p	oic.wk.p.mnfv = Firmware Version (3)	Firmware Version (3) = oic.wk.p.mnfv
Hardware Version (18)	oic.wk.p	oic.wk.p.mnhw = Hardware Version (18)	Hardware Version (18) = oic.wk.p.mnhw

336 Table 8 provides the details of the Properties that are part of "lwm2m.o.device".

Table 8 – The Properties of "lwm2m.o.device".

LWM2M Resource name	Type	Required	Description
Battery Level (9)	integer	no	Contains the current battery level as a percentage (with a range from 0 to 100). This value

			is only valid for the Device internal Battery if present (one Available Power Sources Resource Instance is 1).
Device Type (17)	string	no	Type of the device (manufacturer specified string: e.g. smart meters / dev Class...)
Battery Status (20)	integer	no	This value is only valid for the Device Internal Battery if present
Manufacturer (0)	string	no	Human readable manufacturer name
Model Number (1)	string	no	A model identifier (manufacturer specified string)
Serial Number (2)	string	no	Serial Number
Firmware Version (3)	string	no	Current firmware version of the Device.
Hardware Version (18)	string	no	Current hardware version of the device.

338 9.4.3 Derived model definition

```

339 {
340   "id": "http://openinterconnect.org/asamapping/schemas/asa.environment.currentairquality.json#",
341   "$schema": "http://json-schema.org/draft-04/schema#",
342   "description": "Copyright (c) 2017 Open Connectivity Foundation, Inc. All rights reserved.",
343   "title": "Device",
344   "definitions": {
345     "lwm2m.o.device": {
346       "type": "object",
347       "properties": {
348         "Battery Level (9)": {
349           "type": "integer",
350           "description": "Contains the current battery level as a percentage (with a range from 0 to
351 100). This value is only valid for the Device internal Battery if present (one Available Power
352 Sources Resource Instance is 1).",
353           "x-ocf-conversion": {
354             "x-ocf-alias": "oic.r.energy.battery",
355             "x-to-ocf": [
356               "oic.r.energy.battery.charge = Battery Level(9)"
357             ],
358             "x-from-ocf": [
359               "Battery Level(9) = oic.r.energy.battery.charge"
360             ]
361           }
362         },
363         "Device Type (17)": {
364           "type": "string",
365           "description": "Type of the device (manufacturer specified string: e.g. smart meters / dev
366 Class...)",
367           "x-ocf-conversion": {
368             "x-ocf-alias": "oic.wk.d",
369             "x-to-ocf": [
370               "oic.wk.d.n = Device Type (17)"
371             ],
372             "x-from-ocf": [
373               "Device Type (17) = oic.wk.d.n"
374             ]
375           }
376         },
377         "Battery Status (20)": {
378           "type": "integer",
379           "description": "This value is only valid for the Device Internal Battery if present",
380           "x-ocf-conversion": {

```

```

381         "x-ocf-alias": "oic.r.energy.battery",
382         "x-to-ocf": [
383             "switch (Battery Status (20)) {",
384                 "Case 0 : oic.r.energy.battery.charging = FALSE; oic.r.energy.battery.defect =
385 FALSE; oic.r.energy.battery.lowbattery = FALSE; break;",
386                 "Case 1 : oic.r.energy.battery.charging = TRUE; oic.r.energy.battery.defect = FALSE;
387 oic.r.energy.battery.lowbattery = FALSE; break;",
388                 "Case 2 : oic.r.energy.battery.charging = FALSE; oic.r.energy.battery.defect = FALSE;
389 oic.r.energy.battery.lowbattery = FALSE; break;",
390                 "Case 3 : oic.r.energy.battery.charging = FALSE; oic.r.energy.battery.defect = TRUE;
391 oic.r.energy.battery.lowbattery = FALSE; break;",
392                 "Case 4 : oic.r.energy.battery.charging = FALSE; oic.r.energy.battery.defect = FALSE;
393 oic.r.energy.battery.lowbattery = TRUE; break;"
394             ],
395         "x-from-ocf": [
396             "If (oic.r.energy.battery.charing == TRUE) {Battery Status (20) = 1;} ",
397             "else { if (oic.r.energy.battery.defect == TRUE) {Battery Status (20) = 3;} ",
398             "if (oic.r.energy.battery.lowbattery == TRUE) {Battery Status (20) = 4;} ",
399             "if(oic.r.energy.battery.charge == 100) {Battery Status (20)",
400             "= 2;} ",
401             "else {Battery Status (20) = 0;} }"
402         ]
403     },
404 },
405 "Manufacturer (0)": {
406     "type": "string",
407     "description": "Human readable manufacturer name",
408     "x-ocf-conversion": {
409         "x-ocf-alias": "oic.wk.p",
410         "x-to-ocf": [
411             "oic.wk.p.mnmn = Manufacturer (0)"
412         ],
413         "x-from-ocf": [
414             "Manufacturer (0) = oic.wk.p.mnmn"
415         ]
416     }
417 },
418 "Model Number (1)": {
419     "type": "string",
420     "description": "A model identifier (manufacturer specified string)",
421     "x-ocf-conversion": {
422         "x-ocf-alias": "oic.wk.p",
423         "x-to-ocf": [
424             "oic.wk.p.mnmo = Model Number (1)"
425         ],
426         "x-from-ocf": [
427             "Model Number (1) = oic.wk.p.mnmo"
428         ]
429     }
430 },
431 "Serial Number (2)": {
432     "type": "string",
433     "description": "Serial Number",
434     "x-ocf-conversion": {
435         "x-ocf-alias": "oic.wk.p",
436         "x-to-ocf": [
437             "oic.wk.p.mnsel = Serial Number (2)"
438         ],
439         "x-from-ocf": [
440             "Serial Number (2) = oic.wk.p.mnsel"
441         ]
442     }
443 },
444 "Firmware Version (3)": {
445     "type": "string",
446     "description": "Current firmware version of the Device.",
447     "x-ocf-conversion": {
448         "x-ocf-alias": "oic.wk.p",
449         "x-to-ocf": [
450             "oic.wk.p.mnfv = Firmware Version (3)"
451         ],
452         "x-from-ocf": [

```

```

453         "Firmware Version (3) = oic.wk.p.mnfv"
454     ]
455 }
456 },
457 "Hardware Version (18)": {
458     "type": "string",
459     "description": "Current hardware version of the device.",
460     "x-ocf-conversion": {
461         "x-ocf-alias": "oic.wk.p",
462         "x-to-ocf": [
463             "oic.wk.p.mnhw = Hardware Version (18)"
464         ],
465         "x-from-ocf": [
466             "Hardware Version (18) = oic.wk.p.mnhw"
467         ]
468     }
469 }
470 }
471 }
472 },
473 "type": "object",
474 "allOf": [
475     {"$ref": "#/definitions/lwm2m.o.device"}
476 ],
477 "required": []
478 }
479

```

480 9.5 Digital Input

481 9.5.1 Derived model

482 The derived model: "lwm2m.o.digitalinput".

483 9.5.2 Property definition

484 Table 9 provides the detailed per Property mapping for "lwm2m.o.digitalinput".

485 **Table 9 – The Property mapping for "lwm2m.o.digitalinput".**

LWM2M Resource name	OCF Resource	To OCF	From OCF
Digital Input state (5500)	oic.r.vehicle.connector	oic.r.vehicle.connector.connected = Digital Input state (5500)	Digital Input state (5500) = oic.r.vehicle.connector.connected
Sensor Type (5751)	oic.r.vehicle.connector		Sensor Type (5751) = "Vehicle Connector"
Application Type (5750)	oic.r.vehicle.connector		Application Type (5750) = "Vehicle Connector"

486 Table 10 provides the details of the Properties that are part of "lwm2m.o.digitalinput".

487 **Table 10 – The Properties of "lwm2m.o.digitalinput".**

LWM2M Resource name	Type	Required	Description
Digital Input state (5500)	boolean	yes	The current state of a digital input.
Sensor Type (5751)	string	no	The type of the sensor
Application Type (5750)	string	no	The minimum value that can be measured by the sensor.

488 9.5.3 Derived model definition

```

489 {
490     "id": "http://openinterconnect.org/asamapping/schemas/asa.environment.currentairquality.json#",
491     "$schema": "http://json-schema.org/draft-04/schema#",

```

```

492 "description" : "Copyright (c) 2017 Open Connectivity Foundation, Inc. All rights reserved.",
493 "title": "Digital Input",
494 "definitions": {
495   "lwm2m.o.digitalinput": {
496     "type": "object",
497     "properties": {
498       "Digital Input state (5500)": {
499         "type": "boolean",
500         "description": "The current state of a digital input.",
501         "x-ocf-conversion": {
502           "x-ocf-alias": "oic.r.vehicle.connector",
503           "x-to-ocf": [
504             "oic.r.vehicle.connector.connected = Digital Input state (5500)"
505           ],
506           "x-from-ocf": [
507             "Digital Input state (5500) = oic.r.vehicle.connector.connected"
508           ]
509         }
510       },
511       "Sensor Type (5751)": {
512         "type": "string",
513         "description": "The type of the sensor",
514         "x-ocf-conversion": {
515           "x-ocf-alias": "oic.r.vehicle.connector",
516           "x-to-ocf": [
517             ""
518           ],
519           "x-from-ocf": [
520             "Sensor Type (5751) = \"Vehicle Connector\""
521           ]
522         }
523       },
524       "Application Type (5750)": {
525         "type": "string",
526         "description": "The minimum value that can be measured by the sensor.",
527         "x-ocf-conversion": {
528           "x-ocf-alias": "oic.r.vehicle.connector",
529           "x-to-ocf": [
530             ""
531           ],
532           "x-from-ocf": [
533             "Application Type (5750) = \"Vehicle Connector\""
534           ]
535         }
536       }
537     }
538   },
539   "type": "object",
540   "allOf": [
541     {"$ref": "#/definitions/lwm2m.o.digitalinput"}
542   ],
543   "required": ["Digital Input state (5500)"]
544 }
545 }
546

```

547 9.6 Door

548 9.6.1 Derived model

549 The derived model: "lwm2m.o.door".

550 9.6.2 Property definition

551 Table 11 provides the detailed per Property mapping for "lwm2m.o.door".

552 **Table 11 – The Property mapping for "lwm2m.o.door".**

LWM2M Resource name	OCF Resource	To OCF	From OCF
Door status(50)	oic.r.door	If (Door status(50) == 1) {oic.r.door.openState =	if(oic.r.door.openState == "open") {Door status(50) =

		"open";} else {oic.r.door.openState = "closed";}	1; } else { Door statue(50) = 0;}
Door Name(1)	oic.r.door	oic.r.door.n = Door Name(1)	Door Name(1) = oic.r.door.n

553 Table 12 provides the details of the Properties that are part of "lwm2m.o.door".

554 **Table 12 – The Properties of "lwm2m.o.door".**

LWM2M Resource name	Type	Required	Description
Door status(50)	boolean	yes	The status of the door, 1:Opened, 0:Closed.
Door Name(1)	float	yes	The name of the door.

555 9.6.3 Derived model definition

```

556 {
557   "id": "http://openinterconnect.org/asamapping/schemas/asa.environment.currentairquality.json#",
558   "$schema": "http://json-schema.org/draft-04/schema#",
559   "description": "Copyright (c) 2017 Open Connectivity Foundation, Inc. All rights reserved.",
560   "title": "Door",
561   "definitions": {
562     "lwm2m.o.door": {
563       "type": "object",
564       "properties": {
565         "Door status(50)": {
566           "type": "boolean",
567           "description": "The status of the door, 1:Opened, 0:Closed.",
568           "x-ocf-conversion": {
569             "x-ocf-alias": "oic.r.door",
570             "x-to-ocf": [
571               "If (Door status(50) == 1) {oic.r.door.openState = \"open\";} else {oic.r.door.openState
572 = \"closed\";}"]
573             ],
574             "x-from-ocf": [
575               "if(oic.r.door.openState == \"open\") {Door status(50) = 1; } else { Door statue(50) =
576 0;}"]
577             ]
578           }
579         },
580         "Door Name(1)": {
581           "type": "float",
582           "description": "The name of the door.",
583           "x-ocf-conversion": {
584             "x-ocf-alias": "oic.r.door",
585             "x-to-ocf": [
586               "oic.r.door.n = Door Name(1)"
587             ],
588             "x-from-ocf": [
589               "Door Name(1) = oic.r.door.n"
590             ]
591           }
592         }
593       }
594     }
595   },
596   "type": "object",
597   "allOf": [
598     {"$ref": "#/definitions/lwm2m.o.door"}
599   ],
600   "required": ["Door status(50)", "Door Name(1)"]
601 }
602

```

603 9.7 Energy

604 9.7.1 Derived model

605 The derived model: "lwm2m.o.energy".

606 **9.7.2 Property definition**

607 Table 13 provides the detailed per Property mapping for "lwm2m.o.energy".

608 **Table 13 – The Property mapping for "lwm2m.o.energy".**

LWM2M Resource name	OCF Resource	To OCF	From OCF
Sensor Value (5700)	oic.r.energy.consumption	oic.r.energy.consumption.energy = Sensor Value(5700)	Sensor Value(5700) = oic.r.energy.consumption.energy
Application Type (5750)	oic.r.energy.consumption		Application Type (5750) = "Energy consumption"

609 Table 14 provides the details of the Properties that are part of "lwm2m.o.energy".

610 **Table 14 – The Properties of "lwm2m.o.energy".**

LWM2M Resource name	Type	Required	Description
Sensor Value (5700)	float	yes	Last or Current Measured Value from the Sensor. (energy consumption (Cumulative Power) of an electrical load)
Application Type (5750)	float	no	The application type of the sensor or actuator as a string depending on the use case.

611 **9.7.3 Derived model definition**

```

612 {
613   "id": "http://openinterconnect.org/asamapping/schemas/asa.environment.currentairquality.json#",
614   "$schema": "http://json-schema.org/draft-04/schema#",
615   "description": "Copyright (c) 2017 Open Connectivity Foundation, Inc. All rights reserved.",
616   "title": "Energy",
617   "definitions": {
618     "lwm2m.o.energy": {
619       "type": "object",
620       "properties": {
621         "Sensor Value (5700)": {
622           "type": "float",
623           "description": "Last or Current Measured Value from the Sensor. (energy consumption
624 (Cumulative Power) of an electrical load)",
625           "x-ocf-conversion": {
626             "x-ocf-alias": "oic.r.energy.consumption",
627             "x-to-ocf": [
628               "oic.r.energy.consumption.energy = Sensor Value(5700)"
629             ],
630             "x-from-ocf": [
631               "Sensor Value(5700) = oic.r.energy.consumption.energy"
632             ]
633           }
634         },
635         "Application Type (5750)": {
636           "type": "float",
637           "description": "The application type of the sensor or actuator as a string depending on
638 the use case.",
639           "x-ocf-conversion": {
640             "x-ocf-alias": "oic.r.energy.consumption",
641             "x-to-ocf": [""],
642             "x-from-ocf": [
643               "Application Type (5750) = \"Energy consumption\""
644             ]
645           }
646         }
647       }
648     }
  }

```

```

649     },
650     "type": "object",
651     "allOf": [
652       { "$ref": "#/definitions/lwm2m.o.energy" }
653     ],
654     "required": ["Sensor Value (5700)"]
655   }
656 }
657

```

658 9.8 Humidity

659 9.8.1 Derived model

660 The derived model: "lwm2m.o.humidity".

661 9.8.2 Property definition

662 Table 15 provides the detailed per Property mapping for "lwm2m.o.humidity".

663 **Table 15 – The Property mapping for "lwm2m.o.humidity".**

LWM2M Resource name	OCF Resource	To OCF	From OCF
Sensor Value (5700)	oic.r.humidity	oic.r.humidity.humidity = Sensor Value(5700)	Sensor Value(5700) = oic.r.humidity.humidity

664 Table 16 provides the details of the Properties that are part of "lwm2m.o.humidity".

665 **Table 16 – The Properties of "lwm2m.o.humidity".**

LWM2M Resource name	Type	Required	Description
Sensor Value (5700)	float	yes	Last or Current Measured Value from the Sensor.

666 9.8.3 Derived model definition

```

667 {
668   "id": "http://openinterconnect.org/asamapping/schemas/asa.environment.currentairquality.json#",
669   "$schema": "http://json-schema.org/draft-04/schema#",
670   "description": "Copyright (c) 2017 Open Connectivity Foundation, Inc. All rights reserved.",
671   "title": "Humidity",
672   "definitions": {
673     "lwm2m.o.humidity": {
674       "type": "object",
675       "properties": {
676         "Sensor Value (5700)": {
677           "type": "float",
678           "description": "Last or Current Measured Value from the Sensor.",
679           "x-ocf-conversion": {
680             "x-ocf-alias": "oic.r.humidity",
681             "x-to-ocf": [
682               "oic.r.humidity.humidity = Sensor Value(5700)"
683             ],
684             "x-from-ocf": [
685               "Sensor Value(5700) = oic.r.humidity.humidity"
686             ]
687           }
688         }
689       }
690     }
691   },
692   "type": "object",
693   "allOf": [
694     { "$ref": "#/definitions/lwm2m.o.humidity" }
695   ],
696   "required": ["Sensor Value (5700)"]
697 }
698 }
699

```

700 9.9 Load Control

701 9.9.1 Derived model

702 The derived model: "lwm2m.o.loadcontrol".

703 9.9.2 Property definition

704 Table 17 provides the detailed per Property mapping for "lwm2m.o.loadcontrol".

705 **Table 17 – The Property mapping for "lwm2m.o.loadcontrol".**

LWM2M Resource name	OCF Resource	To OCF	From OCF
Start Time(5824)	oic.r.time.period	oic.r.time.period.startTime = Start Time(5824)	Start Time(5824) = oic.r.time.period.startTime
Duration in Min(5825)	oic.r.time.period	oic.r.time.period.interval = Duration in Min(5825)	Duration in Min(5825) = oic.r.time.period.interval
Event Identifier(5823)	oic.r.time.period	oic.r.time.period.id = Event Identifier(5823)	Event Identifier(5823) = oic.r.time.period.id

706 Table 18 provides the details of the Properties that are part of "lwm2m.o.loadcontrol".

707 **Table 18 – The Properties of "lwm2m.o.loadcontrol".**

LWM2M Resource name	Type	Required	Description
Start Time(5824)	time	yes	Start time
Duration in Min(5825)	integer	yes	Duration
Event Identifier(5823)	string	yes	Identifier

708 9.9.3 Derived model definition

```
709 {
710   "id": "http://openinterconnect.org/asamapping/schemas/asa.environment.currentairquality.json#",
711   "$schema": "http://json-schema.org/draft-04/schema#",
712   "description": "Copyright (c) 2017 Open Connectivity Foundation, Inc. All rights reserved.",
713   "title": "Load Control",
714   "definitions": {
715     "lwm2m.o.loadcontrol": {
716       "type": "object",
717       "properties": {
718         "Start Time(5824)": {
719           "type": "time",
720           "description": "Start time",
721           "x-ocf-conversion": {
722             "x-ocf-alias": "oic.r.time.period",
723             "x-to-ocf": [
724               "oic.r.time.period.startTime = Start Time(5824)"
725             ],
726             "x-from-ocf": [
727               "Start Time(5824) = oic.r.time.period.startTime"
728             ]
729           }
730         },
731         "Duration in Min(5825)": {
732           "type": "integer",
733           "description": "Duration",
734           "x-ocf-conversion": {
735             "x-ocf-alias": "oic.r.time.period",
736             "x-to-ocf": [
737               "oic.r.time.period.interval = Duration in Min(5825)"
738             ],
739             "x-from-ocf": [
740               "Duration in Min(5825) = oic.r.time.period.interval"
741             ]
742           }
743         }
744       }
745     }
746   }
```

```

744     "Event Identifier(5823)": {
745       "type": "string",
746       "description": "Identifier",
747       "x-ocf-conversion": {
748         "x-ocf-alias": "oic.r.time.period",
749         "x-to-ocf": [
750           "oic.r.time.period.id = Event Identifier(5823)"
751         ],
752         "x-from-ocf": [
753           "Event Identifier(5823) = oic.r.time.period.id"
754         ]
755       }
756     }
757   }
758 }
759 },
760
761 "type": "object",
762 "allOf": [
763   {"$ref": "#/definitions/lwm2m.o.loadcontrol"}
764 ],
765 "required": ["Start Time(5824)", "Duration in Min(5825)", "Event Identifier(5823)"]
766 }
767

```

768 9.10 Lock

769 9.10.1 Derived model

770 The derived model: "lwm2m.o.lock".

771 9.10.2 Property definition

772 Table 19 provides the detailed per Property mapping for "lwm2m.o.lock".

773 **Table 19 – The Property mapping for "lwm2m.o.lock".**

LWM2M Resource name	OCF Resource	To OCF	From OCF
Lock Status(50)	oic.r.lock.status	If(Lock Status(50) == 1) {oic.r.lock.status.lockState = "Locked";} else {oic.r.lock.status.lockState = "Unlocked";}	If(oic.r.lock.status.lockState == "Locked") {Lock Status(50) = 1;} else {Lock Status(50) = 0;}
Lock Name(1)	oic.r.lock.status	oic.r.lock.status.n = Lock Name(1);	Lock Name(1) = oic.r.lock.status.n

774 Table 20 provides the details of the Properties that are part of "lwm2m.o.lock".

775 **Table 20 – The Properties of "lwm2m.o.lock".**

LWM2M Resource name	Type	Required	Description
Lock Status(50)	boolean	no	The status of the lock, 1:Locked, 0:Unlocked.
Lock Name(1)	string	yes	Name

776 9.10.3 Derived model definition

```

777 {
778   "id": "http://openinterconnect.org/asamapping/schemas/asa.environment.currentairquality.json#",
779   "$schema": "http://json-schema.org/draft-04/schema#",
780   "description": "Copyright (c) 2017 Open Connectivity Foundation, Inc. All rights reserved.",
781   "title": "Buzzer",
782   "definitions": {
783     "lwm2m.o.lock": {
784       "type": "object",
785       "properties": {
786         "Lock Status(50)": {
787           "type": "boolean",

```

```

788         "description": "The status of the lock, 1:Locked, 0:Unlocked.",
789         "x-ocf-conversion": {
790             "x-ocf-alias": "oic.r.lock.status",
791             "x-to-ocf": [
792                 "If(Lock Status(50) == 1) {oic.r.lock.status.lockState = \"Locked\";} else
793 {oic.r.lock.status.lockState = \"Unlocked\";}\"
794             ],
795             "x-from-ocf": [
796                 "If(oic.r.lock.status.lockState == \"Locked\") {Lock Status(50) = 1;} else {Lock
797 Status(50) = 0;}\"
798             ]
799         }
800     },
801     "Lock Name(1)": {
802         "type": "string",
803         "description": "Name",
804         "x-ocf-conversion": {
805             "x-ocf-alias": "oic.r.lock.status",
806             "x-to-ocf": [
807                 "oic.r.lock.status.n = Lock Name(1);\"
808             ],
809             "x-from-ocf": [
810                 "Lock Name(1) = oic.r.lock.status.n\"
811             ]
812         }
813     }
814 }
815 }
816 },
817
818 "type": "object",
819 "allOf": [
820     {"$ref": "#/definitions/lwm2m.o.lock"}
821 ],
822 "required": ["Lock Name(1)"]
823 }
824

```

825 9.11 On/Off switch

826 9.11.1 Derived model

827 The derived model: "lwm2m.o.onoffswitch".

828 9.11.2 Property definition

829 Table 21 provides the detailed per Property mapping for "lwm2m.o.onoffswitch".

830 **Table 21 – The Property mapping for "lwm2m.o.onoffswitch".**

LWM2M Resource name	OCF Resource	To OCF	From OCF
Digital Input State (5500)	oic.r.switch.binary	oic.r.switch.binary.value = Digital Input State(5500)	Digital Input State(5500) = oic.r.switch.binary.value
Application Type (5750)	oic.r.switch.binary	oic.r.switch.binary.id = Application Type (5750)	Application Type (5750) = oic.r.switch.binary.id

831 Table 22 provides the details of the Properties that are part of "lwm2m.o.onoffswitch".

832 **Table 22 – The Properties of "lwm2m.o.onoffswitch".**

LWM2M Resource name	Type	Required	Description
Digital Input State (5500)	boolean	yes	The current state of a digital input.
Application Type (5750)	string	no	The application type of the sensor or actuator as a string depending on the use case.

833 **9.11.3 Derived model definition**

```

834 {
835   "id": "http://openinterconnect.org/asamapping/schemas/asa.environment.currentairquality.json#",
836   "$schema": "http://json-schema.org/draft-04/schema#",
837   "description": "Copyright (c) 2017 Open Connectivity Foundation, Inc. All rights reserved.",
838   "title": "On/Off switch",
839   "definitions": {
840     "lwm2m.o.onoffswitch": {
841       "type": "object",
842       "properties": {
843         "Digital Input State (5500)": {
844           "type": "boolean",
845           "description": "The current state of a digital input.",
846           "x-ocf-conversion": {
847             "x-ocf-alias": "oic.r.switch.binary",
848             "x-to-ocf": [
849               "oic.r.switch.binary.value = Digital Input State(5500)"
850             ],
851             "x-from-ocf": [
852               "Digital Input State(5500) = oic.r.switch.binary.value"
853             ]
854           }
855         },
856         "Application Type (5750)": {
857           "type": "string",
858           "description": "The application type of the sensor or actuator as a string depending on
859 the use case.",
860           "x-ocf-conversion": {
861             "x-ocf-alias": "oic.r.switch.binary",
862             "x-to-ocf": [
863               "oic.r.switch.binary.id = Application Type (5750)"
864             ],
865             "x-from-ocf": [
866               "Application Type (5750) = oic.r.switch.binary.id"
867             ]
868           }
869         }
870       }
871     }
872   },
873   "type": "object",
874   "allOf": [
875     {"$ref": "#/definitions/lwm2m.o.onoffswitch"}
876   ],
877   "required": ["Digital Input State (5500)"]
878 }
879
880

```

881 **9.12 Position**

882 **9.12.1 Derived model**

883 The derived model: "lwm2m.o.position".

884 **9.12.2 Property definition**

885 Table 23 provides the detailed per Property mapping for "lwm2m.o.position".

886 **Table 23 – The Property mapping for "lwm2m.o.position".**

LWM2M Resource name	OCF Resource	To OCF	From OCF
Current Position (5536)	oic.r.openlevel	oic.r.openlevel.openLevel = Current Position(5536)	Current Position(5536) = oic.r.openlevel.openLevel
Min Limit (5520)	oic.r.openlevel	oic.r.openlevel.ragne[0] = Min Limit (5520)	Min Limit (5520) = oic.r.openlevel.ragne[0]
Max Limit (5750)	oic.r.openlevel	oic.r.openlevel.ragne[1]= Max Limit (5750)	Max Limit (5750) = oic.r.openlevel.ragne[1]

887 Table 24 provides the details of the Properties that are part of "lwm2m.o.position".

888 **Table 24 – The Properties of "lwm2m.o.position".**

LWM2M Resource name	Type	Required	Description
Current Position (5536)	float	no	Current position or desired position of a positioner actuator.
Min Limit (5520)	float	no	The minimum value that can be measured by the sensor.
Max Limit (5750)	float	no	The maximum value that can be measured by the sensor.

889 **9.12.3 Derived model definition**

```
890 {
891   "id": "http://openinterconnect.org/asamapping/schemas/asa.environment.currentairquality.json#",
892   "$schema": "http://json-schema.org/draft-04/schema#",
893   "description": "Copyright (c) 2017 Open Connectivity Foundation, Inc. All rights reserved.",
894   "title": "Position",
895   "definitions": {
896     "lwm2m.o.position": {
897       "type": "object",
898       "properties": {
899         "Current Position (5536)": {
900           "type": "float",
901           "description": "Current position or desired position of a positioner actuator.",
902           "x-ocf-conversion": {
903             "x-ocf-alias": "oic.r.openlevel",
904             "x-to-ocf": ["oic.r.openlevel.openLevel = Current Position(5536)"]
905           },
906           "x-from-ocf": [
907             "Current Position(5536) = oic.r.openlevel.openLevel"
908           ]
909         },
910         "Min Limit (5520)": {
911           "type": "float",
912           "description": "The minimum value that can be measured by the sensor.",
913           "x-ocf-conversion": {
914             "x-ocf-alias": "oic.r.openlevel",
915             "x-to-ocf": [
916               "oic.r.openlevel.ragne[0] = Min Limit (5520)"
917             ],
918             "x-from-ocf": [
919               "Min Limit (5520) = oic.r.openlevel.ragne[0]"
920             ]
921           },
922         },
923         "Max Limit (5750)": {
924           "type": "float",
925           "description": "The maximum value that can be measured by the sensor.",
926           "x-ocf-conversion": {
927             "x-ocf-alias": "oic.r.openlevel",
928             "x-to-ocf": [
929               "oic.r.openlevel.ragne[1]= Max Limit (5750)"
930             ],
931             "x-from-ocf": [
932               "Max Limit (5750) = oic.r.openlevel.ragne[1]"
933             ]
934           },
935         }
936       }
937     }
938   },
939   "type": "object",
940 }
```



```

942     "allOf": [
943       {"$ref": "#/definitions/lwm2m.o.position"}
944     ],
945     "required": ["Current Position(5536)"]
946   }
947

```

948 9.13 Power

949 9.13.1 Derived model

950 The derived model: "lwm2m.o.power".

951 9.13.2 Property definition

952 Table 25 provides the detailed per Property mapping for "lwm2m.o.power".

953 **Table 25 – The Property mapping for "lwm2m.o.power".**

LWM2M Resource name	OCF Resource	To OCF	From OCF
Sensor Value (5700)	oic.r.energy.consumption	oic.r.energy.consumption.power = Sensor Value(5700)	Sensor Value(5700) = oic.r.energy.consumption.power
Application Type (5750)	oic.r.energy.consumption		Application Type (5750) = "Power consumption"

954 Table 26 provides the details of the Properties that are part of "lwm2m.o.power".

955 **Table 26 – The Properties of "lwm2m.o.power".**

LWM2M Resource name	Type	Required	Description
Sensor Value (5700)	float	yes	Last or Current Measured Value from the Sensor. (power measurements)
Application Type (5750)	float	no	The application type of the sensor or actuator as a string depending on the use case.

956 9.13.3 Derived model definition

```

957 {
958   "id": "http://openinterconnect.org/asamapping/schemas/asa.environment.currentairquality.json#",
959   "$schema": "http://json-schema.org/draft-04/schema#",
960   "description": "Copyright (c) 2017 Open Connectivity Foundation, Inc. All rights reserved.",
961   "title": "Power",
962   "definitions": {
963     "lwm2m.o.power": {
964       "type": "object",
965       "properties": {
966         "Sensor Value (5700)": {
967           "type": "float",
968           "description": "Last or Current Measured Value from the Sensor. (power measurements)",
969           "x-ocf-conversion": {
970             "x-ocf-alias": "oic.r.energy.consumption",
971             "x-to-ocf": ["oic.r.energy.consumption.power = Sensor Value(5700)"]
972           },
973           "x-from-ocf": [
974             "Sensor Value(5700) = oic.r.energy.consumption.power"
975           ]
976         }
977       },
978       "Application Type (5750)": {
979         "type": "float",
980         "description": "The application type of the sensor or actuator as a string depending on
981 the use case.",
982         "x-ocf-conversion": {
983           "x-ocf-alias": "oic.r.energy.consumption",

```

```

984         "x-to-ocf": [           ""],
985         "x-from-ocf": [
986             "Application Type (5750) = "Power consumption"
987         ]
988     }
989 }
990 }
991 }
992 },
993
994 "type": "object",
995 "allOf": [
996     {"$ref": "#/definitions/lwm2m.o.power"}
997 ],
998 "required": ["Sensor Value (5700)"]
999 }
1000

```

1001 9.14 Temperature

1002 9.14.1 Derived model

1003 The derived model: "lwm2m.o.temperature".

1004 9.14.2 Property definition

1005 Table 27 provides the detailed per Property mapping for "lwm2m.o.temperature".

1006 **Table 27 – The Property mapping for "lwm2m.o.temperature".**

LWM2M Resource name	OCF Resource	To OCF	From OCF
Sensor Value (5700)	oic.r.temperature	oic.r.temperature.temperature = Sensor Value(5700)	Sensor Value(5700) = oic.r.temperature.temperature
Sensor units (5701)	oic.r.temperature	oic.r.temperature.units = Sensor units (5701)	Sensor units (5701) = oic.r.temperature.units
Min Range Value (5603)	oic.r.temperature	oic.r.temperature.range[0] = Min Range Value (5603)	Min Range Value (5603) = oic.r.temperature.range[0]
Max Range Value (5604)	oic.r.temperature	oic.r.temperature.range[1] = Max Range Value (5604)	Max Range Value (5604) = oic.r.temperature.range[1]

1007 Table 28 provides the details of the Properties that are part of "lwm2m.o.temperature".

1008 **Table 28 – The Properties of "lwm2m.o.temperature".**

LWM2M Resource name	Type	Required	Description
Sensor Value (5700)	float	yes	Last or Current Measured Value from the Sensor.
Sensor units (5701)	string	no	Measurement Units Definition.
Min Range Value (5603)	float	no	The minimum value that can be measured by the sensor.
Max Range Value (5604)	float	no	The maximum value that can be measured by the sensor.

1009 9.14.3 Derived model definition

```

1010 {
1011     "id": "http://openinterconnect.org/asamapping/schemas/asa.environment.currentairquality.json#",
1012     "$schema": "http://json-schema.org/draft-04/schema#",
1013     "description": "Copyright (c) 2017 Open Connectivity Foundation, Inc. All rights reserved.",
1014     "title": "Temperature",
1015     "definitions": {

```

```

1016     "lwm2m.o.temperature": {
1017         "type": "object",
1018         "properties": {
1019             "Sensor Value (5700)": {
1020                 "type": "float",
1021                 "description": "Last or Current Measured Value from the Sensor.",
1022                 "x-ocf-conversion": {
1023                     "x-ocf-alias": "oic.r.temperature",
1024                     "x-to-ocf": [
1025                         "oic.r.temperature.temperature = Sensor Value(5700)"
1026                     ],
1027                     "x-from-ocf": [
1028                         "Sensor Value(5700) = oic.r.temperature.temperature"
1029                     ]
1030                 }
1031             },
1032             "Sensor units (5701)": {
1033                 "type": "string",
1034                 "description": "Measurement Units Definition.",
1035                 "x-ocf-conversion": {
1036                     "x-ocf-alias": "oic.r.temperature",
1037                     "x-to-ocf": [
1038                         "oic.r.temperature.units = Sensor units (5701)"
1039                     ],
1040                     "x-from-ocf": [
1041                         "Sensor units (5701) = oic.r.temperature.units"
1042                     ]
1043                 }
1044             },
1045             "Min Range Value (5603)": {
1046                 "type": "float",
1047                 "description": "The minimum value that can be measured by the sensor.",
1048                 "x-ocf-conversion": {
1049                     "x-ocf-alias": "oic.r.temperature",
1050                     "x-to-ocf": [
1051                         "oic.r.temperature.range[0] = Min Range Value (5603)"
1052                     ],
1053                     "x-from-ocf": [
1054                         "Min Range Value (5603) = oic.r.temperature.range[0]"
1055                     ]
1056                 }
1057             }, "Max Range Value (5604)": {
1058                 "type": "float",
1059                 "description": "The maximum value that can be measured by the sensor.",
1060                 "x-ocf-conversion": {
1061                     "x-ocf-alias": "oic.r.temperature",
1062                     "x-to-ocf": [
1063                         "oic.r.temperature.range[1] = Max Range Value (5604)"
1064                     ],
1065                     "x-from-ocf": [
1066                         "Max Range Value (5604) = oic.r.temperature.range[1]"
1067                     ]
1068                 }
1069             }
1070         }
1071     },
1072 },
1073
1074     "type": "object",
1075     "allOf": [
1076         {"$ref": "#/definitions/lwm2m.o.temperature"}
1077     ],
1078     "required": ["Sensor Value (5700)"]
1079 }
1080

```