


.25-06 REMINGTON

The .25-06, introduced by Remington in 1969, was originally a wildcat loading. It dates back to 1920 when it was developed by A. O. Niedner and was made by necking the .30-06 case down to .25 caliber.

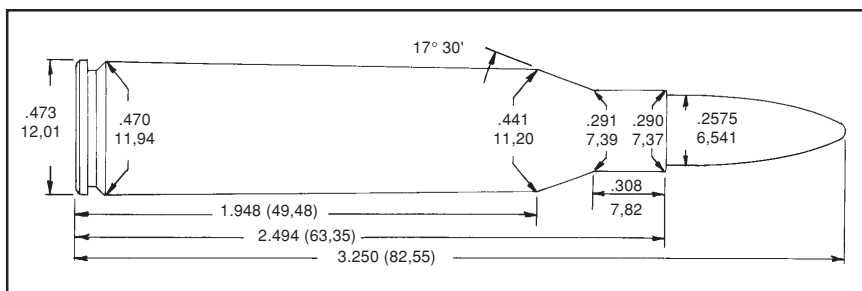

The .25-06 was unable to achieve its full performance potential until the release of surplus 4350 and 4831 propellants following WWII. With the advent of these slower burning propellants, the .25-06 emerged as the finest of the .25 caliber wildcats. It was suitable for both varmint hunting at extreme ranges and, in the hands of a skilled hunter, most big game in North America.

Today, the .25-06 Remington is offered by almost every manufacturer of bolt action rifles sold in the United States.

The SAAMI Maximum Average Pressure for this cartridge is 63,000 P.S.I. **Accurate 3100** is an excellent choice for most bullet weights in this cartridge.

.25-06 REMINGTON				
Gun	Wiseman	Max Length	2.494"	
Barrel Length	24"	Trim Length	2.474"	
Primer	CCI 250	OAL Max	3.250"	
Case	REM	OAL Min	3.010"	

Bullet	START LOADS			MAXIMUM LOADS			P.S.I.	Cartridge Length	Comment
	Powder	Grains	Vel.	Powder	Grains	Vel.			
100 (L) FNGC	5744	19.8	1823	5744	22.0	2072	24,000	2.950"	Penny's Consistent
	8700	48.6	2124	8700	54.0	2414	29,500		
SRA 75 HP	2700	47.7	3302	2700	53.0	3753	62,500	3.065"	Compressed Compressed
	4350	53.1	3326	4350	59.0	3780	61,400		
	3100	54.0	3154	3100	60.0	3585	57,900		
SRA 90 HP	2700	45.0	3006	2700	50.0	3416	62,500	3.075"	Compressed
	4350	48.6	3055	4350	54.0	3472	62,900		
	3100	50.9	2965	3100	56.5	3370	59,700		
NOS 100 BT	2700	43.2	2827	2700	48.0	3213	63,000	3.190"	Compressed Compressed
	4350	46.8	2880	4350	52.0	3273	62,200		
	3100	49.5	2889	3100	55.0	3283	63,000		
	8700	58.5	2501	8700	65.0	2843	44,800		

.25-06 REMINGTON (continued)

Bullet	START LOADS			MAXIMUM LOADS			P.S.I.	Cartridge Length	Comment
	Powder	Grains	Vel.	Powder	Grains	Vel.			
NOS 115 (Part)	2700	41.1	2595	2700	45.7	2949	60,500	3.195"	
	4350	44.5	2686	4350	49.5	3053	60,600		
	3100	47.5	2691	3100	52.8	3059	61,400		
	8700	57.6	2466	8700	64.0	2803	46,900	Compressed	
SRA 120 SPBT	2700	40.5	2545	2700	45.0	2893	62,800	3.120"	
	4350	44.1	2588	4350	49.0	2942	60,600		
	3100	46.8	2620	3100	52.0	2978	61,200		
	8700	57.6	2396	8700	64.0	2723	44,500	Compressed	

Caliber 25-06Remington

Case length

Min: 2.474

Barrel: Wiseman 24"

Max: 2.494

Case: Remington

Cartridge length

Min: 3.010

Primer: CCI 200

Max: 3.250

Bullet Make Type	Bullet Weight Grains	Powder Type	Start Load grains	Start Velocity Fps	Start Pressure kPsi	Maximum Load Grains	Maximum Velocity Fps	Maximum Pressure kPsi	AOL inches
Hornady SPFB	87	Magpro	56.3	3261	49.2	62.5	3573	60.9	3.100
Hornady Spire HP	120	Magpro	48.6	2777	49.8	54.0	3039	61.6	3.200

WARNING!! ALWAYS BEGIN LOADING AT THE RECOMMENDED MINIMUM OR "START" LOAD